

JA3503 (HF3503)

DELAYING RELAY



Features

- Solid base design, stable structure
- Maturing circuit, stable and reliable performances
- Surface mounting technology, advanced craftwork
- Cover copperplates on both sides to assure large current through

Typical Applications

Delaying control of lamp, Oil pump & radiator

CHARACTERISTICS


Norminal voltage	12VDC	Ambient temperature	-40°C to 85°C
Operating voltage range	9VDC to 16VDC	Electrical endurance	1×10 ⁵ OPS (at nomi. vol.)
Contact rating	Resistive: 40A 13.5VDC	Vibration resistance	10Hz to 200Hz 49m/s ² (5g)
	Motor: Inrush 100A, Stable 20A	Shock resistance	196m/s ² (20g)
Delaying time ¹⁾	2s ± 0.5s	Weight	Approx. 40g
Operate voltage	9.0VDC max.	Mechanical data	cover retention (pull & push): 250N min.
Release voltage	1.2VDC min.		terminal retention (pull & push): 110N min.

1) When demand of time delay is different from above, please contact Hongfa for more technology support.

OUTLINE DIMENSIONS AND WIRING DIAGRAM


Unit: mm

Wiring Diagram

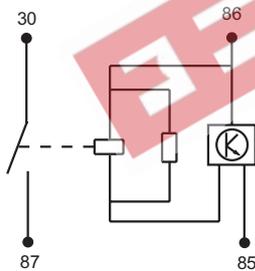


1. As shown in left wiring diagram, for JA3503, terminal 86 is connected with anode of 12VDC, terminal 85 with cathode of battery, and terminal 30 with anode of electric power, terminal 87 with load.
2. When terminal 86 is powered with 12VDC, after 2s ± 0.5s time delay, electromagnetic relay runs, making terminal 30 and 87 close.

Terminal Layout

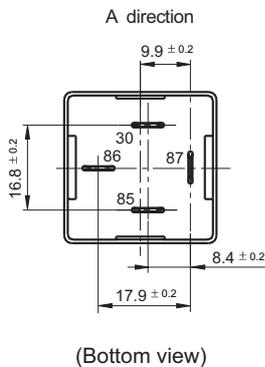

Outline Dimensions

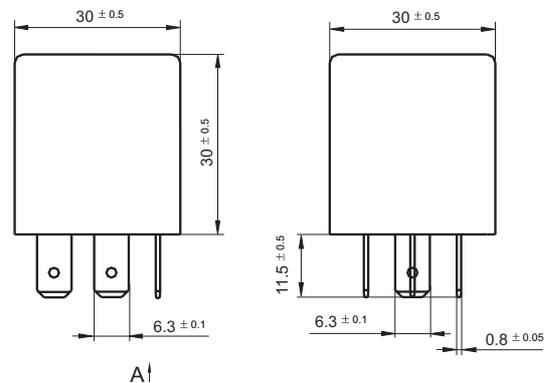

HONGFA RELAY

ISO9001、ISO/TS16949、ISO14001、OHSAS18001 CERTIFIED

2007 Rev. 1.00