


Kilovac K81C Make & Break Load Switching

Features:

- SPDT version of K81
- Vacuum dielectric for power switching low current loads
- Flying Lead version will carry 10 Amps continuous current
- PCB mount version will carry 5 Amps continuous current

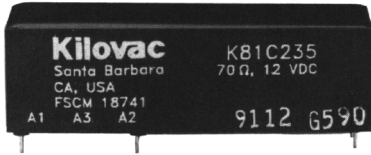

EEPW.com.cn 电子产品世界

PRODUCT SPECIFICATIONS		
Part Number	Units	K81C
Contact Arrangement		SPDT
Contact Form		C
Test Voltage (dc or 60Hz)	kV Peak	11
Rated Operating Voltage	kV Peak	
dc or 60 Hz		10
2.5 MHz		-
16 MHz		-
32 MHz		-
Continuous Carry Current , Maximum	Amps	
dc or 60 Hz		5
2.5 MHz		-
16 MHz		-
32 MHz		-
Coil Hi-Pot (V RMS, 60 Hz)		NA
Contact Capacitance	pF	
Between Open Contacts		-
Open Contacts to Ground		-
Contact Resistance, Maximum	ohms	0.05
Operate Time, Maximum	ms	10
Release Time, Maximum	ms	10
Shock, 11 ms 1/2 Sine	Peak G's	30
Vibration, 10 G's Peak	Hz	55-500
Operating Ambient Temperature Range	°C	-55 to +85
Mechanical Life (Operations x 10 ⁶)	Cycles	2
Weight, Nominal	oz.	2.5

COIL DATA			
Nominal, Volts dc	12	26.5	115
Pickup, Volts dc, Maximum	8	16	80
Drop-Out, Volts dc	.5 - 5	1 - 10	5 - 50
Coil Resistance (Ohms ±10%)	70	290	4700

Ratings listed are for 25°C, sea level conditions

PART NUMBER SELECTION					
Sample Part No.	K81	C	3	3	5
Contact Form		C			
Coil Voltage			3	3	5
2 = 12 Vdc, PC Board					
3 = 26.5 Vdc, PC Board					
5 = 115 Vdc, PC Board					
High Voltage Connections					
3 = PCB Solder Connection					
4 = Flying Leads					
Mounting					
5 = PC Board					