



# SAW Components

Data Sheet K 7254 M

Data Sheet

**EEPW**

電子產品世界  
com.cn

**EPCOS**



**SAW Components**

**K 7254 M**

**IF Filter for Intercarrier / Multistandard Applications**

**38,00 MHz**

**Data Sheet**


**Standard**

- B/G
- D/K
- M/N

Plastic package **SIP5K**

**Features**

- TV IF filter switchable from B/G, D/K mode to M/N mode
- M/N mode with Nyquist slope and sound shelf
- Customized group delay predistortion
- B/G, D/K mode with Nyquist slope and sound suppressant
- Customized group delay predistortion

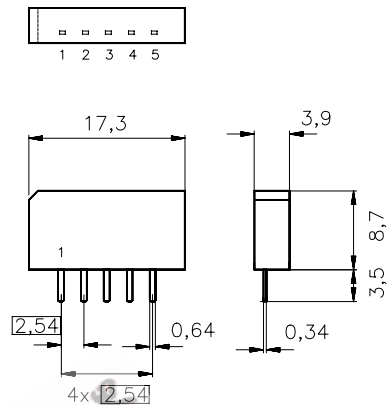


**Terminals**

- Tinned CuFe alloy

Dimensions in mm, approx. weight 1,0 g

**Pin configuration**

- 1 Input
- 2 Switching input
- 3 Chip carrier - ground
- 4,5 Output

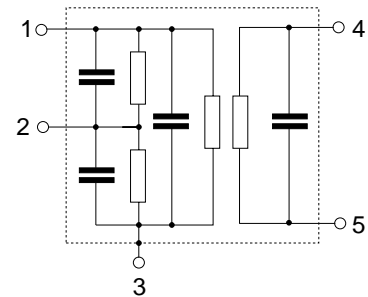

Type	Ordering code	Marking and package according to	Packing according to
K 7254 M	B39380-K7254-M100	C61157-A1-A15	F61074-V8067-Z000

**Maximum ratings**

Operable temperature range	$T_A$	-25/+65	°C	
Storage temperature range	$T_{stg}$	-40/+85	°C	
DC voltage	$V_{DC}$	5	V	between any terminals
AC voltage	$V_{pp}$	10	V	between any terminals



<b>SAW Components</b>	<b>K 7254 M</b>
<b>IF Filter for Intercarrier / Multistandard Applications</b>	<b>38,00 MHz</b>

**Data Sheet**

**Characteristics in B/G, D/K mode (switching input pin 2 connected to ground)**

Reference temperature:  $T_A = 25\text{ }^\circ\text{C}$   
 Terminating source impedance:  $Z_S = 50\text{ }\Omega$   
 Terminating load impedance:  $Z_L = 2\text{ k}\Omega \parallel 3\text{ pF}$

		min.	typ.	max.	
<b>Insertion attenuation</b>					
	$\alpha$				
Reference level for the following data	36,50 MHz	14,3	15,8	17,3	dB
<b>Relative attenuation</b>					
	$\alpha_{rel}$				
Picture carrier	38,00 MHz	5,2	6,2	7,2	dB
Color carrier	33,57 MHz	0,2	1,2	2,2	dB
Sound carrier	31,50 MHz	46,0	63,0	—	dB
	32,50 MHz	36,0	48,0	—	dB
Adjacent picture carrier	30,00 MHz	44,0	55,0	—	dB
	31,00 MHz	42,0	55,0	—	dB
Adjacent sound carrier	39,50 MHz	40,0	51,0	—	dB
	40,50 MHz	40,0	53,0	—	dB
Lower sidelobe	25,00 ..... 29,20 MHz	42,0	51,0	—	dB
Upper sidelobe	39,50 ..... 45,00 MHz	34,0	39,0	—	dB
<b>Reflected wave signal suppression</b>					
1,3 $\mu\text{s}$ ... 6,0 $\mu\text{s}$ after main pulse (test pulse 250 ns, carrier frequency 36,50 MHz)		42,0	50,0	—	dB
<b>Feedthrough signal suppression</b>					
1,2 $\mu\text{s}$ ... 1,1 $\mu\text{s}$ before main pulse (test pulse 250 ns, carrier frequency 36,50 MHz)		50,0	56,0	—	dB
<b>Group delay predistortion</b>					
	$\Delta\tau$				
(reference frequency 38,00 MHz)					
	33,57 MHz	—	-60	—	ns
<b>Impedance at 36,50 MHz</b>					
Input: $Z_{IN} = R_{IN} \parallel C_{IN}$		—	1,1 $\parallel$ 18,4	—	k $\Omega$ $\parallel$ pF
Output: $Z_{OUT} = R_{OUT} \parallel C_{OUT}$		—	1,5 $\parallel$ 4,5	—	k $\Omega$ $\parallel$ pF
<b>Temperature coefficient of frequency</b>					
	$TC_f$	—	-72	—	ppm/K



**SAW Components**

**K 7254 M**

**IF Filter for Intercarrier / Multistandard Applications**

**38,00 MHz**

**Data Sheet**

**Characteristics in M/N mode (switching input pin 2 connected to pin 1)**

Reference temperature:  $T_A = 25\text{ °C}$   
 Terminating source impedance:  $Z_S = 50\ \Omega$   
 Terminating load impedance:  $Z_L = 2\text{ k}\Omega \parallel 3\text{ pF}$

		min.	typ.	max.	
<b>Insertion attenuation</b>					
	$\alpha$				
Reference level for the following data	36,50 MHz	14,2	15,7	17,2	dB
<b>Relative attenuation</b>					
	$\alpha_{rel}$				
Picture carrier	38,00 MHz	5,3	6,3	7,3	dB
Color carrier	34,42 MHz	2,3	3,3	4,3	dB
Sound carrier	33,50 MHz	18,6	20,1	21,6	dB
Adjacent picture carrier	32,00 MHz	43,0	51,0	—	dB
Adjacent sound carrier	39,50 MHz	42,0	56,0	—	dB
Lower sidelobe	25,00 ..... 32,00 MHz	40,0	46,0	—	dB
Upper sidelobe	39,50 ..... 45,00 MHz	36,0	42,0	—	dB
<b>Reflected wave signal suppression</b>					
1,3 $\mu$ s ... 6,0 $\mu$ s after main pulse (test pulse 250 ns, carrier frequency 36,50 MHz)		42,0	50,0	—	dB
<b>Feedthrough signal suppression</b>					
1,2 $\mu$ s ... 1,1 $\mu$ s before main pulse (test pulse 250 ns, carrier frequency 36,50 MHz)		—	50,0	—	dB
<b>Group delay predistortion</b>					
(reference frequency 38,00 MHz)					
	$\Delta\tau$				
	34,42 MHz	—	-60	—	ns
<b>Impedance at 36,50 MHz</b>					
Input: $Z_{IN} = R_{IN} \parallel C_{IN}$		—	1,2 $\parallel$ 20,3	—	k $\Omega$ $\parallel$ pF
Output: $Z_{OUT} = R_{OUT} \parallel C_{OUT}$		—	1,5 $\parallel$ 4,5	—	k $\Omega$ $\parallel$ pF
<b>Temperature coefficient of frequency</b>					
$TC_f$		—	-72	—	ppm/K



SAW Components



K 7254 M

IF Filter for Intercarrier / Multistandard Applications

38,00 MHz

Data Sheet

Frequency response B/G, D/K mode

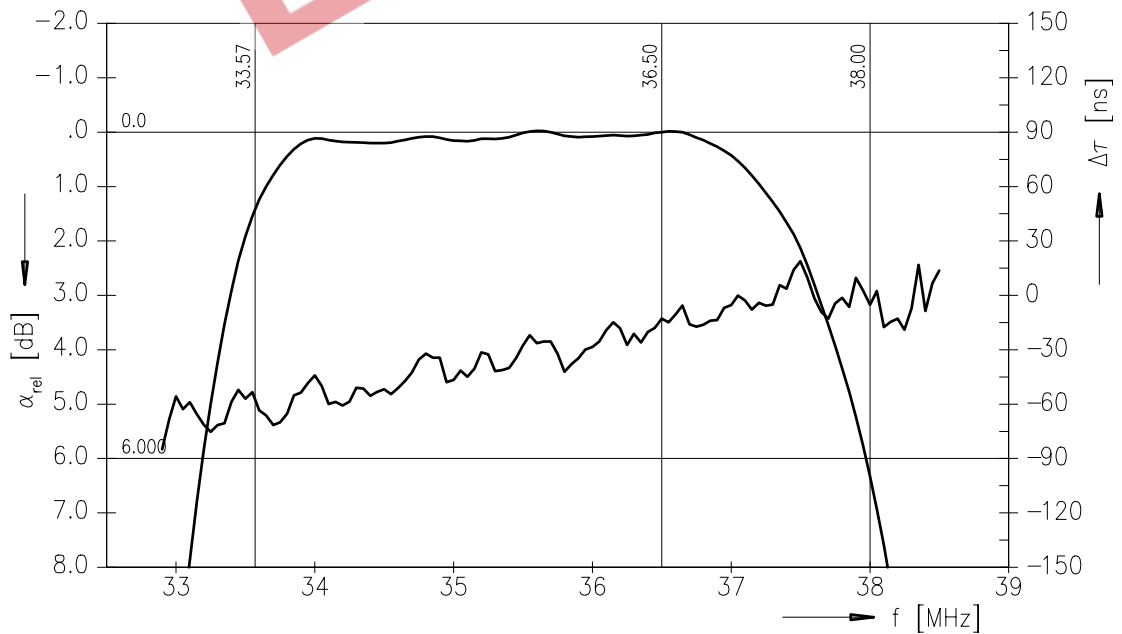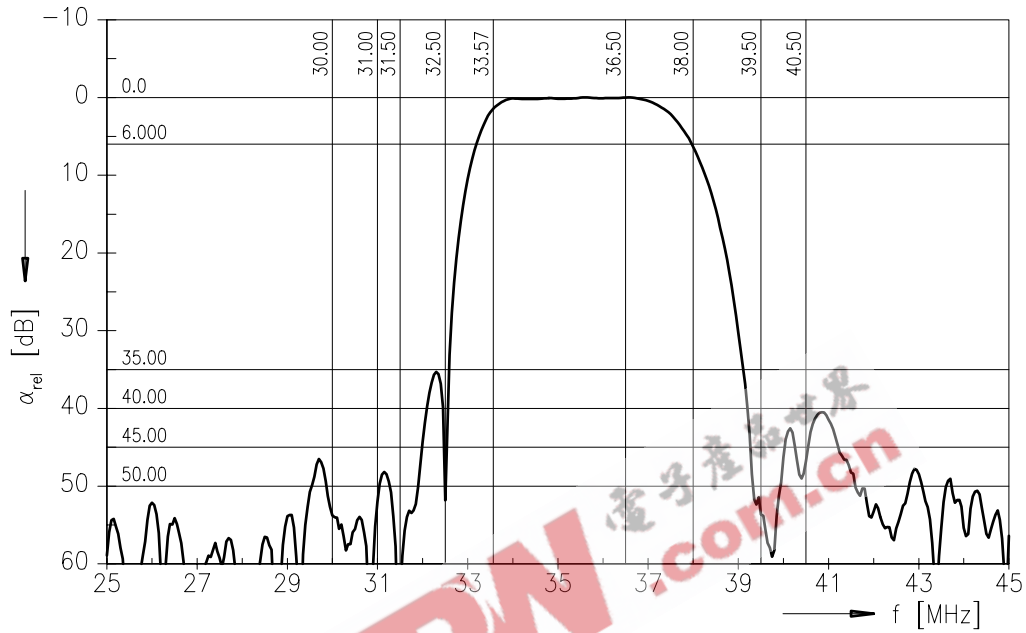



SAW Components


K 7254 M

IF Filter for Intercarrier / Multistandard Applications


38,00 MHz

Data Sheet

Frequency response B/G, D/K mode

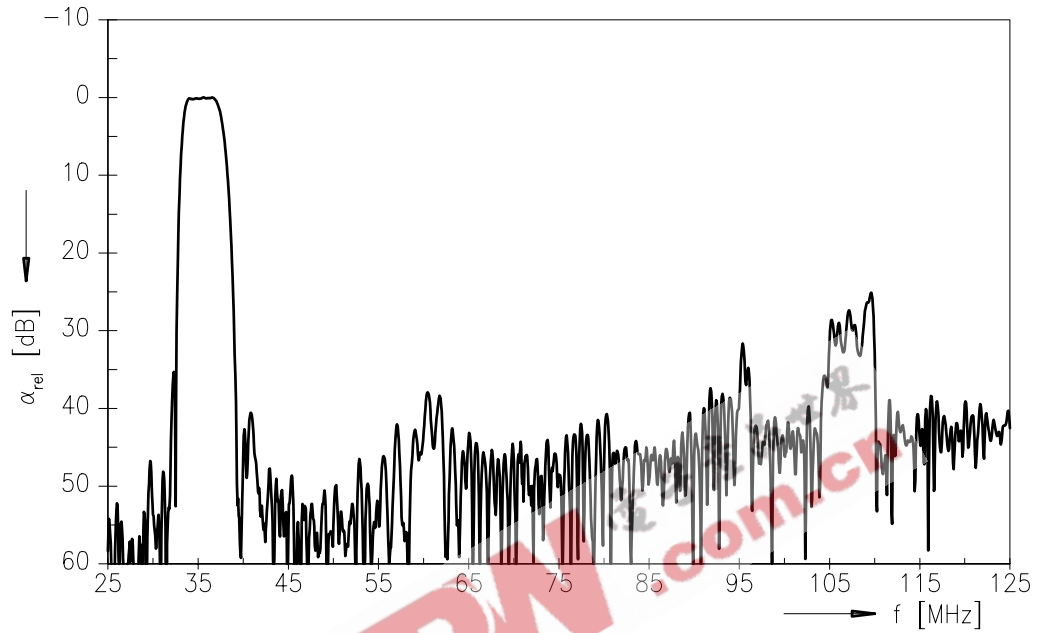

Time domain response B/G, D/K mode

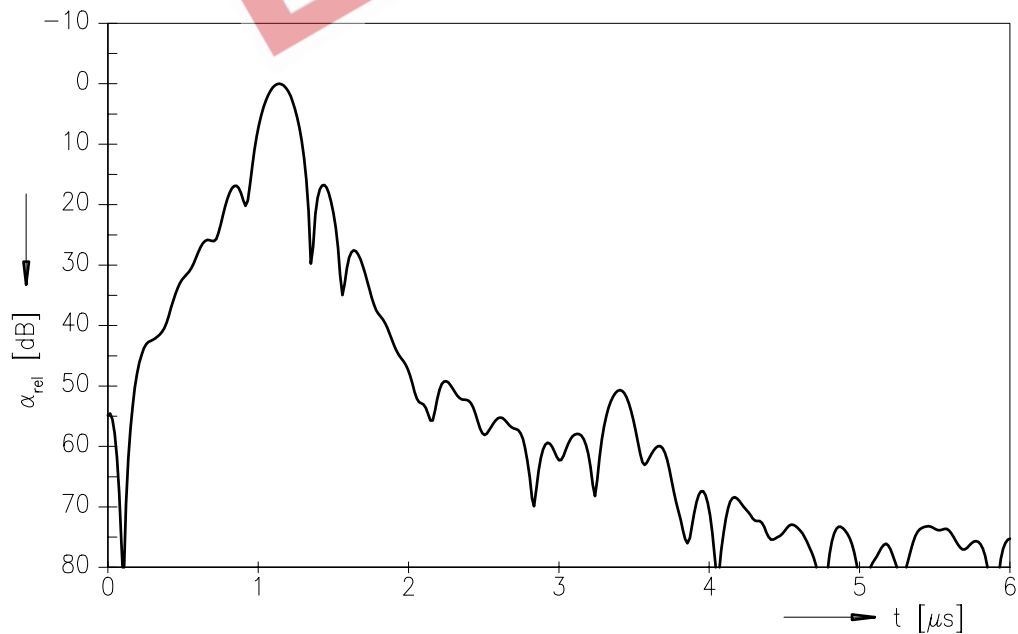



SAW Components



K 7254 M

IF Filter for Intercarrier / Multistandard Applications

38,00 MHz

Data Sheet

Frequency response M/N mode

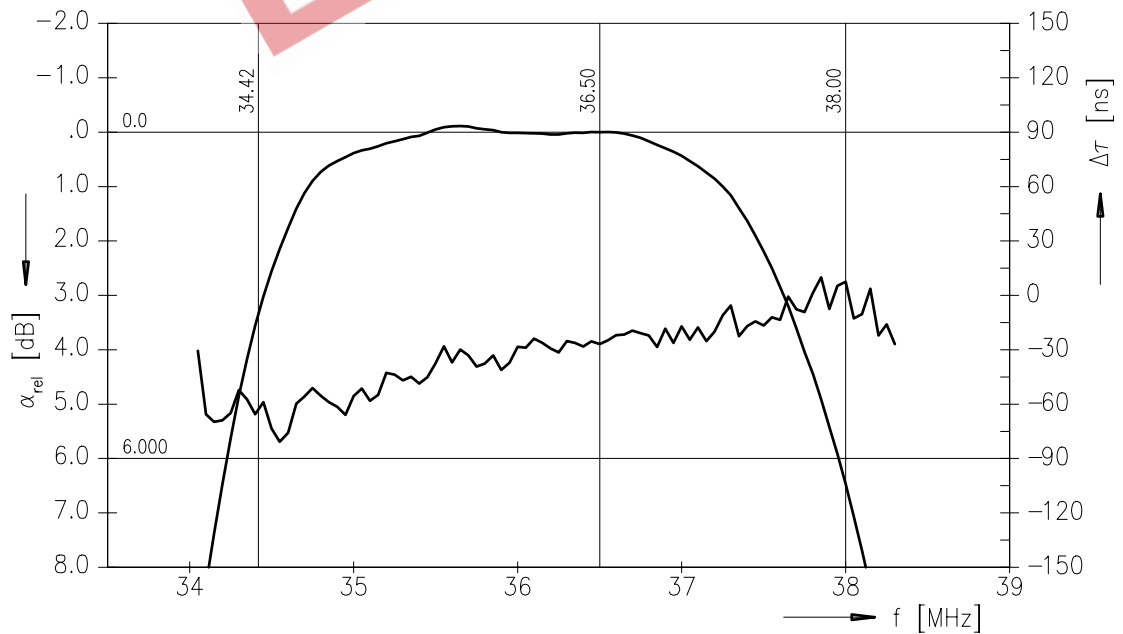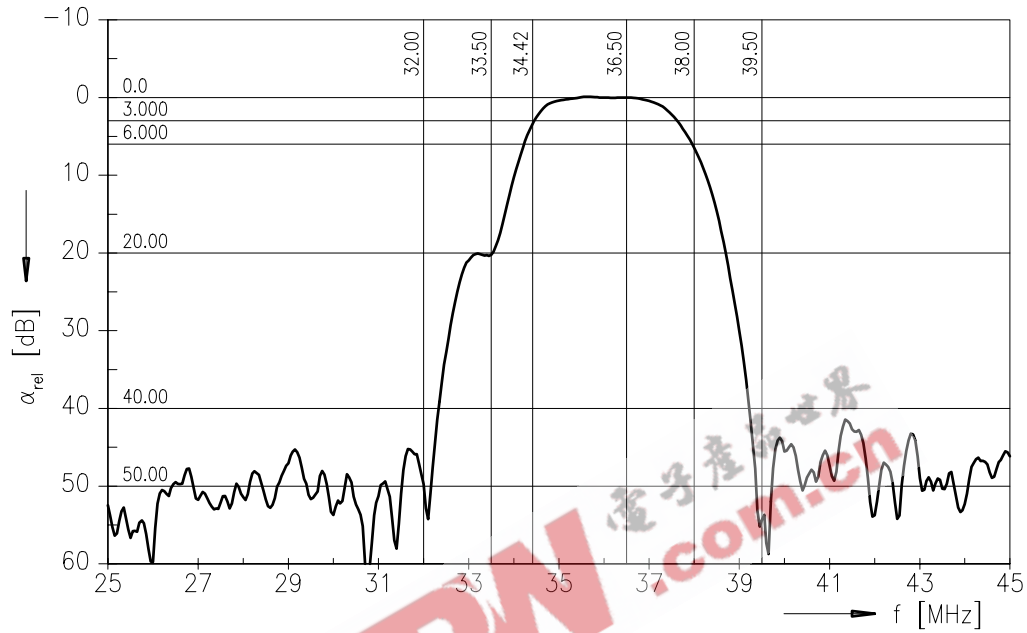



SAW Components


K 7254 M

IF Filter for Intercarrier / Multistandard Applications


38,00 MHz

Data Sheet

Frequency response M/N mode

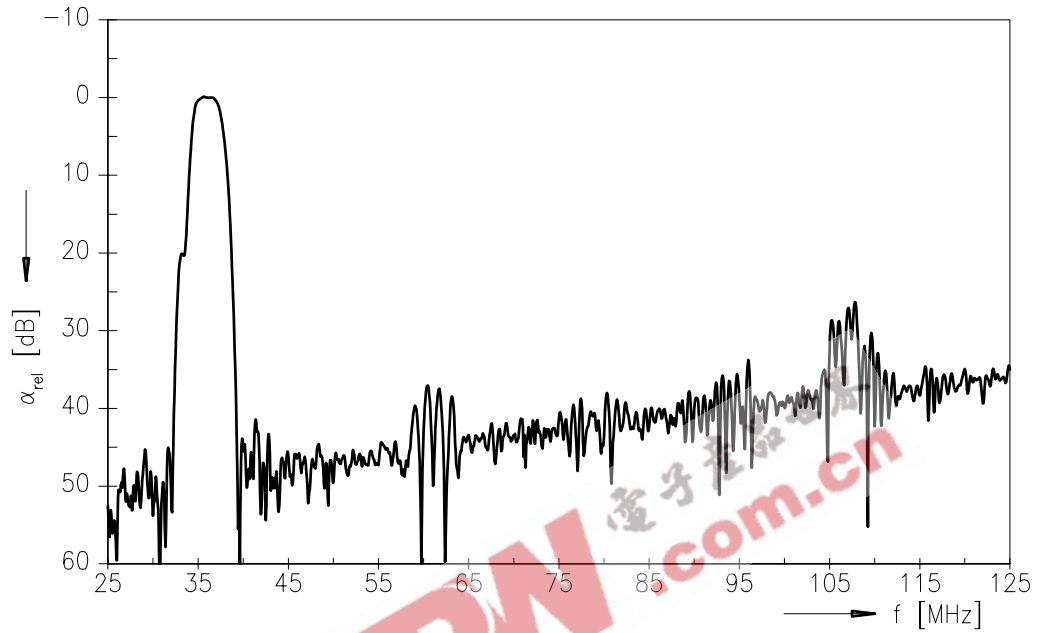

Time domain response M/N mode

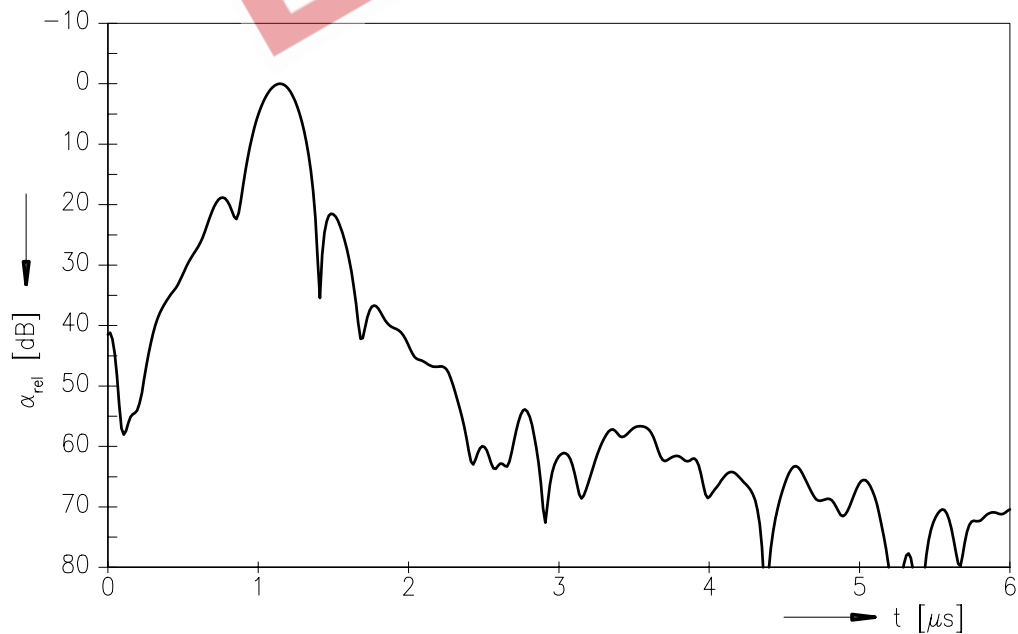





**SAW Components**

**K 7254 M**

**IF Filter for Intercarrier / Multistandard Applications**

**38,00 MHz**

Data Sheet

EEPW 电子产品世界 .com.cn

**Published by EPCOS AG**

**Surface Acoustic Wave Components Division, SAW CE MM PD**

**P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2003. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.