


**10 to 40 Amp
SINGLE PHASE SILICON BRIDGE**

Description

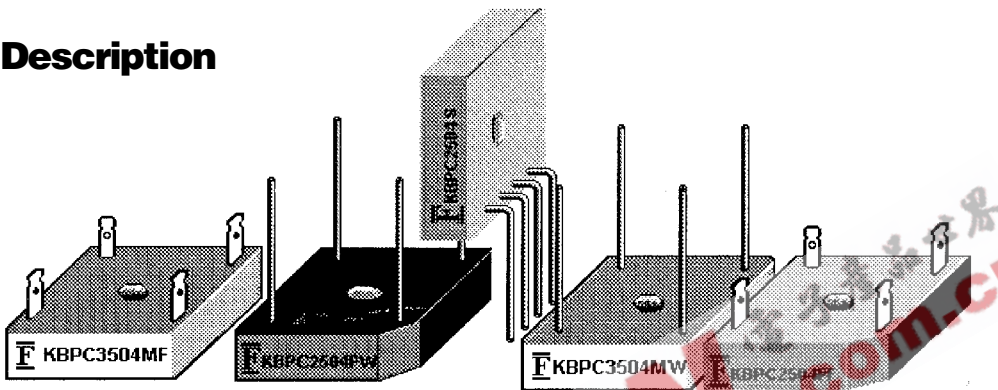

KBPC10XX . . . 40XX Series

Features

- BUILT-IN INTEGRAL HEAT SINK
- UP TO 400 AMP SURGE OVERLOAD RATING
- UL RECOGNITION AVAILABLE
- OPTION OF WIRE LEADS OR FASTON TERMINALS


Electrical Characteristics @ 25°C.		KBPC10 . . . 40XX Series								Units
Maximum Ratings		-00	-01	-02	-04	-06	-08	-10	-12	
Peak Repetitive Reverse Voltage... V_{RRM}		50	100	200	400	600	800	1000	1200	Volts
RMS Reverse Voltage... $V_{R(rms)}$		35	70	140	280	420	560	700	840	Volts
DC Blocking Voltage... V_{DC}		50	100	200	400	600	800	1000	1200	Volts
Average Forward Rectified Current... $I_{F(av)}$	KBPC10 10								Amps
	KBPC15 15								Amps
	KBPC25 25								Amps
	KBPC35 35								Amps
	KBPC40 40								Amps
Non-Repetitive Peak Forward Surge Current... I_{FSM}	KBPC10 200								Amps
	KBPC15 300								Amps
	KBPC25 300								Amps
	KBPC35 400								Amps
	KBPC40 400								Amps
Forward Voltage... V_F	KBPC10, $I_F = 5A$ 1.1								Volts
	KBPC15, $I_F = 7.5A$ 1.1								Volts
	KBPC25, $I_F = 12.5A$ 1.1								Volts
	KBPC35, $I_F = 17.5A$ 1.1								Volts
	KBPC40, $I_F = 20.0A$ 1.1								Volts
Isolation Voltage Case to Leads... V_{ISO}	 2500								Volts AC
DC Reverse Current... I_R	 5.0								μ Amps
@ Rated DC Blocking Voltage per Leg	$T_A = 25^\circ C$ 500								μ Amps
	$T_A = 125^\circ C$ 1.9								$^\circ C / W$
Typical Thermal Resistance... $R_{\theta JC}$	Junction to Case per Leg 300								pF
Typical Junction Capacitance... C_J	 -55 to 150								$^\circ C$
Operating & Storage Temperature Range... T_J, T_{STRG}										





Data Sheet

10 to 40 Amp SINGLE PHASE SILICON BRIDGE

KBPC10XX . . . 40XX Series

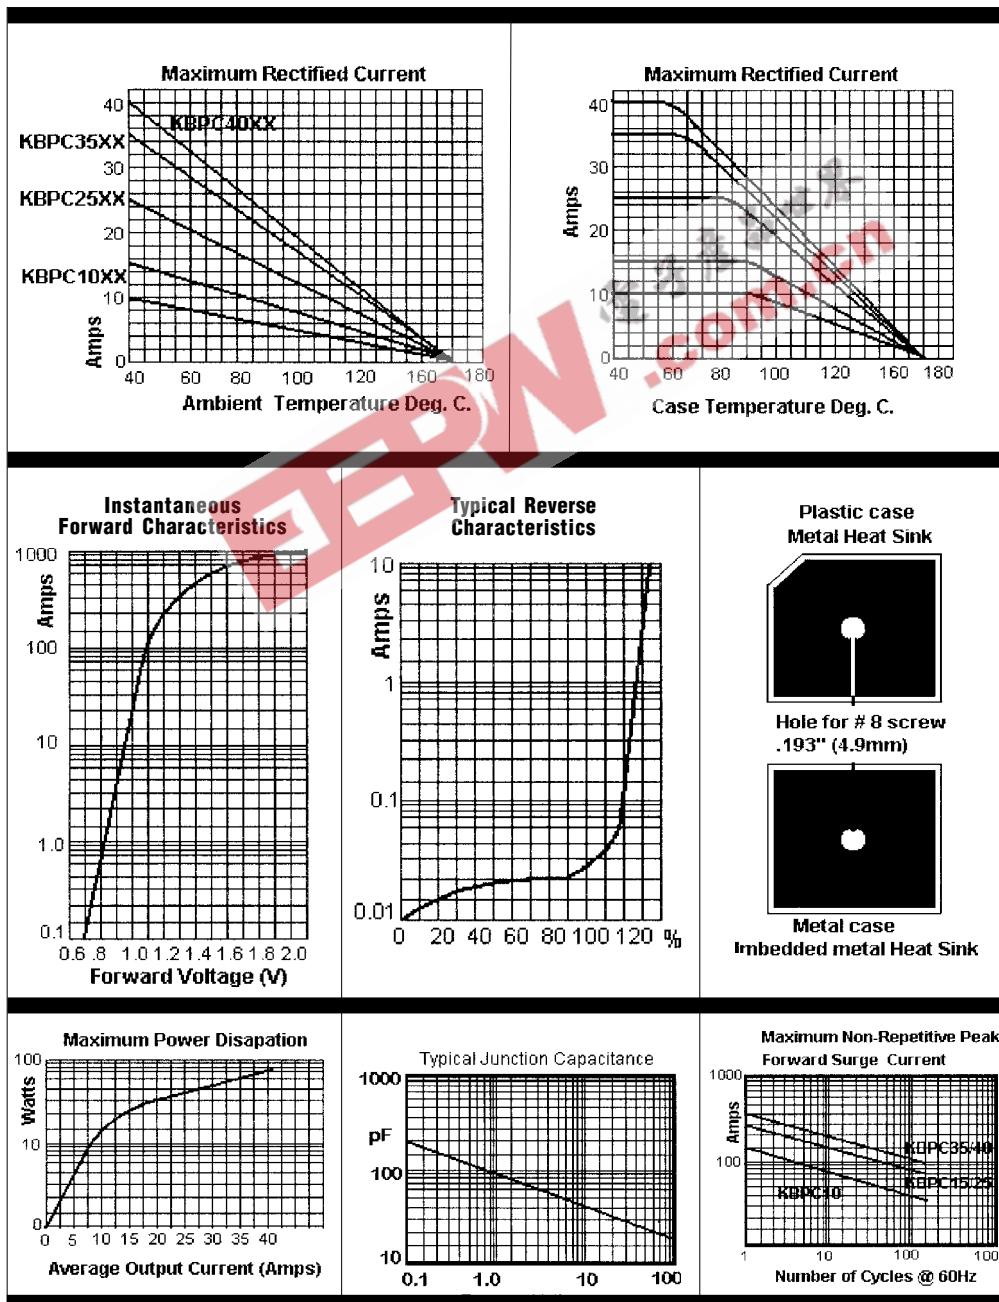

Mechanical Dimensions

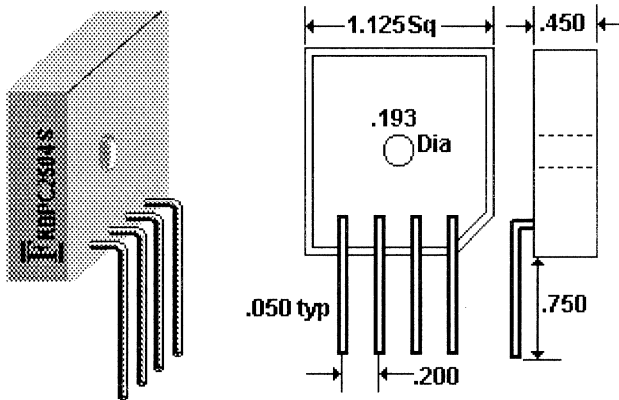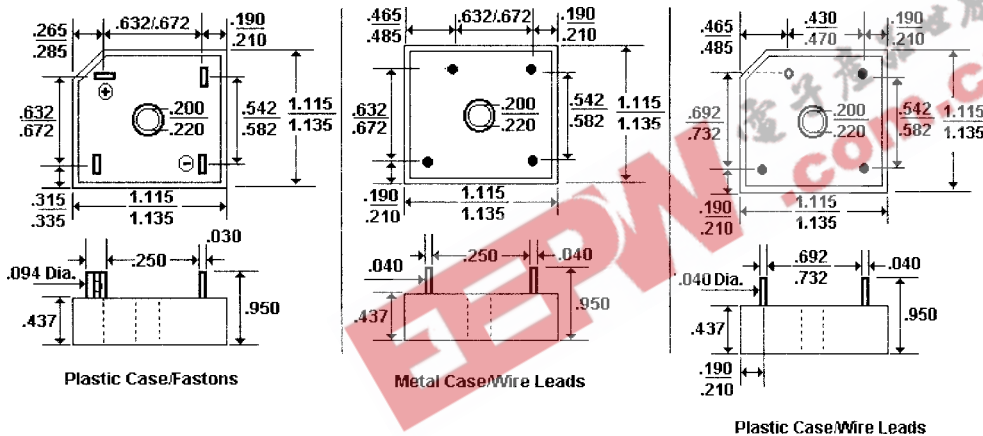

Ratings at 25 Deg. C ambient temperature unless otherwise specified.

Single Phase Half Wave, 60 HZ Resistive or Inductive Load.

For Capacitive Load, Derate Current by 20%.


- NOTES:**
1. Corrosion-Resistant Terminals Designed for .250" Female Quick Connect Wrap Around or Solder.
 2. A Thin Film of Silicone Thermal Compound is Recommended Between Bridge and Mounting Surface for Improved Thermal Conduction.
 3. These FCI Bridges Are Also Available in Fast Recovery, In Positive and Negative Center Tap and in Double Configurations. Consult with FCI for Your Special Requirements.



Data Sheet

10 to 40 Amp SINGLE PHASE SILICON BRIDGE

KBPC10XX . . . 40XX Series

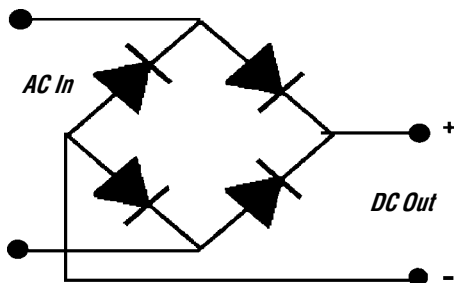

- Case - Metal or Molded Plastic
- Terminals - Plated .25" Faston or Plated Copper Wire Leads .040" Diameter
- Weight - 0.706 Ounces, 20 Grams
- Mounting Position - Any with Bolt Down with Silicone Thermal Compound Between Bridge and Mounting Surface for Optimum Heat Transfer
- Mounting Torque - 20 Inch Pound Max

Ordering Information

FCI'S KBPC Series of Bridges Can Be Ordered with Options on Terminals and Case Materials.

How To Specify Case Material and Terminal Options:

- For Metal Case, Order Suffix (1) "M"
- For Plastic Case, Order Suffix (1) "P"
- For Faston Terminals, Order Suffix (2) "F"
- For Wire Lead Terminals, Order Suffix (2) "W"
- For a UL Recognized Device, Order Suffix (3) "U"

KBPC Series Examples

To Order a 25 Amp, 400 Volt Bridge with Faston Leads and a Plastic Case:

Specify - **KBPC2504PF** . . . Where "P" = Plastic and "F" = Faston Terminals

To Order a 35 Amp, 800 Volt Bridge with Wire Leads and a Metal Case:

Specify - **KBPC3508MW** . . . Where "M" = Metal and "W" = Wire Leads (Terminals)

To Order a 15 Amp, 200 Volt, UL Recognized Bridge with Wire Leads and a Plastic Case:

Specify - **KBPC1502PWU** . . . Where "P" = Plastic and "W" = Wire Leads (Terminals) and "U" = UL Recognized

NOTE: Fast Recovery Bridges (Diodes) Are Available; Please Contact FCI Components.

KBPC - "S" Series Examples

To Order Bridges with the "In-Line" Pin Configuration, Select the Current and Voltage Desired and Add "S" as the Suffix, as shown in the following example.

To Order a 35 Amp, 800 Volt Bridge with In-Line Wire Leads:

Specify - **KBPC3508S** . . . Where "S" = In-Line Wire Lead Terminals