

Maximum RMS Bridge Input

Maximum Average Forward Rectified Output Current @

Peak Forward Surge Current
8.3ms single half sine-wave
super imposed on rated load

Maximum Forward Voltage D
at 7.5/12.5/17.5/25.0A Peak


Maximum Reverse Current at
DC Blocking Voltage per elemen

Operating Temperature Range

Storage Temperature Range

NOTES: 1. Also available on

INSTAN-

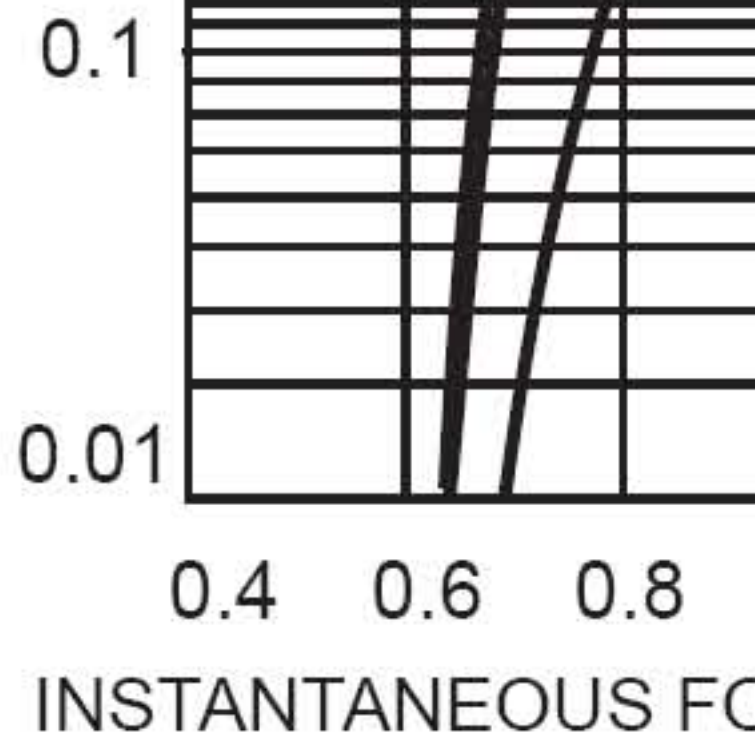

EEPW 电子产品世界
.com.cn