


# KBPC 5000F ... KBPC 5012F

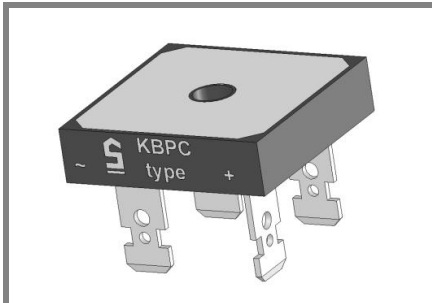

Square bridge

| Type        | Alternating input voltage<br>$V_{RMS}$<br>V | Repetitive peak reverse voltage<br>$V_{RRM}$<br>V |
|-------------|---|---|
| KBPC 5000 F | 35  | 50  |
| KBPC 5001 F | 70  | 100   |
| KBPC 5002 F | 140   | 200   |
| KBPC 5004 F | 280   | 400   |
| KBPC 5006 F | 420   | 600   |
| KBPC 5008 F | 560   | 800   |
| KBPC 5010 F | 700   | 1000  |
| KBPC 5012 F | 800   | 1200  |

## Silicon-Bridge Rectifiers

### KBPC 5000F ... KBPC 5012F

Forward Current: 50 A

Reverse Voltage: 50 to 1200 V

Publish Data

### Features

- max. solder temperature 260°C, max. 5s
- UL recognized, file no. E63532
- Standard packaging: bulk
- $V_{ISO} > 2500$  V

### Mechanical Data


- Plastic case with alu-bottom 28,6 \* 28,6 \* 7,3 [mm]
- Weight approx. 18 g
- Terminals: plated terminals solderable per IEC 68-2-20
- Mounting position: any
- Admissible torque for mounting (M 5): 2 (± 10 %) N
- F - faston only



### Absolute Maximum Ratings $T_c = 25^\circ\text{C}$ unless otherwise specified

| Symbol    | Conditions   | Values         | Units            |
|-----------|--|----------------|------------------|
| $I_{FRM}$ | Repetitive peak forward current; $f > 15$ Hz <sup>1)</sup>                     | 90             | A                |
| $I^2t$    | Rating for fusing, $t < 10$ ms   | 800            | A <sup>2</sup> s |
| $I_{FSM}$ | Peak forward surge current, 50 Hz half sine-wave<br>$T_A = 25^\circ\text{C}$   | 450            | A                |
| $I_{FAV}$ | Max. averaged fwd. current, R-load, $T_A = 50^\circ\text{C}$ <sup>1)</sup>     | not applicable | A                |
| $I_{FAV}$ | Max. averaged fwd. current, C-load, $T_A = 50^\circ\text{C}$ <sup>1)</sup>     | not applicable | A                |
| $I_{FAV}$ | Max. current with cooling fin, R-load, $T_c = 100^\circ\text{C}$ <sup>2)</sup> | 50             | A                |
| $I_{FAV}$ | Max. current with cooling fin, C-load, $T_c = 100^\circ\text{C}$ <sup>2)</sup> | 46             | A                |
| $R_{thA}$ | Thermal resistance junction to ambient <sup>1)</sup>                           |                | K/W              |
| $R_{thC}$ | Thermal resistance junction to case <sup>1)</sup>                              | 1,2            | K/W              |
| $T_j$     | Operating junction temperature   | - 50 ... + 150 | °C               |
| $T_s$     | Storage temperature  | - 50 ... + 150 | °C               |

### Characteristics $T_c = 25^\circ\text{C}$ unless otherwise specified

| Symbol | Conditions   | Values | Units         |
|--------|--|--------|---------------|
| $V_F$  | Maximum forward. voltage,<br>$T_j = 25^\circ\text{C}$ ; $I_F = 25$ A   | 1,1    | V             |
| $I_R$  | Maximum Leakage current,<br>$T_j = 25^\circ\text{C}$ ; $V_R = V_{RRM}$ | 25     | $\mu\text{A}$ |
| $C_j$  | Typical junction capacitance per leg at V, MHz                         |        | pF            |

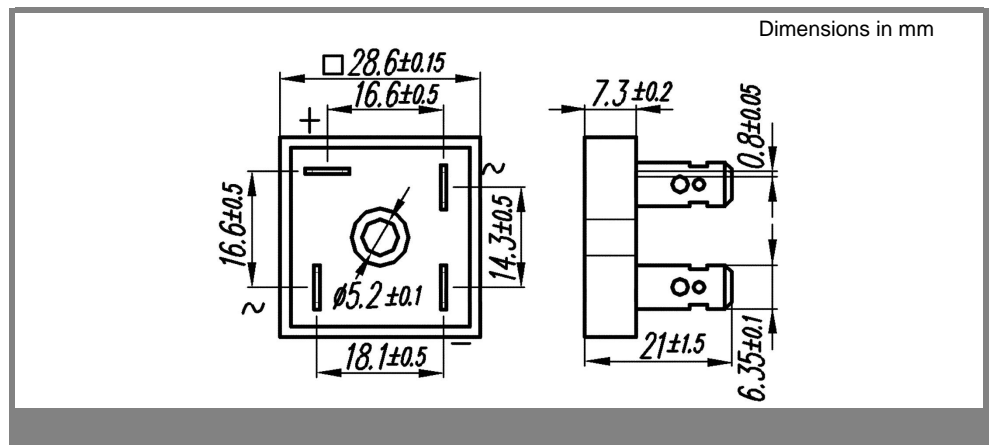

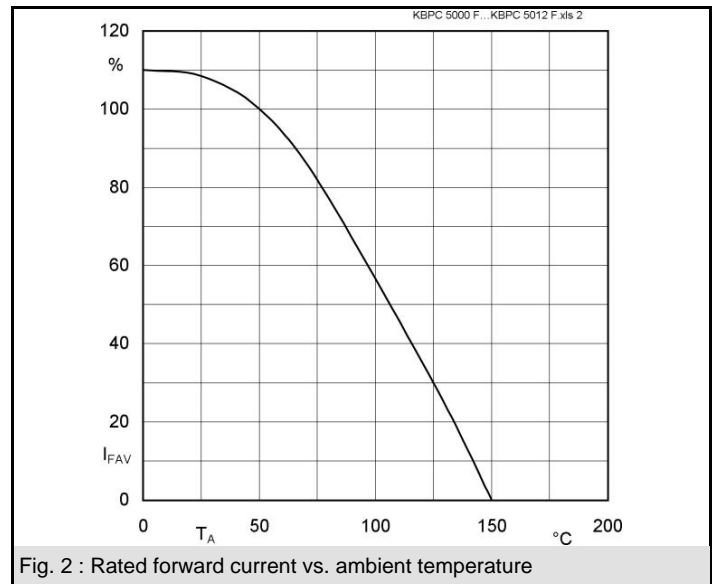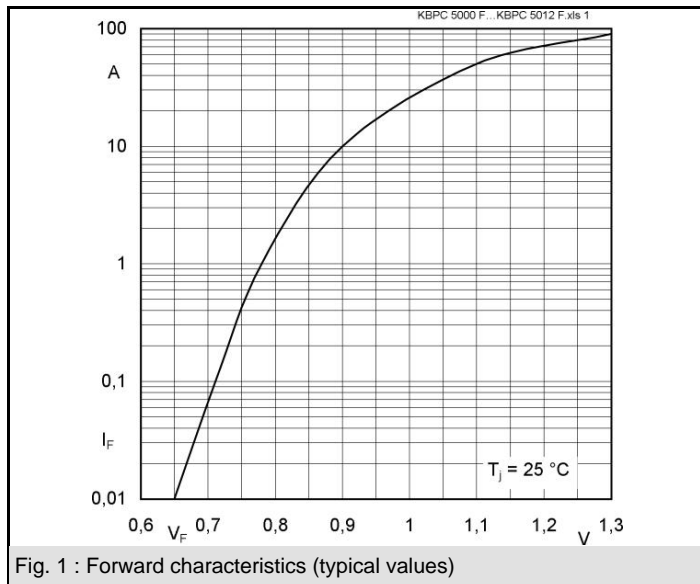

EEPW 电子产品世界 .com.cn