
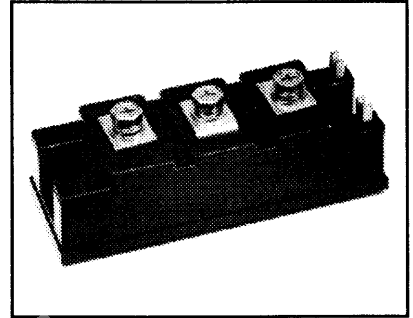


### Dual Darlington Transistor Module 50 Amperes/1000 Volts

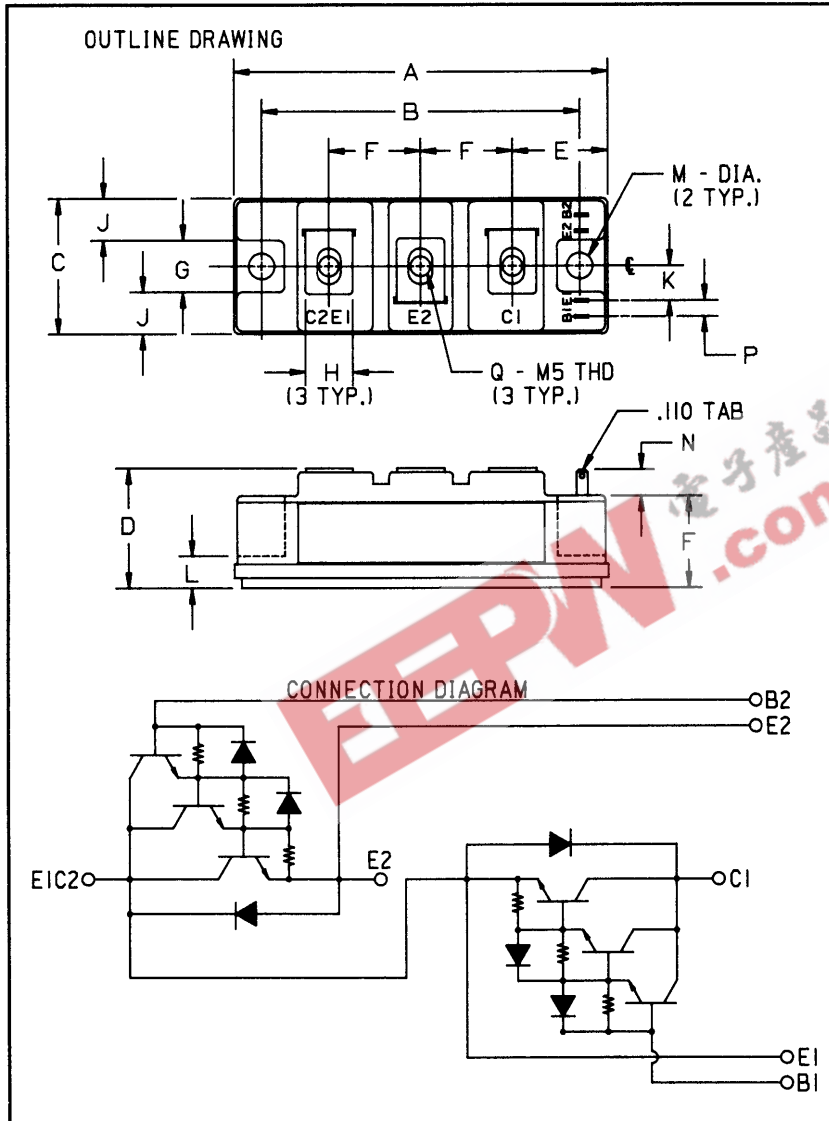

#### Description:

The Powerex Dual Darlington Transistor Modules are high power devices designed for use in switching applications. The modules are isolated, consisting of two Darlington Transistors with each transistor having a reverse parallel connected high-speed diode.

#### Features:

- Isolated Mounting
- Planar Chips
- Discrete Fast Recovery Feedback Diode
- High Gain ( $h_{FE}$ )
- Quick Connect Base-Emitter Signal Terminals
- Base-Emitter Speed-up Diodes

#### Applications:

- AC Motor Control
- DC Motor Control
- Switching Power Supplies
- Inverters

#### Ordering Information:

Example: Select the complete eight digit module part number you desire from the table - i.e. KD221K05 is a 1000 Volt, 50 Ampere Dual Darlington Module.

Outline Drawing

| Dimensions | Inches        | Millimeters |
|------------|---------------|-------------|
| A          | 3.701 Max.    | 94 Max.     |
| B          | 3.150 ± 0.010 | 80 ± 0.25   |
| C          | 1.339 Max.    | 34 Max.     |
| D          | 1.181 Max.    | 30 Max.     |
| E          | 0.945         | 24          |
| F          | 0.906         | 23          |
| G          | 0.512         | 13          |
| H          | 0.472         | 12          |

| Dimensions | Inches     | Millimeters |
|------------|------------|-------------|
| J          | 0.413      | 10.5        |
| K          | 0.344      | 8.75        |
| L          | 0.315      | 8           |
| M          | 0.256 Dia. | 6.5 Dia.    |
| N          | 0.256 Min. | 6.5 Min.    |
| P          | 0.157      | 4           |
| Q          | M5 Metric  | M5          |

| Type | $V_{CE0(sus)}$<br>Volts (X 1000) | Current Rating<br>Amperes (X 10) |
|------|----------------------------------|----------------------------------|
| KD22 | 1K                               | 05                               |



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272

**KD221K05**  
Dual Darlingtong Transistor Module  
50 Amperes/1000 Volts

**Absolute Maximum Ratings,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

| Ratings                                                     | Symbol         | KD221K05   | Units            |
|-------------------------------------------------------------|----------------|------------|------------------|
| Junction Temperature                                        | $T_j$          | -40 to 150 | $^\circ\text{C}$ |
| Storage Temperature                                         | $T_{stg}$      | -40 to 125 | $^\circ\text{C}$ |
| Collector-Emitter Sustaining Voltage, $V_{BE} = -2\text{V}$ | $V_{CEV(sus)}$ | 1000       | Volts            |
| Collector-Base Voltage                                      | $V_{CBO}$      | 1000       | Volts            |
| Emitter-Base Voltage                                        | $V_{EBO}$      | 7          | Volts            |
| Collector-Emitter Voltage, $V_{BE} = -2\text{V}$            | $V_{CEV}$      | 1000       | Volts            |
| Continuous Collector Current                                | $I_C$          | 50         | Amperes          |
| Diode Forward Current                                       | $I_{FM}$       | 50         | Amperes          |
| Continuous Base Current                                     | $I_B$          | 3          | Amperes          |
| Diode Surge Current                                         | $I_{FSM}$      | 500        | Amperes          |
| Power Dissipation (Each Transistor)                         | $P_t$          | 400        | Watts            |
| Max. Mounting Torque M5 Terminal Screws                     | -              | 17         | in.-lb.          |
| Max. Mounting Torque M6 Mounting Screws                     | -              | 26         | in.-lb.          |
| Module Weight (Typical)                                     | -              | 210        | Grams            |
| V Isolation                                                 | $V_{RMS}$      | 2500       | Volts            |

**Electrical Characteristics,  $T_j = 25^\circ\text{C}$  unless otherwise specified**










| Characteristics                      | Symbol        | Test Conditions                                                       | Min. | Typ. | Max. | Units         |
|--------------------------------------|---------------|-----------------------------------------------------------------------|------|------|------|---------------|
| Collector Cutoff Current             | $I_{CEV}$     | $V_{CE} = 1000\text{V}, V_{BE} = -2\text{V}$                          | -    | -    | 1    | mA            |
| Emitter Cutoff Current               | $I_{EBO}$     | $V_{CE} = 1000\text{V}, V_{BE} = -2\text{V}, T_C = 125^\circ\text{C}$ | -    | -    | 10   | mA            |
| DC Current Gain                      | $h_{FE}$      | $V_{EB} = 7\text{V}$                                                  | -    | -    | 200  | mA            |
| Diode Forward Voltage                | $V_{FM}$      | $I_C = 50\text{A}, V_{CE} = 5\text{V}$                                | 100  | -    | -    | -             |
| Collector-Emitter Saturation Voltage | $V_{CE(sat)}$ | $I_{FM} = 50\text{A}$                                                 | -    | -    | 1.8  | Volts         |
| Base-Emitter Saturation Voltage      | $V_{BE(sat)}$ | $I_C = 50\text{A}, I_B = 1\text{A}$                                   | -    | -    | 2.5  | Volts         |
| Resistive Turn-on                    | $t_{on}$      | $I_C = 50\text{A}, I_B = 1\text{A}$                                   | -    | -    | 3.5  | Volts         |
| Load Storage Time                    | $t_s$         | $V_{CC} = 600\text{V}$                                                | -    | -    | 2.5  | $\mu\text{s}$ |
| Switch Times                         | $t_f$         | $I_C = 50\text{A}$                                                    | -    | -    | 15   | $\mu\text{s}$ |
|                                      |               | $I_{B1} = 1\text{A}, I_{B2} = -1\text{A}$                             | -    | -    | 3.0  | $\mu\text{s}$ |

**Thermal and Mechanical Characteristics,  $T_j = 25^\circ\text{C}$  unless otherwise specified**



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272

**KD221K05**  
**Dual Darlington Transistor Module**  
**50 Amperes/1000 Volts**

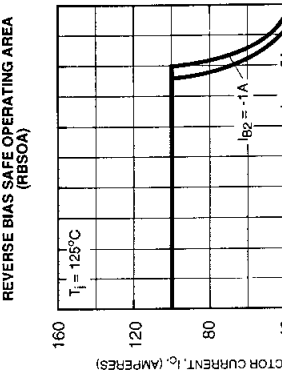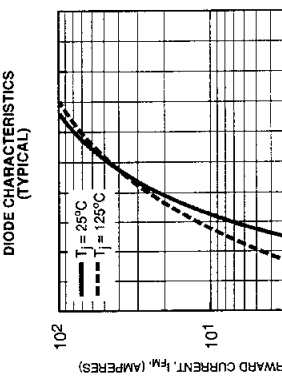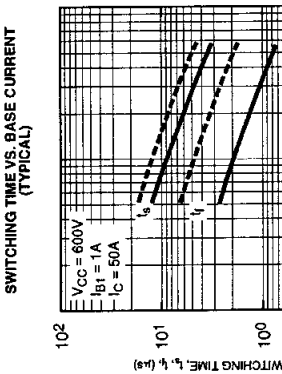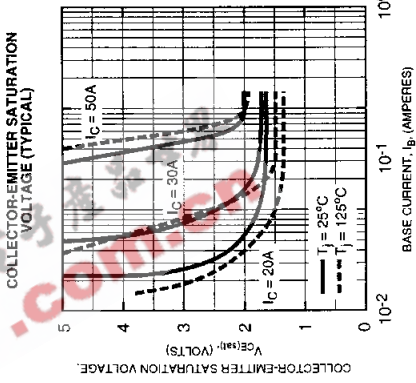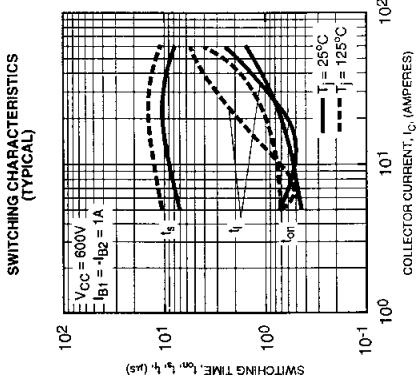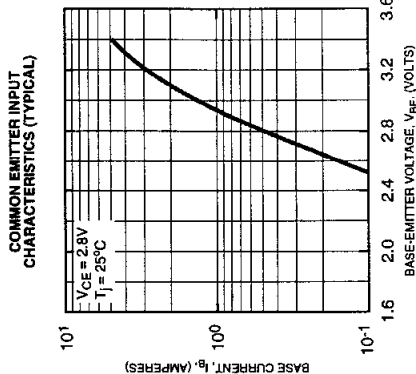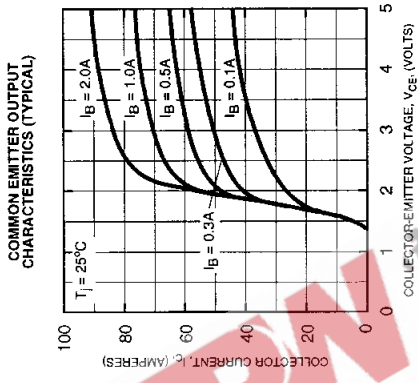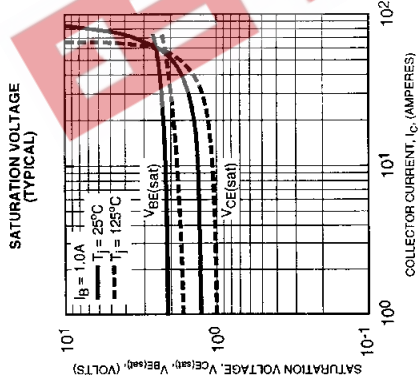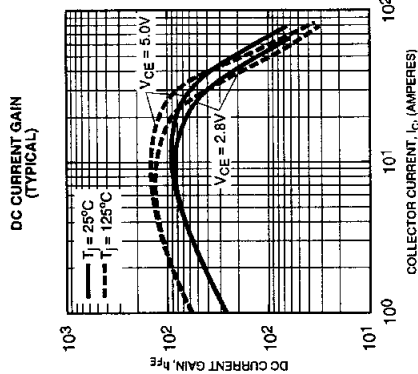



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (412) 925-7272

**KD221K05**  
**Dual Darlington Transistor Module**  
 50 Amperes/1000 Volts

