# **Ceramic Monoblock Duplex Filter**



# Model KFF6636A Technical Data

# Features:

- Small Size
- High Performance
- SMD

# **Description and Applications:**

This monoblock Duplexer filter is primarily designed for Cellular Band applications at 824-894 MHz.



### **Electrical Specifications**

Antenna to TX Response	Frequency	Specifications @ 25° C
Insertion Loss	824 MHz to 849 MHz	2.4 dB max.
Return Loss		13.0 dB min.
Rejection @ RX Band	869 MHz to 894 MHz	43.0 dB min.
Antenna to RX Response	Frequency	Specifications @ 25° C
Insertion Loss	869 MHz to 894 MHz	3.3 dB max.
Return Loss		13.0 dB min.
Rejection @ TX Band	824 MHz to 849 MHz	58.0 dB min.
TX to RX Response	Frequency	Specifications @ 25° C
Rejection @ RX Band	869 MHz to 894 MHz	44.0 dB min.
Rejection @ TX Band	824 MHz to 849 MHz	60.0 dB min.
Power Rating		3 W
Impedance		50 Ω

NOTE: Supplier shall test each filter to the critical electrical specifications listed above or better. Any subsequent audits may deviate due to measurement repeatability among different test systems. Such deviations shall not exceed the following limits:


SpecificationTypical AllowanceInsertion Loss0.1 dB

Return Loss 1.0 dB Stopbands 1.0 dB


Rev. 1



#### **Typical Response Curve**

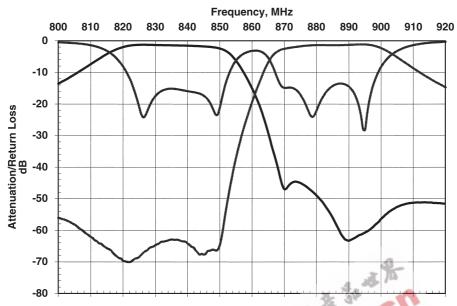


#### **Mechanical Dimensions**

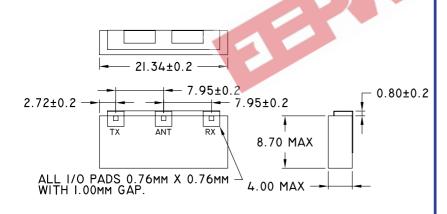


All dimensions in mm

# **Part Marking**


Y = LAST DIGIT OF YEAR WW = SEQUENTIAL WEEK NUMBER



# **PC Board Layout**




DIMENSIONS ARE IN MM, TOLERANCES=±.13



# **Packaging**

Reel Quantity: 500 pcs. max. Reel Weight: 5.4 lbs. max.

PACK DIRECTION



#### **Contact Information:**

CTS WIRELESS COMPONENTS, INC. / 171 Covington Drive / Bloomingdale, IL 60108 PHONE: (800) 757-6686 / www.ctscorp.com

Document Control #6287078Y01 Rev 1 Date of Origin 04/09/01 Date of Revision 04/09/01