



KBPC15, 25, 35 SERIES

**HIGH CURRENT 15, 25, 35 AMPS SINGLE PHASE
GLASS PASSIVATED BRIDGE RECTIFIERS**




VOLTAGE RANGE
50 to 1000 Volts
CURRENT
15.0/25.0/35.0 Amperes

FEATURES

- * Metal case with an electrically isolated mylar
- * Rating to 1,000V PRV
- * High efficiency
- * Mounting: thru hole for # 10 screw
- * High temperature soldering guaranteed: 260°C/10 seconds at 5 lbs., (2.3 kg) tension
- * Terminals solderables per MIL – STD – 202. method 208
- * Isolated voltage from case to lead over 2000 volts

KBPC-W

KBPC

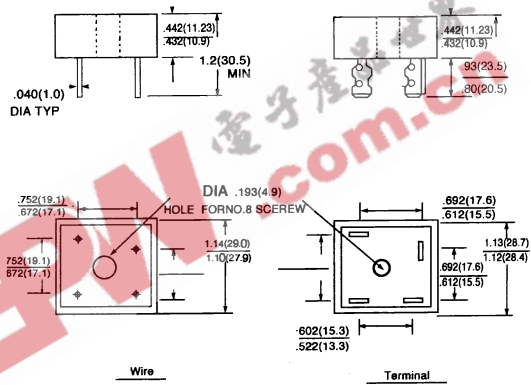

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
60 Hz, resistive or inductive load. For capacitive load, derate current by 20%

TYPE NUMBER	SYMBOLS	-00G	-01G	-02G	-04G	-06G	-08G	-10G	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum D. C Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Output Current @ $T_C = 55^\circ\text{C}$ (See Fig. 1)	$I_{F(AV)}$				15.0	25.0	35.0		A
Peak Forward Surge Current single sine-wave superimposed on rated load (JEDEC method)	I_{FSM}				200	300	400		A
Maximum Instantaneous Forward Voltage Drop per Element at Specified Current	V_F	7.5A	12.5A	17.5A	1.10				V
Maximum Reverse DC Current at Rated D. C Blocking Voltage per Element	I_R				10.0				μA
Typical Thermal Resistance <1>	$R_{\theta JC}$				2.0				$^\circ\text{C}/\text{W}$
Operating and Storage Temperature Range	T_J, T_{STG}				-50 to +150				$^\circ\text{C}$

- Notes: 1. Thermal Resistance from Junction to Case Per leg.
2. Bolt down on heatsink with silicone thermal compound between bridge and mounting surface for maximum heat transfer with # 10 screw
3. Suffix "W" – Wire Lead Structure.



RATINGS AND CHARACTERISTIC CURVES (KBPC1500G KBPC1510G
KMPC2500G THRU KBPC2510G)
KBPC3500G KBPC3510G

FIG. 1 - TYPICAL FORWARD OUTPUT CURRENT DERATING CURVE

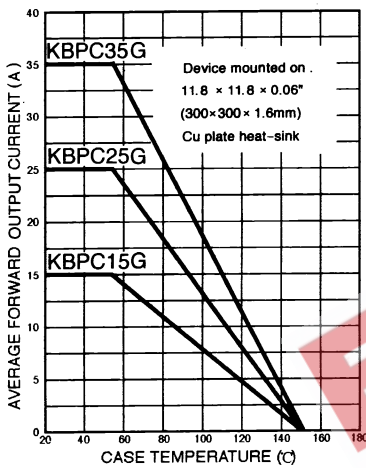


FIG. 2 - MAXIMUM NON-REPETITIVE SURGE CURRENT - PER ELEMENT

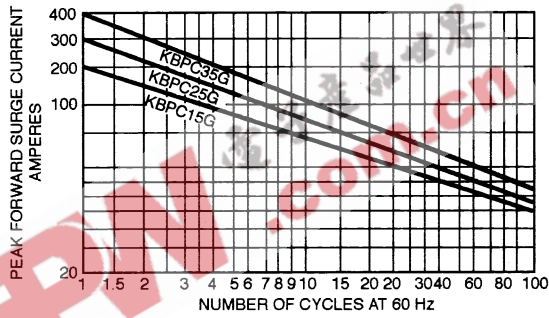


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS PER ELEMENT

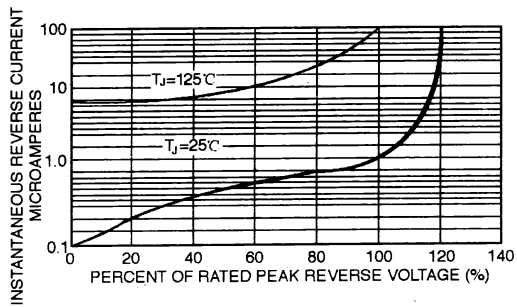


FIG. 4 - TYPICAL FORWARD CHARACTERISTICS - PER ELEMENT

