

# M1325 Surface Mount Crystal

## 3.2 x 5 x 0.8 mm



### Features:

- Ultra-Miniature Size
- Tape & Reel
- Leadless Ceramic Package - Seam Sealed




### Applications:

- Handheld Electronic Devices
- PDA, GPS, MP3
- Portable Instruments

### Ordering Information

Product Series	M1325	1	J	M	XX	00.0000
Operating Temperature	2: -40°C to +85°C      6: -20°C to +70°C					
Tolerance @ +25°C	D: ±10 ppm      J: ±30 ppm (std) E: ±15 ppm      M: ±50 ppm (std) G: ±20 ppm      P: ±100 ppm H: ±25 ppm					
Stability	D: ±10 ppm      J: ±30 ppm E: ±15 ppm      M: ±50 ppm (std) G: ±20 ppm      P: ±100 ppm H: ±25 ppm					
Load Capacitance	Blank: 18 pF (std) S: Series Resonant XX: Customer Specified 10 pF to 32 pF					
Frequency (customer specified)	MHz					

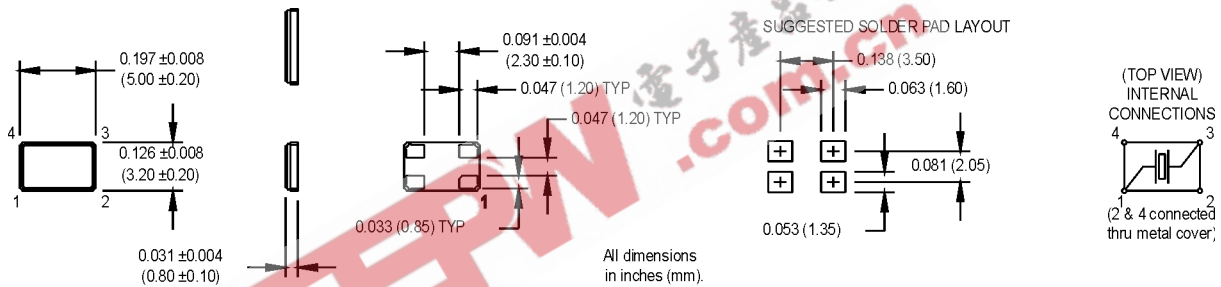

	Parameter	Symbol	Min.	Typ.	Max.	Units	Conditions
Electrical Specifications	Frequency Range	F	12		54	MHz	
	Frequency Tolerance	F/F	See Ordering Information			ppm	+25°C
	Frequency Stability	F/F	See Ordering Information			ppm	Over Operating Temperature
	Operating Temperature	T <sub>opr</sub>	See Ordering Information			°C	
	Storage Temperature	T <sub>stg</sub>	-55		+125	°C	
	Aging	F <sub>a</sub>			±5	ppm/yr	+25°C
	Load Capacitance	C <sub>L</sub>					See Ordering Information
	Shunt Capacitance	C <sub>0</sub>				7	pF
	ESR						
	Fundamental AT-Cut Frequencies						
		12.000000 to 19.999999 MHz			80	Ohms	All
		20.000000 to 29.999999 MHz			70	Ohms	All
	30.000000 to 54.000000 MHz			50	Ohms	All	
	Drive Level	D <sub>L</sub>	10		100	µW	
	Insulation Resistance	I <sub>R</sub>	500			Megohms	100 VDC
Environmental	Aging	Internal Specification					168 hrs. at +55°C
	Physical Dimensions	MIL-STD-883, Method 2016					
	Shock	MIL-STD-202, Method 213 Condition C					100 g
	Vibration	MIL-STD-202, Methods 201 & 204					10 g from 10-2000 Hz
	Thermal Cycle	MIL-STD-883, Method 1010, Condition B					-55°C to +125°C
	Gross Leak	MIL-STD-202, Method 112					30 sec. Immersion
	Fine Leak	MIL-STD-202, Method 112					1 x 10 <sup>-8</sup> atmcc/sec. min.
Resistance to Solvents	MIL-STD-883, Method 2015					Three 1 minute soaks	

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see [www.mtronpti.com](http://www.mtronpti.com) for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.

# MtronPTI Lead Free Solder Profile

