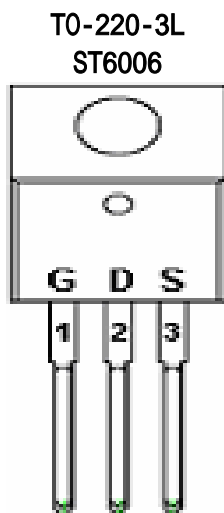



DESCRIPTION

The ST6006 is the N-Channel logic enhancement mode power field effect transistor are produced using high cell density, DMOS trench technology.

This ST6006 is designed to withstand high energy in the avalanche and commutation modes. Designed for low voltage, high speed switching applications in power supplies, converters and power motor controls, these devices are particularly well suited for bridge circuits where diode speed and commutating safe operating areas are critical and offer additional safety margin against unexpected voltage transients.

PIN CONFIGURATION

T0-263-2L
ST6006S

**APPLICATIONS**

- Power Supplies
- Converters
- Power Motor controls
- Bridge Circuit

FEATURE

- 20V/2.8A, $R_{DS(ON)} = 85\text{m-ohm}$
@ $V_{GS} = 4.5\text{V}$
- 20V/2.4A, $R_{DS(ON)} = 115\text{m-ohm}$
@ $V_{GS} = 2.5\text{V}$
- Super high density cell design for extremely low $R_{DS(ON)}$
- Exceptional on-resistance and maximum DC current capability
- SOT-23-3L package design

**STANSON TECHNOLOGY**

120 Bentley Square, Mountain View, Ca 94040 USA

TEL: (650) 9389294 FAX: (650) 9389295

60V/60A

ORDERING INFORMATION

Part Number	Package	Part Marking
ST6006T220TG	TO-220-3L	ST6006D
ST6006T220RG	TO-263-2L	ST6006

ABSOLUTE MAXIMUM RATINGS (Ta = 25 Unless otherwise noted)

Parameter	Symbol	Typical	Unit
Drain-Source Voltage	V _{DSS}	60	V
Gate-Source Voltage	V _{GSS}	+/-20	V
Continuous Drain Current (T _J =150)	I _D	60 39	A
Pulsed Drain Current	I _{DM}	120	A
Continuous Source Current (Diode Conduction)	I _S	60	A
Power Dissipation	P _D	120 3.7	W
Operation Junction Temperature	T _J	150	
Storage Temperature Range	T _{STG}	-55/150	
Thermal Resistance-Junction to Ambient	R _{JA}	40 62.5	/W

**STANSON TECHNOLOGY**

120 Bentley Square, Mountain View, Ca 94040 USA


TEL: (650) 9389294 FAX: (650) 9389295

60V/60A

ELECTRICAL CHARACTERISTICS ($T_a = 25$ Unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit	
Static							
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS}=0V, I_D=10\mu A$	60			V	
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=50\mu A$	1.0		3.0	V	
Gate Leakage Current	I_{GSS}	$V_{DS}=0V, V_{GS}=20V$			100	nA	
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=60V, V_{GS}=0V$			1	uA	
		$V_{DS}=20V, V_{GS}=0V$ $T_J=125$			50		
		$V_{DS}=60V, V_{GS}=0V$ $T_J=175$					
On-State Drain Current	$I_{D(on)}$	$V_{DS}=5V, V_{GS}=10V$	60			A	
Drain-source On-Resistance	$R_{DS(on)}$	$V_{GS}=10V, I_D=30A$		12	16	m	
		$V_{GS}=10V, I_D=30A$ $T_J=125$		24	30		
		$V_{GS}=10V, I_D=30A$ $T_J=175$		31	37		
		$V_{GS}=5V, I_D=30A$		14	19		
Forward Transconductance	g_{fs}	$V_{DS}=15V, I_D=30A$		49		S	
Diode Forward Voltage	V_{SD}	$I_F=60A, V_{GS}=0V$			1.6	V	
Dynamic							
Total Gate Charge	Q_g	$V_{DS}=30V, V_{GS}=10V$ $I_D=60A$		39	60	nC	
Gate-Source Charge	Q_{gs}			12			
Gate-Drain Charge	Q_{gd}			10			
Input Capacitance	C_{iss}	$V_{DS}=25V, V_{GS}=0V$ $F=1MHz$		2000		pF	
Output Capacitance	C_{oss}			400			
Reverse Transfer Capacitance	C_{rss}			115			
Turn-On Time	$t_{d(on)}$	$V_{DD}=10V, R_L=5.5$ $I_D=3.6A, V_{GEN}=4.5V$ $R_G=6$		12	25	nS	
	t_r			36	60		
Turn-Off Time	$t_{d(off)}$				34		60
	t_f				10		25

60V/60A

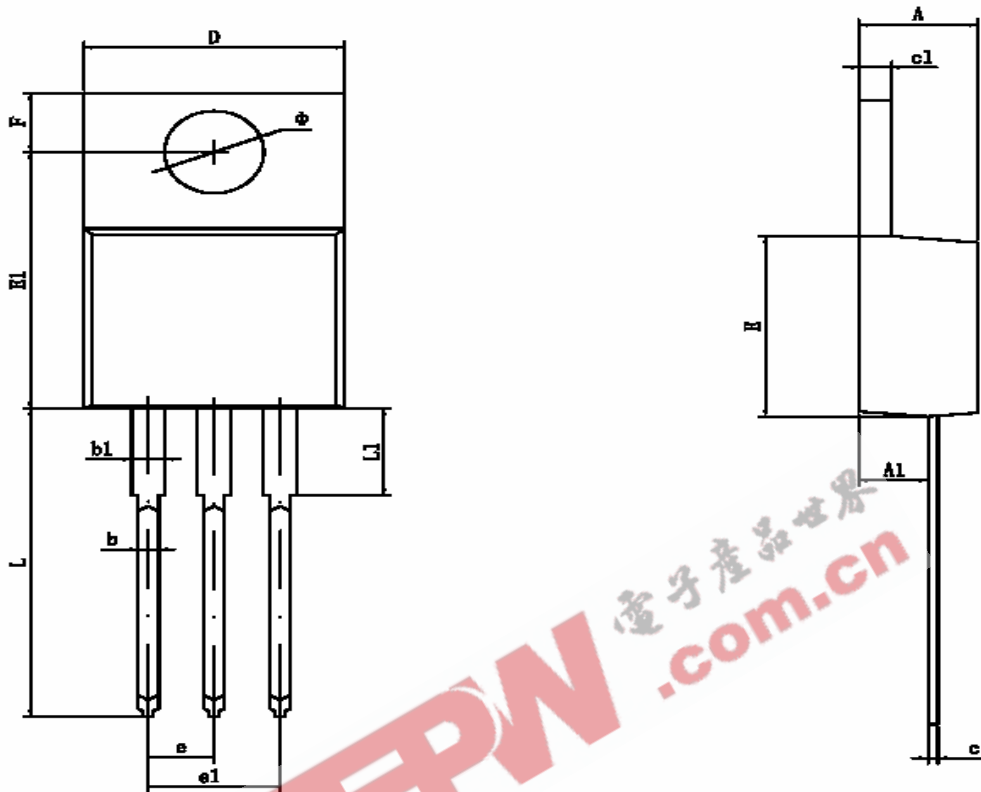TO-220-3L PACKAGE OUTLINE
ST6006


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	4.470	4.670	0.176	0.184
A1	2.520	2.820	0.099	0.111
b	0.710	0.910	0.028	0.036
b1	1.170	1.370	0.046	0.054
c	0.310	0.530	0.012	0.021
c1	1.170	1.370	0.046	0.054
D	10.010	10.310	0.394	0.406
E	8.500	8.900	0.335	0.350
E1	12.060	12.460	0.475	0.491
e	2.540TYP		0.100TYP	
e1	4.980	5.180	0.196	0.204
F	2.590	2.890	0.102	0.114
L	13.400	13.800	0.528	0.543
L1	3.560	3.960	0.140	0.156
Φ	3.790	3.890	0.149	0.153

**STANSON TECHNOLOGY**

120 Bentley Square, Mountain View, Ca 94040 USA

TEL: (650) 9389294 FAX: (650) 9389295

60V/60

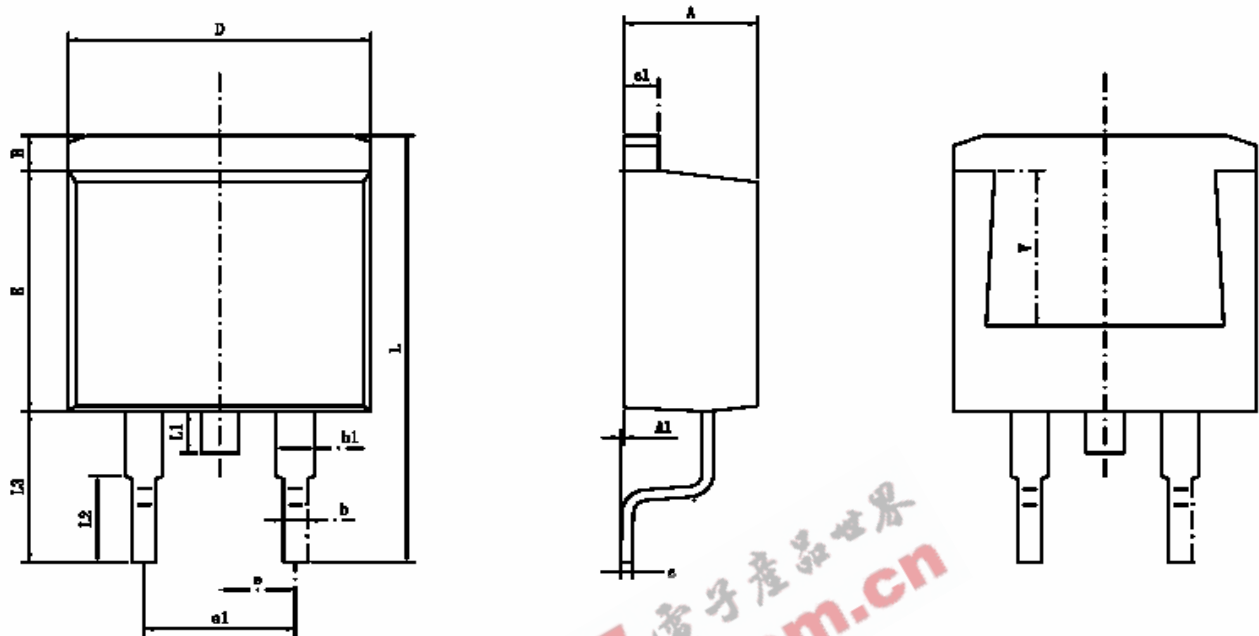TO-263-2L PACKAGE OUTLINE
ST6006S

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	4.470	4.670	0.176	0.184
A1	0.000	0.150	0.000	0.006
B	1.170	1.370	0.046	0.054
b	0.710	0.910	0.028	0.036
b1	1.170	1.370	0.046	0.054
c	0.310	0.530	0.012	0.021
c1	1.170	1.370	0.046	0.054
D	10.010	10.310	0.394	0.406
E	8.500	8.900	0.335	0.350
e	2.540TYP		0.100TYP	
e1	4.980	5.180	0.196	0.204
L	15.050	15.450	0.593	0.608
L1	1.300	1.700	0.051	0.067
L2	2.340	2.740	0.092	0.108
L3	5.080	5.480	0.200	0.216
V	5.600REF		0.220REF	

**STANSON TECHNOLOGY**

120 Bentley Square, Mountain View, Ca 94040 USA

TEL: (650) 9389294 FAX: (650) 9389295

TYPICAL CHARACTERISTICS

Figure 1. Maximum Effective Thermal Impedance, Junction-to-Case

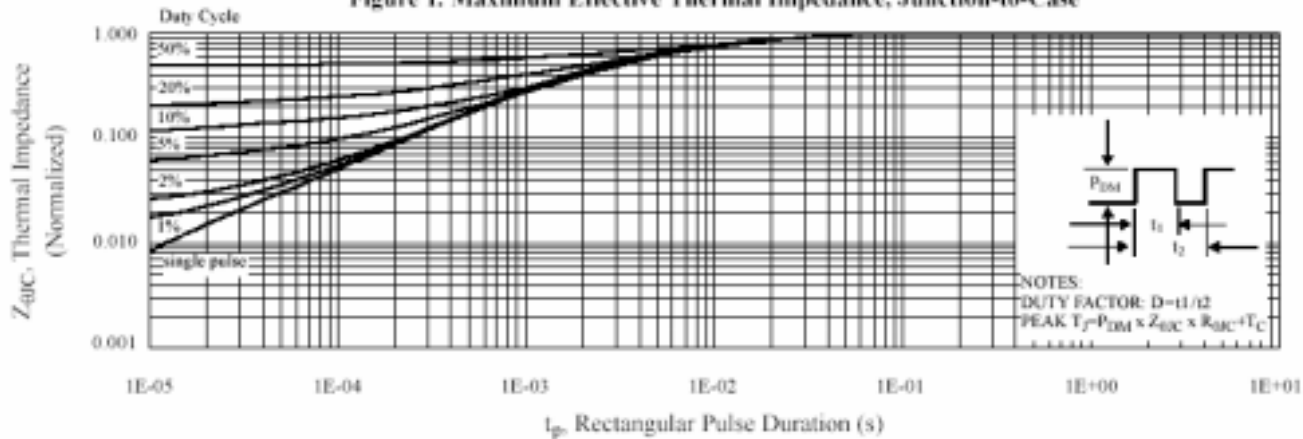


Figure 2. Maximum Power Dissipation vs Case Temperature

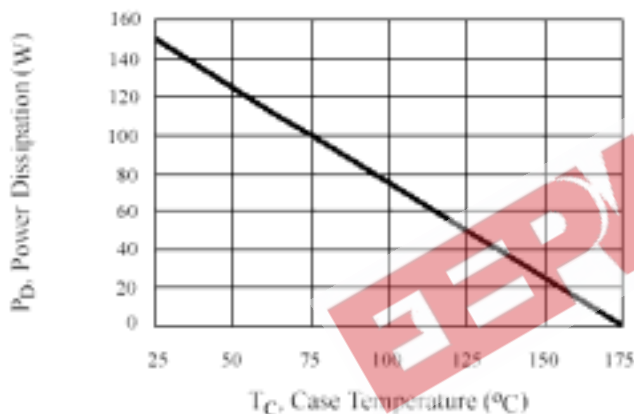


Figure 3. Maximum Continuous Drain Current vs Case Temperature

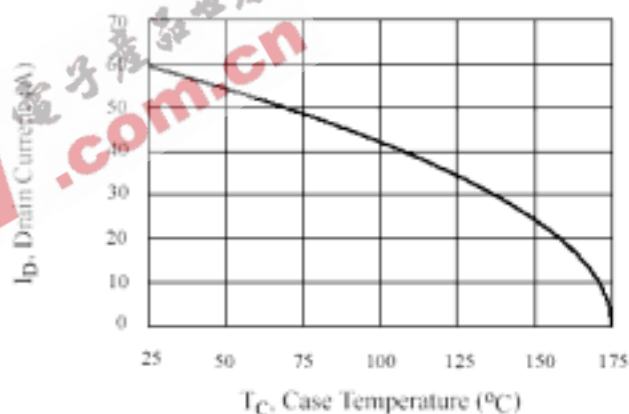


Figure 4. Typical Output Characteristics


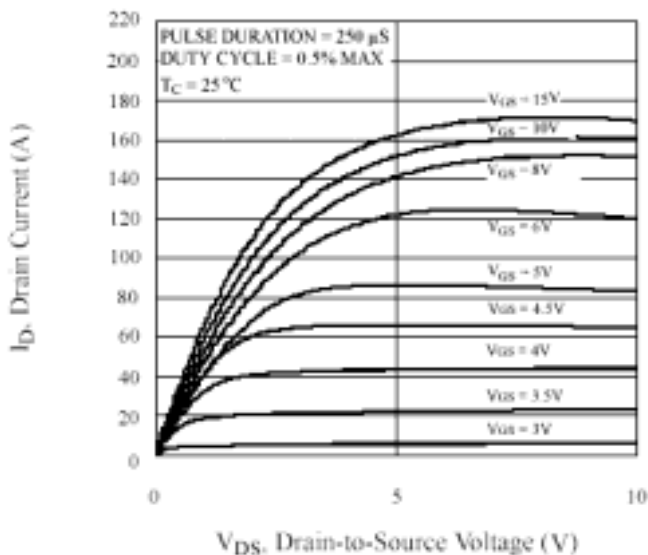


Figure 5. Typical Drain-to-Source ON Resistance vs Gate Voltage and Drain Current

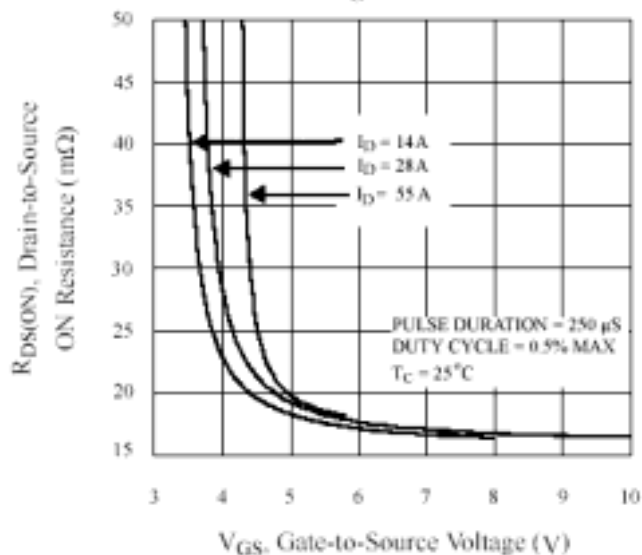

TYPICAL CHARACTERISTICS

Figure 6. Maximum Peak Current Capability

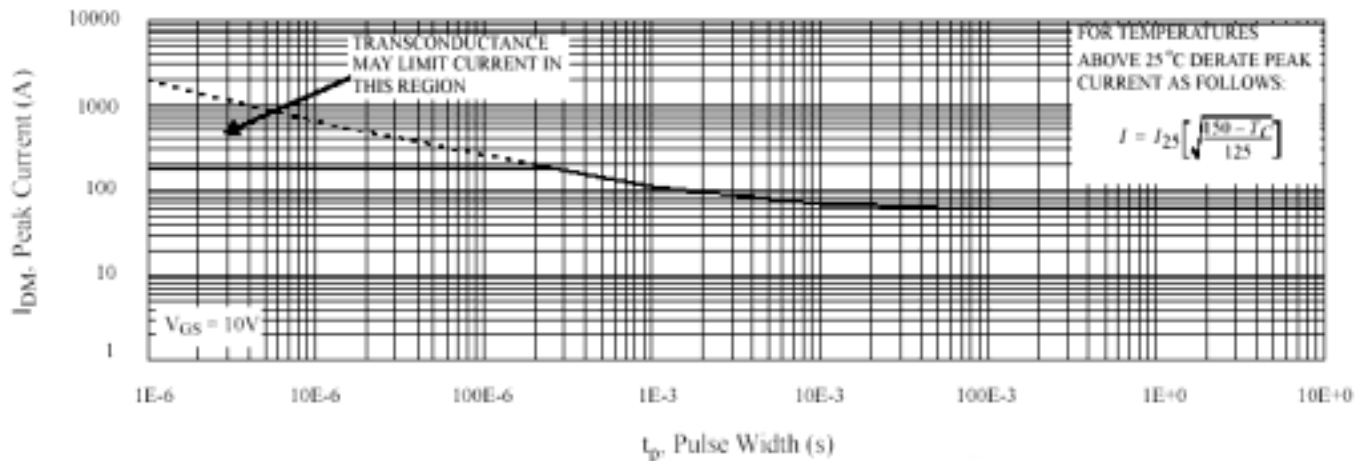


Figure 7. Typical Transfer Characteristics

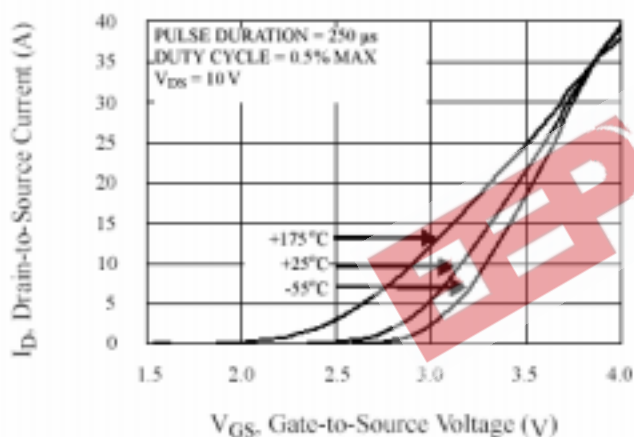


Figure 8. Unclamped Inductive Switching Capability

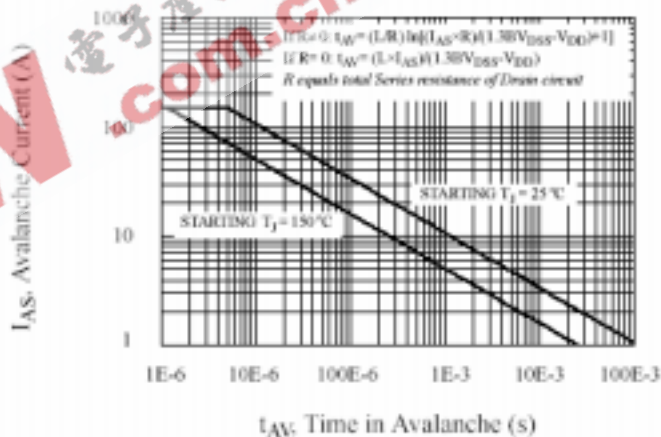


Figure 9. Typical Drain-to-Source ON Resistance vs Drain Current


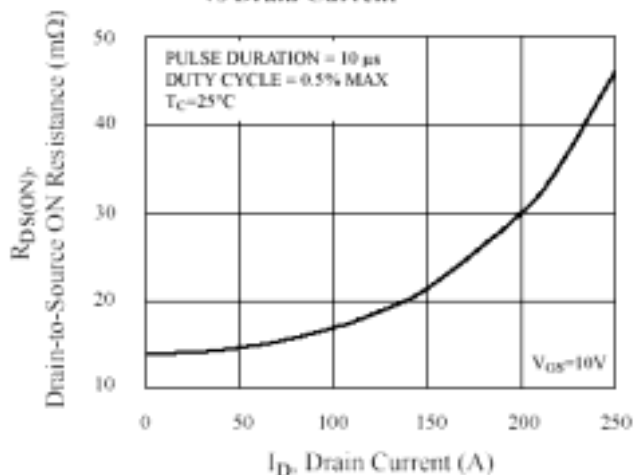


Figure 10. Typical Drain-to-Source ON Resistance vs Junction Temperature

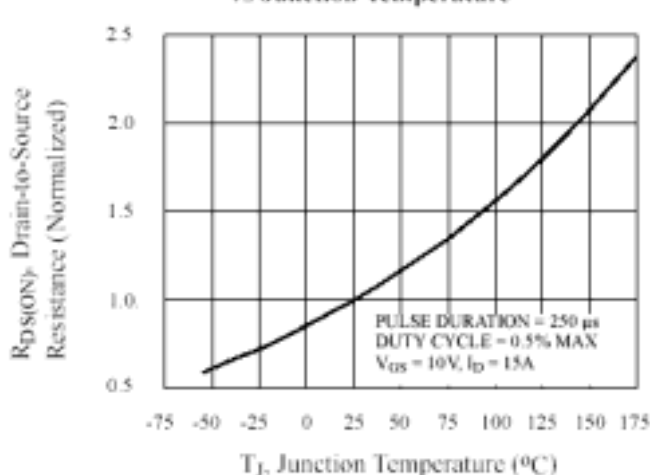

60V60A

TYPICAL CHARACTERISTICS

Figure 11. Typical Breakdown Voltage vs Junction Temperature

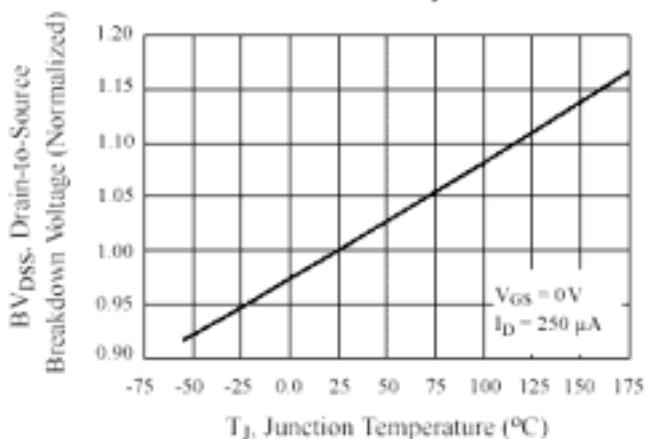


Figure 12. Typical Threshold Voltage vs Junction Temperature

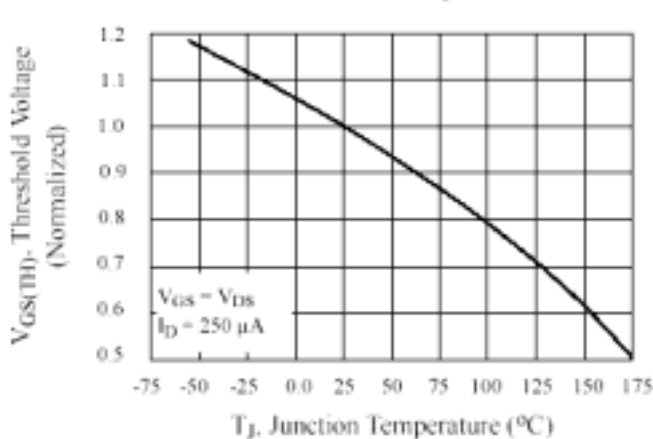


Figure 13. Maximum Forward Bias Safe Operating Area

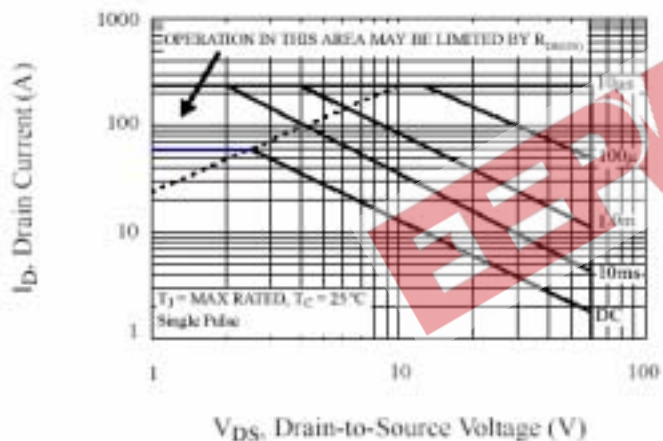


Figure 14. Typical Capacitance vs Drain-to-Source Voltage

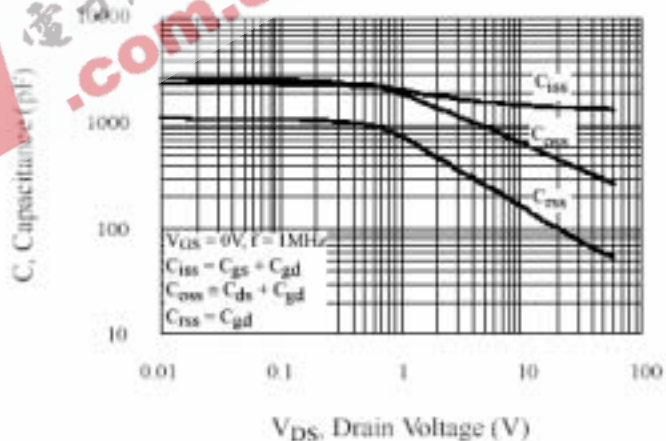


Figure 15. Typical Gate Charge vs Gate-to-Source Voltage

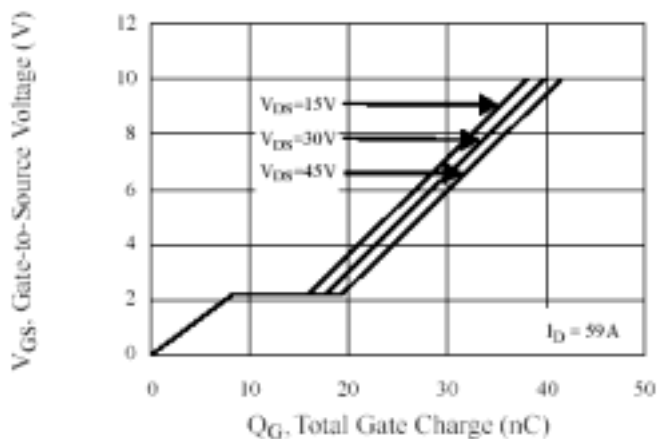


Figure 16. Typical Body Diode Transfer Characteristics

