

# Safety relay

## OA / OW 5669



- according to EN 50 205, IEC/EN 60 255, IEC 60 664-1
- with positively driven contacts
- wash proof model as option
- **double and reinforced insulataion between contact sets according to EN 50 178**
- low rated power consumption
- high mechanical service life
- compact size, small height
- Approvals: UL, CSA,  
TÜV approval: R 9012316

### Applications:

ZH1/457 press controls  
Switchgear for safety technology



OA / OW 5669

## Technical data

Relay type		OA 5669	
<b>1. 0 Relay coil</b>			
1. 1	Nominal voltage	DC V	5, 6, 12, 20, 24, 48, 60, 110
1. 2	Nominal consumption	W	0,7
<b>2. 0 Contacts</b>			
2. 1	Contact arrangement	1 NC / 1NO 2 changeover contacts, 1 No and 1 changeover contact	
2. 2	Contact material	AgCdO + 0,2 µm Au; AgNi 10 + 0,2 µm Au optionally + 5 µm Au	
2. 3	Rated insulation voltage	AC V	250
	Switching voltage min./max.	V	AC/DC 10 / DC 250, AC 400 (AC/DC 100 mV / 60 V) <sup>1)</sup>
2. 4	Limiting continuous current	A	2 x 5 (see operating voltage limit curve)
	Switching current min./max.	A	10mA <sup>3)</sup> / 8 (1 mA / 0,3 A) <sup>1)</sup>
2. 5	Switching power min./max.	VA	3 / 2 000 (1 mVA / 7 VA) <sup>1)</sup>
	Switching power min./max.	W	3 / 200 (1 mW / 7 W) <sup>1)</sup> (s. limit curve for arc-free operation)
2. 6	Switching capacity		
	to IEC/EN 60 947-5-1 AC 15	AC V/A	NC: 230 / 1      NO: 230 / 3
	DC 13	DC V/A	NC: 24 / 2      NO: 24 / 2
2. 7	Electrical life <sup>2)</sup>	at 1 s On, 1 s Off (s. contacts service life)	
	AC 230 V 6 A cos φ = 1	switching cycles	> 1 x 10 <sup>5</sup> AgNi 10      > 2 x 10 <sup>5</sup> AgCdO
2. 8	Switching frequency max.	switching cycles / s	10
2. 9	Response time / Release time	ms	≤ 15 / ≤ 12
2.10	Contact force NO / NC	cN	≥ 10 / ≥ 8
<b>3. 0 Other</b>			
3. 1	Mechanical life	switching cycles	≥ 50 x 10 <sup>6</sup>
3. 2	Temperature range	°C	- 40 ... + 60 mounted without distance (I <sub>th</sub> = 2 x 5 A)
3. 3	Degree of protection, housing	IP40 / IP67 IEC/EN 60 529 wash proof	
3. 4	Housing	Thermoplast GF, PA	
3. 5	Vibration resistance	10 ... 55 Hz; 0,35 mm amplitude; 5 g max. IEC/EN 60 068-2-6	
3. 6	Climate resistance	40 / 060 / 04 (climate category); A/B/D IEC/EN 60 068-1	
3. 8	Insulation according to IEC 60 664-1, EN 50 178	<b>double and reinforced insulation</b>	
	Rated insulation voltage	AC V	250
	Contamination level	2	
	Overvoltage category	III	

<sup>1)</sup> Values for AgNi 10-contacts + 5 µm Au

<sup>2)</sup> 10 A total current at t = 20°C and coil voltage UN

<sup>3)</sup> Typical values


## Technical data

3. 8 Test voltage	contact-coil (1 min)	AC kV eff.	≥ 4
	contact-contact (1 min)	AC kV eff.	≥ 4
Transient volt.	contact-coil (1,2 - 50 μs)	kV	≥ 6
Clearance and creepage distances as per IEC/EN 60 730, IEC/EN 60 335			
3. 9 Weight	contact-coil	mm	≥ 8
	contact-contact:	mm	≥ 5,5
		g	15


## Standard variants

U <sub>N</sub> DC V	Voltage range DC V	Resistance at 20°C Ω	Design version OA / OW		
			.16	.16	.12
5	4,0...8,0	36	461	991	980
6	4,8...9,6	50	462	992	981
12	9,6...19,2	210	463	993	982
20	16,0...32,0	580	468	998	987
24	19,2...38,4	820	464	994	983
48	38,4...76,8	3 200	465	995	984
60	48,0...96,0	5 200	466	996	985
110	88,0...176	18 000	467	997	986


## Ordering example

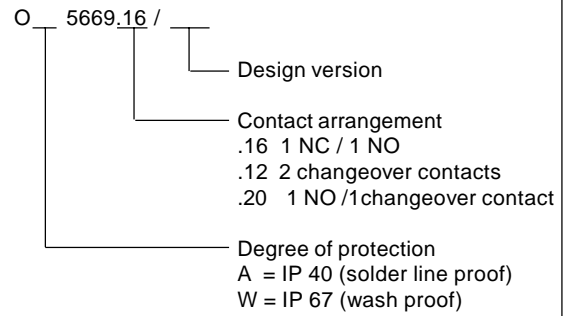


## Characteristics

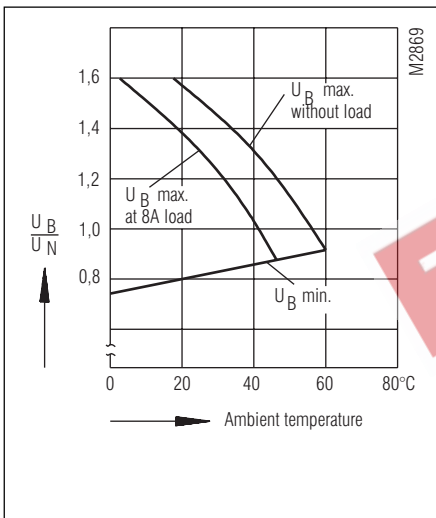

Operating voltage limit curve

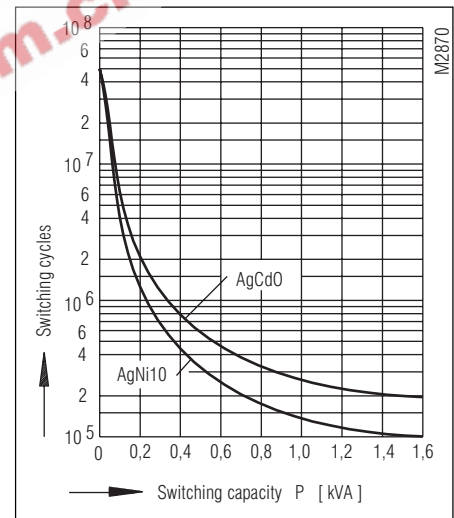


Contact service life (at  $t_u = 20^\circ\text{C}$ )

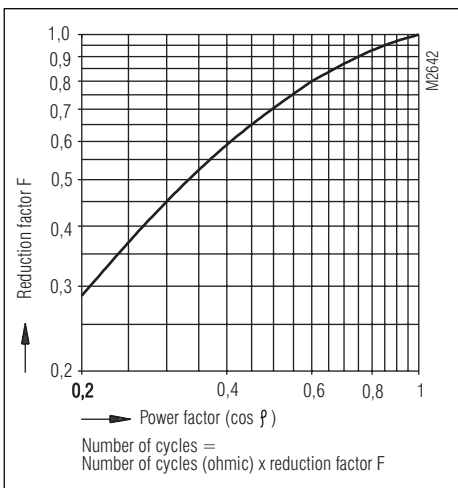


Reduction factor for inductive loads

Contact material  
AgNi

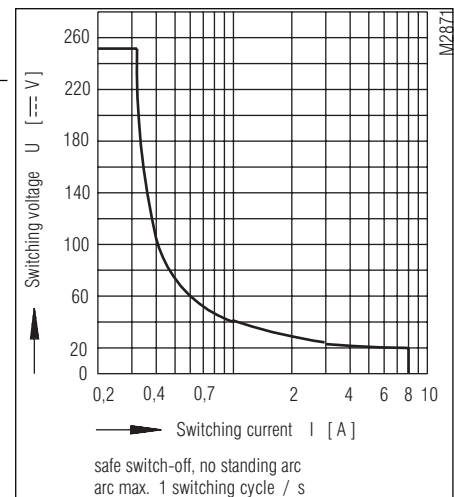


Limit curve for arc-free operation  
(at  $t_u = 20^\circ\text{C}$ )

## Dimensions, pin configuration, connection diagrams

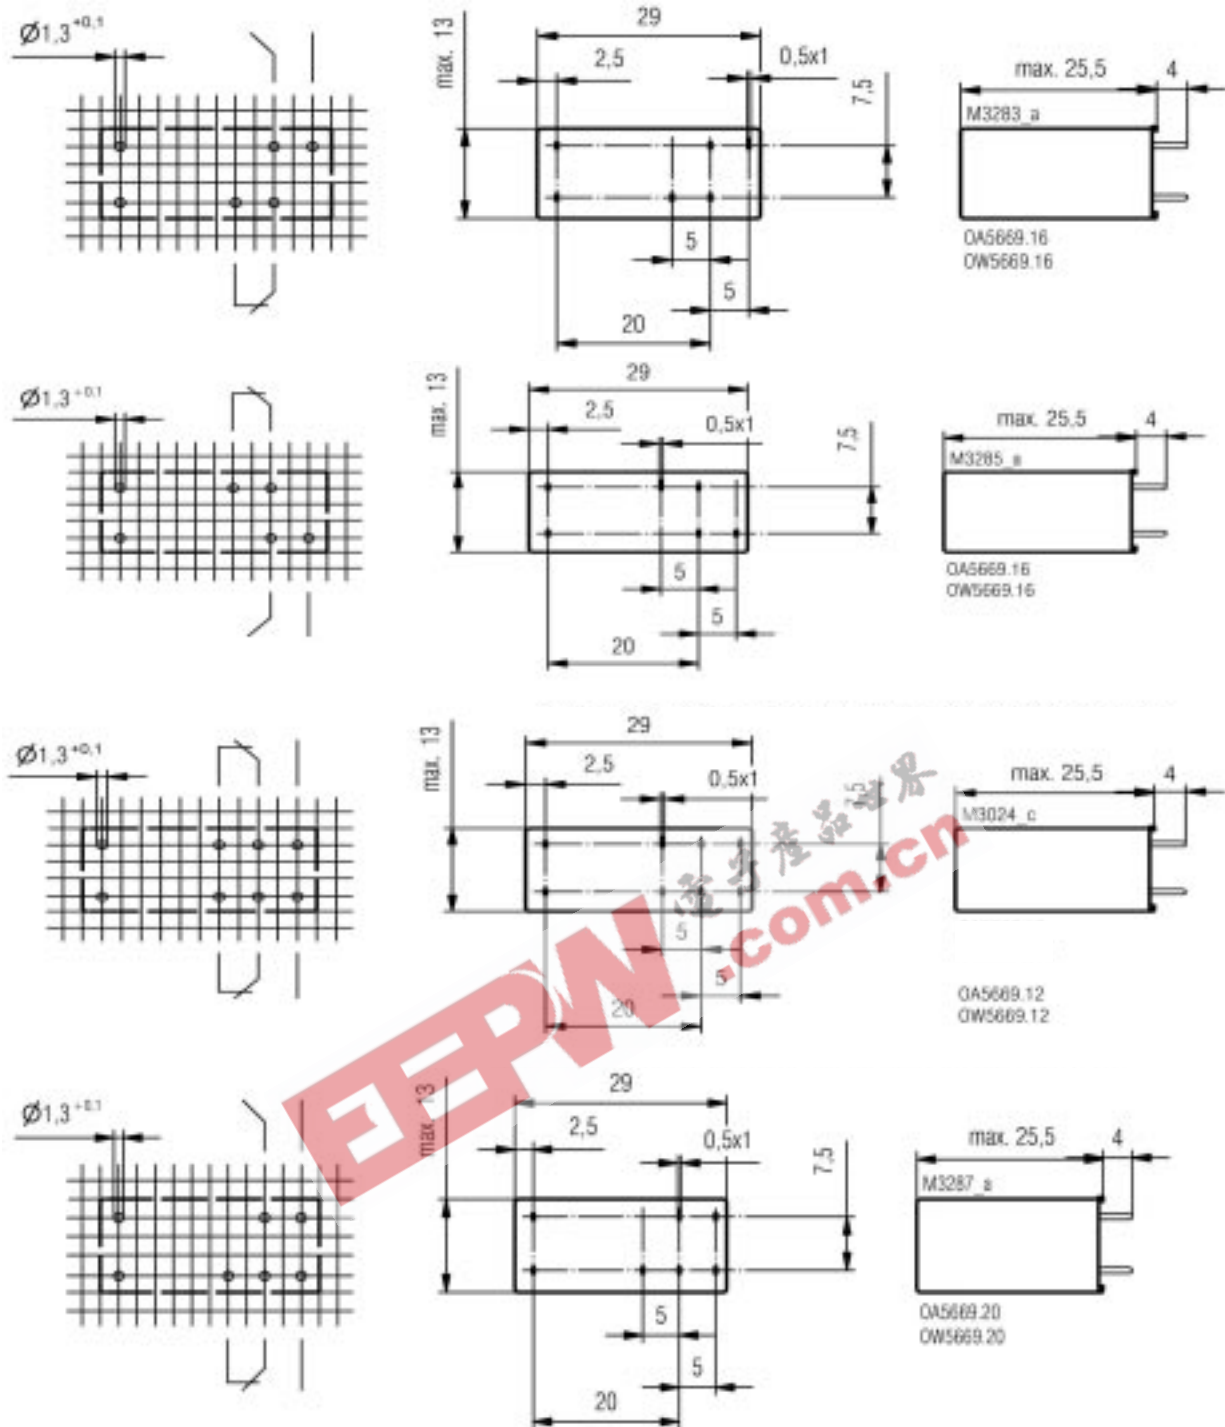

Connection for basic grid dimensions 2,5 mm as well as 2,54 mm according to IEC/EN 60 097 and IEC 60 326 average

## Dimensions, pin configuration, connection diagrams

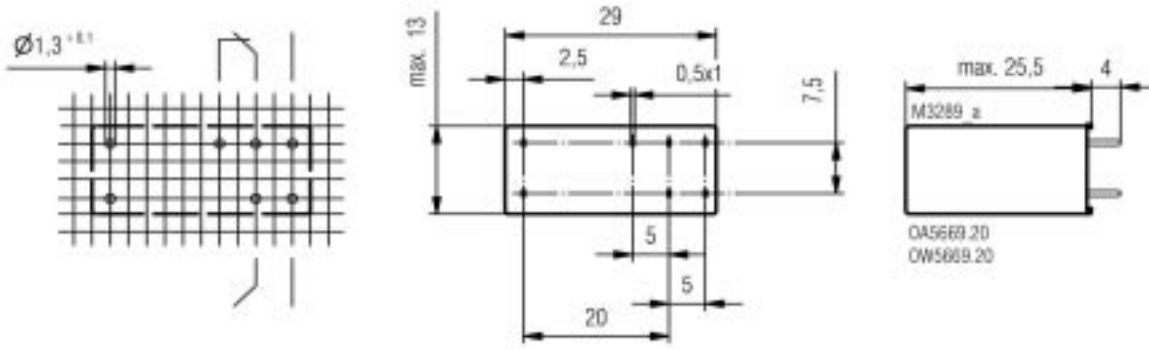

Connection for basic grid dimensions 2,5 mm as well as 2,54 mm according to IEC/EN 60 097 and IEC 60 326 average

## Accessories

