

OKI electronic components

OD125

InGaAs PIN Photodiode for Optical Communications

GENERAL DESCRIPTION

The OD125 is designed as a receiver AMP for 30-Mbit digital signals. It features a PIN photodiode and AMP built into a TO-18 metal package.


FEATURES

- Light input: -27 through -15 dBm
- Frequency characteristics: 30 MHz (Min.)
- Trans impedance: 90 dB (Typ.)
- Peak-sensitivity wavelength : 1300 nm


APPLICATIONS

- For optical transmission module (for digital signal reception)

PIN CONFIGURATION (Unit: mm)

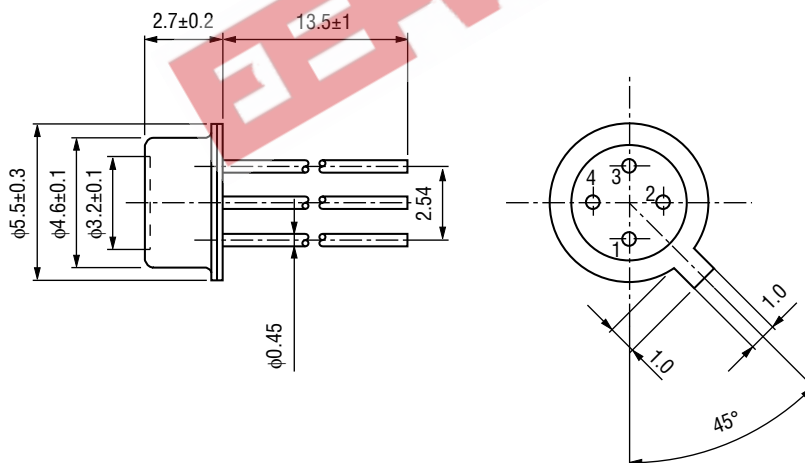

• Pin Connection Diagram

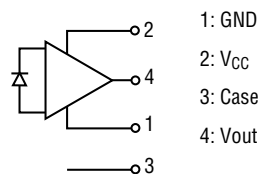

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Test Condition	Rating	Unit
Supply Voltage	V_{CC}	$T_a=25^{\circ}C$	8	V
Operating Temperature	T_{opr}	—	-30 to +80	$^{\circ}C$
Storage Temperature	T_{stg}	—	-40 to +100	$^{\circ}C$


ELECTRICAL AND OPTICAL CHARACTERISTICS

(Ambient Temperature $T_a=25^{\circ}C$)


Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Output Bias Voltage	V_B	$V_{CC}=5\text{ V}, Pin=0$	1.45	1.65	1.85	V
Photosensitivity	R	$\lambda=1.3\ \mu m, Pin=-20\text{ dBm}$	25	—	—	kV/W
Cutoff Frequency	f_c	$V_{CC}=5\text{ V}, -3\text{ dB from peak value}$	35	—	—	MHz
Output Noise Level	—	$f=32\text{ MHz}, \text{Band width } 3.1\text{ kHz}$	—	—	-85	dBm
Supply Current	I_{CC}	$V_{CC}=5\text{ V}, Pin=0$	—	9	—	mA

TYPICAL CHARACTERISTICS

- Cutoff Frequency vs. Ambient Temperature

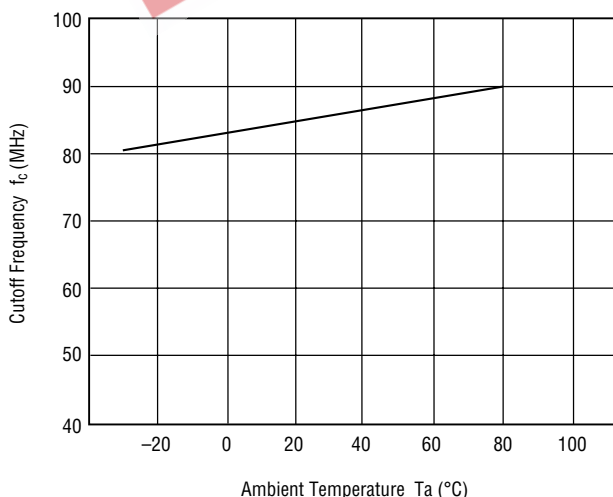

- Output Voltage vs. Frequency (Ta=25°C)

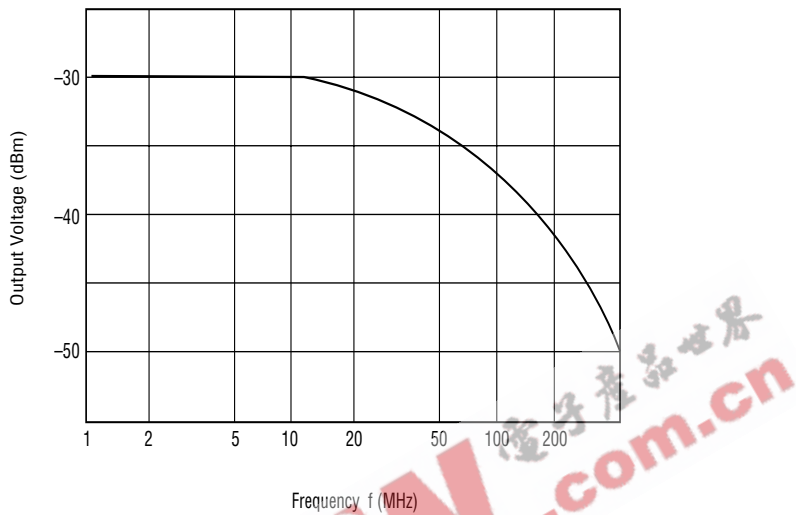

- Dark Voltage vs. Ambient Temperature

