
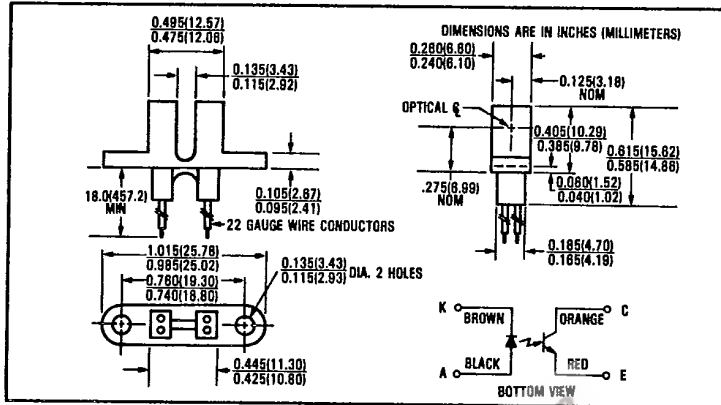


T-41-73

Slotted Optical Switches

Types OPB823A, OPB824A

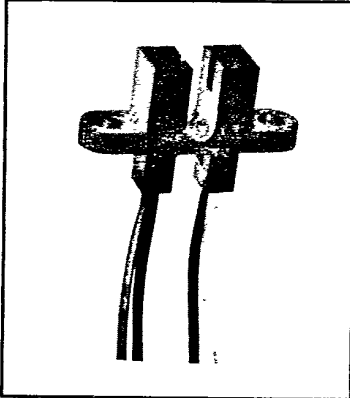

Features

- Non-contact switching
- Lead wires for electrical connection
- Fast switching speed

Description

The OPB823A and OPB824A each consist of an infrared emitting diode and an NPN silicon phototransistor mounted in a low cost black plastic housing on opposite sides of a 0.125" (3.18 mm) wide slot. Phototransistor switching takes place whenever an opaque object passes through the slot. 18" (457.2 mm) minimum length lead wires ease assembly where PC board mounting is not practical.

The OPB823A and OPB824A each utilize an OP140 or OP240 type LED and an OP550 family sensor.

Absolute Maximum Ratings (TA = 25°C unless otherwise noted)

Storage and Operating Temperature Range -40°C to +85°C⁽¹⁾

Input Diode

Reverse Voltage	2.0 V
Continuous Forward Current	50 mA
Peak Forward Current (1 μs pulse width, 300 pps)	3.0 A
Power Dissipation	100 mW ⁽²⁾

Output Phototransistor


Collector-Emitter Voltage	30 V
Emitter-Collector Voltage	5.0 V
Power Dissipation	100 mW ⁽²⁾

Notes:

- (1) Derate linearly 1.33 mW/°C above 25°C.
- (2) Junction temperature maintained at 25°C.
- (3) Methanol or isopropyl alcohols are recommended as cleaning agents.

Typical Performance Curves







Forward Current vs Forward Voltage Input Diode



Electrical Characteristics (TA = 25°C unless otherwise noted)

Symbol	Parameter	Min.	Max.	Units	Test Conditions
Input Diode					
V _F	Forward Voltage		1.70	V	I _F = 20 mA
I _R	Reverse Current		100	μA	V _R = 2.0 V
Output Phototransistor					
V _{(BR)CEO}	Collector-Emitter Breakdown Voltage	30.0		V	I _C = 1.00 mA
V _{(BR)ECO}	Emitter-Collector Breakdown Voltage	5.0		V	I _C = 100 μA
I _{CEO}	Collector-Emitter Dark Current		100	nA	V _{CE} = 10.0 V, I _F = 0, E _B = 0
Coupled					
V _{(CE)SAT}	Collector-Emitter Saturation Voltage	OPB823A OPB824A	0.40 0.40	V	I _F = 20 mA, I _C = 100 μA I _F = 20 mA, I _C = 250 μA
I _(ON)	On-State Collector Current	OPB823A OPB824A	200 500	μA μA	I _F = 20 mA, V _{CE} = 10.0 V I _F = 20 mA, V _{CE} = 10.0 V

Typical Performance Curves

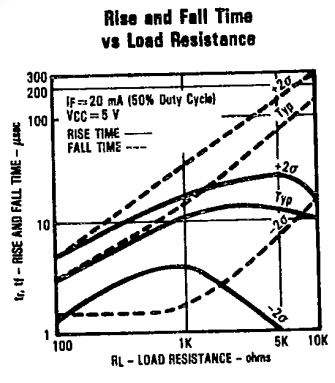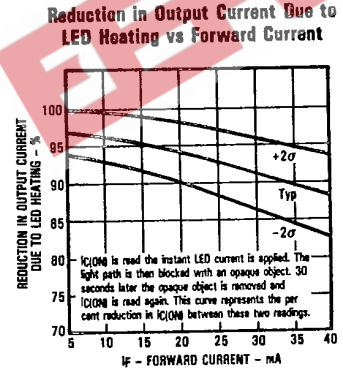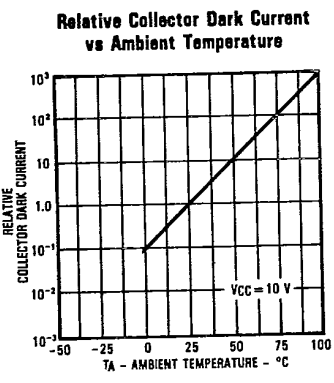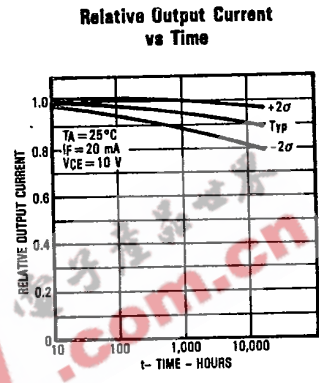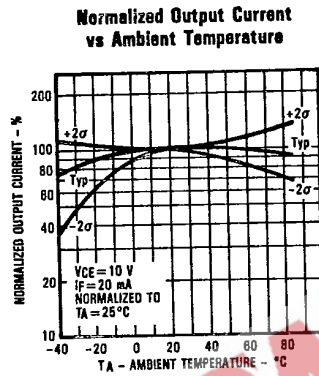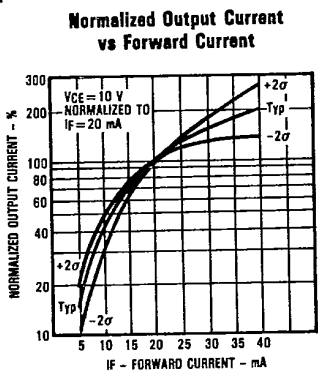

TRW reserves the right to make changes at any time in order to improve design and to supply the best product possible.
 Optoelectronics Division, TRW Electronic Components Group, 1215 W. Crosby Rd., Carrollton, TX 75006 (214) 323-2200, TLX 6716032 or 215849
 © TRW Inc. 1985. TRW is the name and mark of TRW Inc. Printed in U.S.A.