
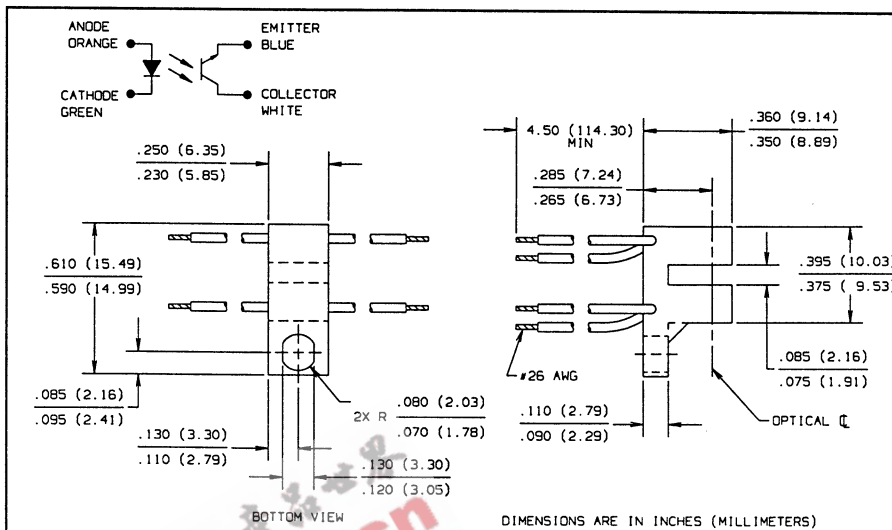


Slotted Optical Switches

Types OPB821, OPB821S10, OPB821S5, OPB821S3

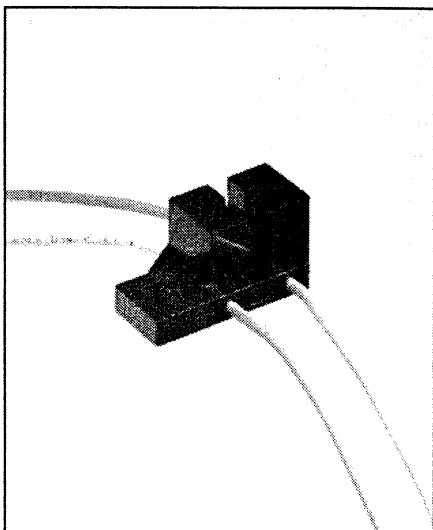

Features

- Three standard aperture sizes for high resolution
- Low profile, 0.080" (2.03 mm) wide slot
- 4.5" min, 26 AWG wire leads
- TX-TXV process available (see Hi-Rel section)

Description

The OPB821 series each consist of an infrared emitting diode and an NPN silicon phototransistor mounted in a low cost black plastic housing on opposite sides of a 0.080" (2.03 mm) wide slot. Phototransistor switching takes place whenever an opaque object passes through the slot. All assemblies have 0.040" (1.02 mm) wide apertures located in front of the infrared diode. For phototransistor side aperture size, see chart below. A minimum of 4.5" (114.3 mm) lead wires ease assembly where PC board mounting is not practical. Available with PC board mountable leads as OPB820 series.

OPB#	Phototransistor Aperture Width
OPB821	0.040"
OPB821S10	0.010"
OPB821S5	0.005"
OPB821S3	0.003"

Absolute Maximum Ratings (T_A = 25° C unless otherwise noted)

Storage and Operating Temperature Range -40° C to +80° C
 Lead Soldering Temperature [1/16 inch (1.6 mm) from case for 5 sec. with soldering iron]. 240° C

Input Diode

Continuous Forward Current 50 mA
 Peak Forward Current (1 μs pulse width, 300 pps) 3.0 A
 Reverse Voltage 2.0 V
 Power Dissipation 100 mW

Output Phototransistor

Collector-Emitter Voltage 30 V
 Emitter-Collector Voltage 5.0 V
 Power Dissipation 100 mW

Notes:

- (1) RMA flux is recommended. Duration can be extended to 10 sec. max. when flow soldering.
- (2) Derate linearly 1.82 mW/° C above 25° C.
- (3) Methanol or isopropanol are recommended as cleaning agents. Plastic housing is soluble in chlorinated hydrocarbons and ketones.
- (4) All parameters tested using pulse technique.

Types OPB821, OPB821S10, OPB821S5, OPB821S3

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)


SYMBOL	PARAMETER	MIN	MAX	UNITS	TEST CONDITIONS
Input Diode					
V_F	Forward Voltage		1.70	V	$I_F = 20\text{ mA}$
I_R	Reverse Current		100	μA	$V_R = 2\text{ V}$
Output Phototransistor					
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	30		V	$I_C = 1\text{ mA}$
$V_{(BR)ECO}$	Emitter-Collector Breakdown Voltage	5.0		V	$I_E = 100\text{ }\mu\text{A}$
I_{CEO}	Collector-Emitter Dark Current		100	nA	$V_{CE} = 10\text{ V}, I_F = 0, E_e = 0$
Coupled					
$V_{CE(SAT)}$	Collector-Emitter Saturation Voltage	OPB821 OPB821S10 OPB821S5 OPB821S3	0.4 0.4 0.4 0.4	V V V V	$I_C = 250\text{ }\mu\text{A}, I_F = 20\text{ mA}$ $I_C = 250\text{ }\mu\text{A}, I_F = 20\text{ mA}$ $I_C = 125\text{ }\mu\text{A}, I_F = 20\text{ mA}$ $I_C = 40\text{ }\mu\text{A}, I_F = 20\text{ mA}$
$I_{C(ON)}$	On-State Collector Current	OPB821 OPB821S10 OPB821S5 OPB821S3	500 400 300 60	μA μA μA μA	$V_{CE} = 5\text{ V}, I_F = 20\text{ mA}$ $V_{CE} = 5\text{ V}, I_F = 20\text{ mA}$ $V_{CE} = 5\text{ V}, I_F = 20\text{ mA}$ $V_{CE} = 5\text{ V}, I_F = 20\text{ mA}$

SLOTTED OPTICAL SWITCHES


Typical Performance Curves

OPB821, OPB821S10, OPB821S5, OPB821S3


Normalized Output Current vs Input Current

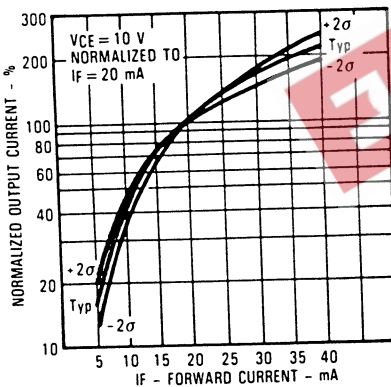

Rise and Fall Time vs Load Resistance

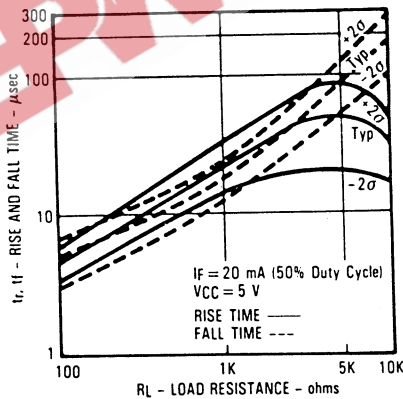


Normalized Output Current vs Ambient Temperature

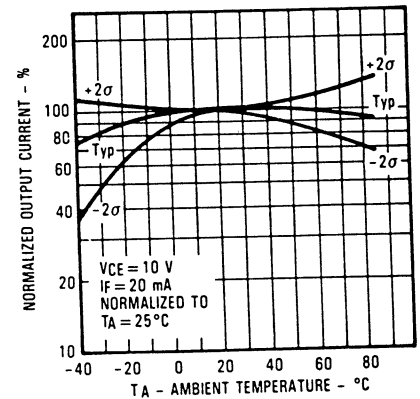


All Assemblies


Forward Current vs Forward Voltage Input Diode

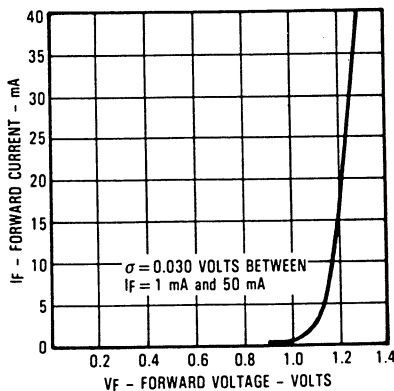

Relative Output Current vs Time

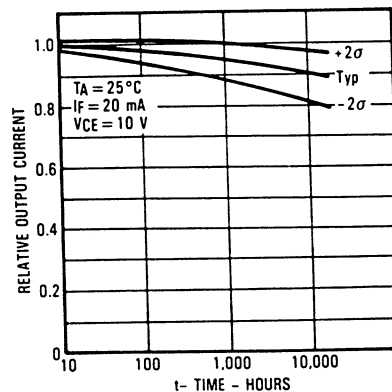

Reduction in Output Current Due to LED Heating vs Forward Current

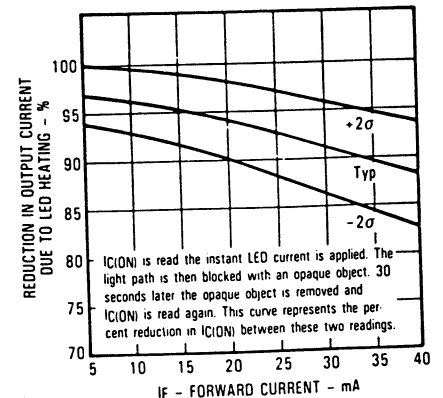

Optek reserves the right to make changes at any time in order to improve design and to supply the best product possible.

Optek Technology, Inc. 1215 W. Crosby Road Carrollton, Texas 75006 (972)323-2200 Fax (972)323-2396