

**M3 SERIES**

**P10CU-XXXXE 1KV ISOLATED 2W UNREGULATED SINGLE OUTPUT SIP7**

**Available Inputs:**

**5, 12, 24 and 48 VDC**

**Available Outputs:**

**5, 7.2, 12 and 15 VDC**

Other specifications please enquire

**Electrical Specifications**

(Typical at + 25° C, nominal input voltage, rated output current unless otherwise specified)

**Input Specifications**

Voltage range +/- 10 %

Filter Capacitors

**Isolation Specifications**

Rated voltage 1000 VDC

Leakage current 1 mA

Resistance 10<sup>9</sup> Ohm

Capacitance 60 pF typ.

**Output Specifications**

Voltage accuracy +/- 5 %, max.

Ripple and noise (at 20 MHz BW) 75 mV p-p, max.

Short circuit protection Momentary

Line voltage regulation +/- 1,2 % / 1,0 % of Vin

Load voltage regulation +/- 8 %, load = 20 ~ 100 %

Temperature coefficient +/- 0,02 % / °C

**General Specifications**

Efficiency 70 % to 85 %

Switching frequency 85 KHz, typ.

**Environmental Specifications**

Operating temperature (ambient) - 40° C to + 85° C

Storage temperature - 55 °C to + 125 °C

Derating See graph

Humidity Up to 90 %, non condensing

Cooling Free air convection

**Physical Characteristics**

Dimensions SIP 19,50 x 6,00 x 9,50 mm

0,76 x 0,24 x 0,37 inches


Weight 2,5 g 3,5 g for 48 VDC

Case material Non conductive black plastic


**Examples of Partnumbers/Modelcode**

PART NO.	INPUT VOLTAGE (VDC)	INPUT CURRENT NO LOAD	INPUT CURRENT FULL LOAD	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (max. mA)	EFFICIENCY FULL LOAD (% TYP.)
P10CU-0505E	5	28	555	5	400	72
P10CU-0512E	5	28	500	12	167	80
P10CU-1205E	12	22	228	5	400	73
P10CU-1212E	12	20	208	12	167	80
P10CU-2405E	24	10	113	5	400	74
P10CU-2412E	24	9	101	12	167	82

Dimensions

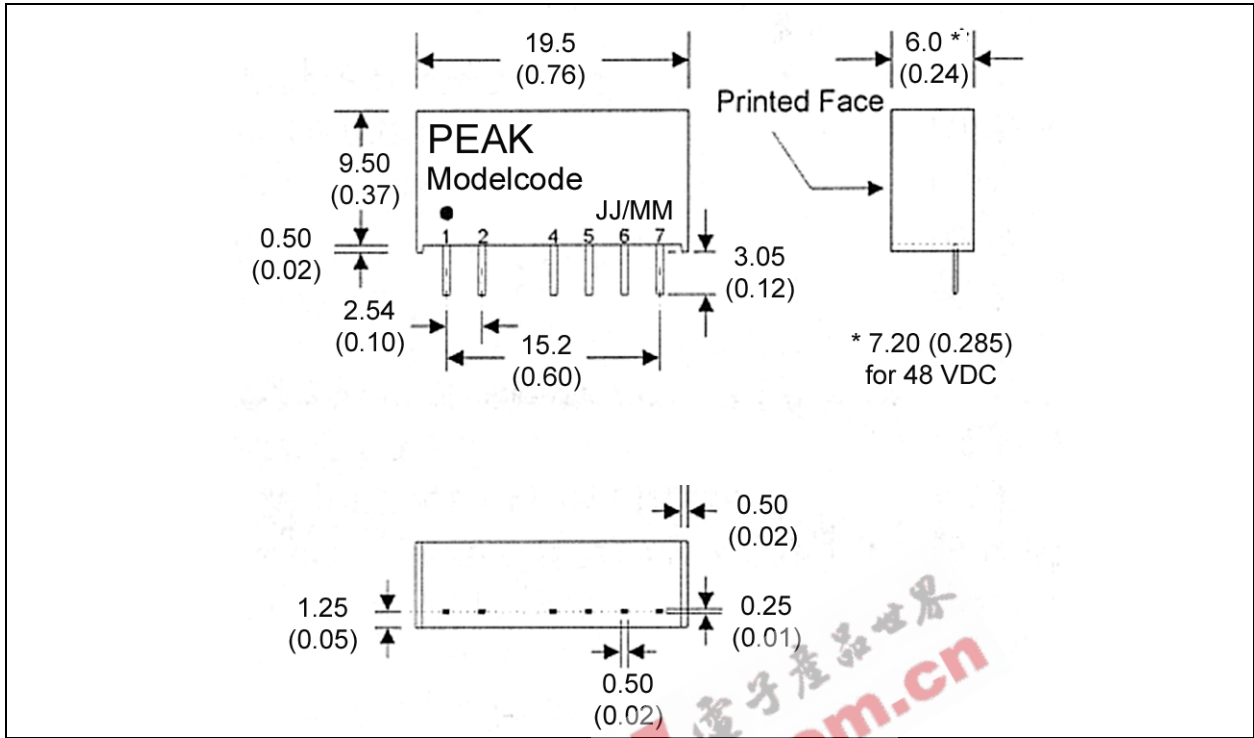

Derating Graph and Pinning

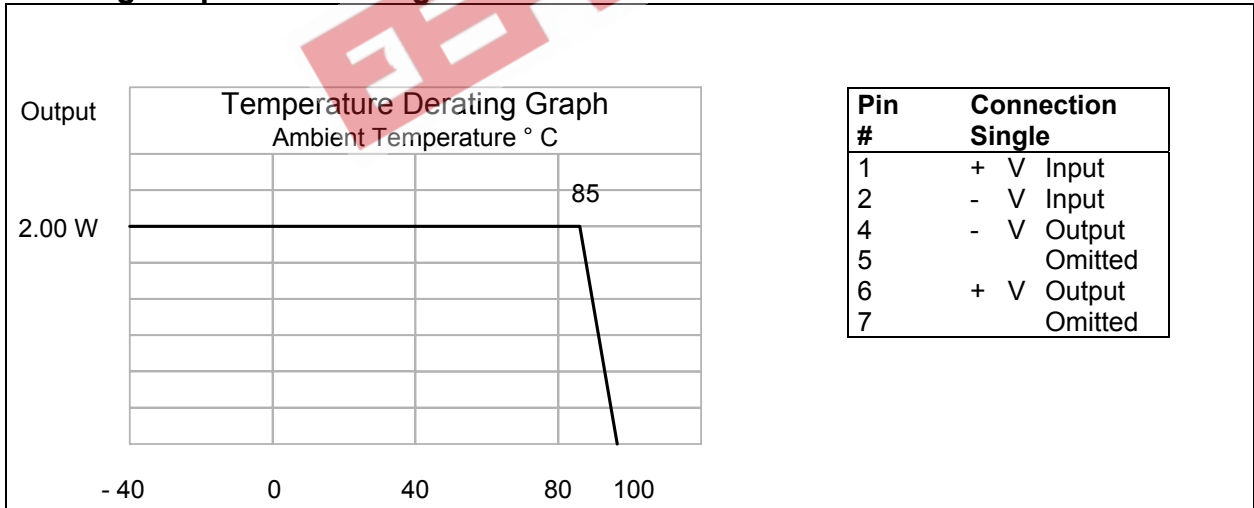

Specification can be changed without notice.

Copyright PEAK electronics GmbH