


Data Sheet

Type Number 6231
Designation IEC ---
System Li-Manganese dioxide / Organic Electrolyte

UL Recognition:..... pending
Nominal Voltage 6 V
Typical Capacity C 170 mAh
 Load 13 kOhm, at 20°C down to 4 V

Weight (approx.) 8,8 g
Volume 3,1 ccm
Coding..... Date of Manufacturing Quater/Year

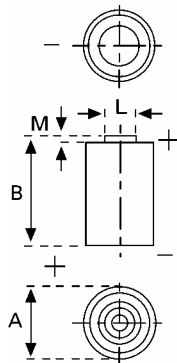

Temperature Ranges

Storage	min	max.
Discharge	-55°C	70°C
	-20°C	65°C

Dimensions

Diameter (A)	min	max.
Height (B)	12,8	13,0
Shoulder Diameter[L].....	24,4	25,1
Shoulder Height [M].....	5,5	
	1,1	

Segment
 Electronic

Main Applications
 Photo
 Electronic

Typical Capacities (at 20°C)

Discharge Type	Load	End Voltage:	4.0 V
Continuous 24h/d,7d/w Current [µA]:	13000 Ω	Time: Capacity [mAh]: Energy [mWh]:	395 h 170 945

All Data contained herein is for single cells

For battery applications, performance data may vary from single cell data, depending on specific battery configuration

VARTA Microbattery GmbH, Daimlerstr. 1, D-73479 Ellwangen/Jagst
 Tel.: (+49) 7961/921-0, Telefax: (+49) 7961/921-553

Subject to change without prior notice!
 Date of issue: 2004-12-16