
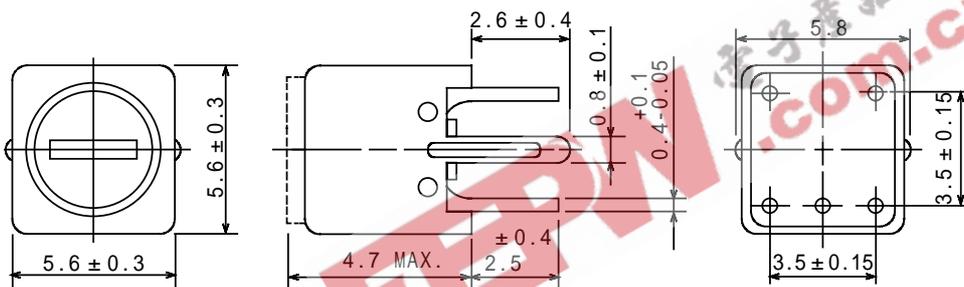
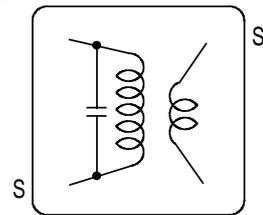


Type: P-5FB
Product Description

- 5.9 × 5.9 mm Max.(L × W), 4.7mm Max. Height.
- Inductance:1~680 μ H Max.
- Operating frequency:20MHz Max.
- In addition to the reference versions of parameters shown here, custom designs are available to meet your exact requirements.


Feature

- Variable shielded type.
- Internally assembled capacitor is available.
- RoHS Compliance

Dimensions (mm)

Connection (Bottom View)


"S" is winding start

- * Dimension does not include solder used on coil.
- * Pin pitch shall be measured at the root of terminal.
- * Dimensions without tolerance are approx.

Specification

Item	(1 - 3)	Measuring Condition
Frequency	4 5 5 k H z $\pm 1 \%$ Variable	
Unloaded Q	4 5 Min.	4 5 5 k H z
INT Capacity	4 7 0 p F $\pm 1 0 \%$	
Ext.stray capacity 0pF between (1-3) at measuring.		