

M1 SERIES P6DU-XXXXZ 1KV ISOLATED 1W UNREGULATED DUAL OUTPUT DIP14

Available Inputs:

5, 12, 24 and 48 VDC

Available Outputs:

(+/-) 3.3, 5, 7.2, 12, 15 and 18 VDC

Other specifications please enquire.

Electrical Specifications

(Typical at + 25° C, nominal input voltage, rated output current unless otherwise specified)

Input Specifications

Voltage range +/- 10 %
Filter Capacitors

Isolation Specifications

Rated voltage 1000 VDC
Leakage current 1 mA
Resistance 10⁹ Ohm
Capacitance 60 pF typ.

Output Specifications

Voltage accuracy +/- 5 %, max.
Ripple and noise (at 20 MHz BW) 75 mV p-p, max.
Short circuit protection Momentary
Line voltage regulation +/- 1,2 % / 1,0 % of Vin
Load voltage regulation +/- 8 %, load = 20 ~ 100 %
Temperature coefficient +/- 0,02 % / °C

General Specifications

Efficiency 67 % to 80 %
Switching frequency 125 KHz, typ.

Environmental Specifications

Operating temperature (ambient) - 40° C to + 85° C
Storage temperature - 55 °C to + 125 °C
Derating See graph
Humidity Up to 90 %, non condensing
Cooling Free air convection


Physical Characteristics

Dimensions DIP 20,32 x 10,16 x 6,85 mm
0,80 x 0,40 x 0,77 inches
Weight 2 g
Case material Non conductive black plastic


Examples of Partnumbers

PART NO.	INPUT VOLTAGE (VDC)	INPUT CURRENT NO LOAD	INPUT CURRENT FULL LOAD	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (max. mA)	EFFICIENCY FULL LOAD (% TYP.)
P6DU-0505Z	5	16	281	+/- 5	+/- 100	71
P6DU-0512Z	5	18	253	+/- 12	+/- 42	79
P6DU-1205Z	12	11	119	+/- 5	+/- 100	70
P6DU-1212Z	12	10	104	+/- 12	+/- 42	80
P6DU-243R3Z	24	5	56	+/- 3,3	+/- 150	74
P6DU-2405Z	24	6	55	+/- 5	+/- 100	76
P6DU-2412Z	24	8	55	+/- 12	+/- 42	76
P6DU-4805Z	48	5	31	+/- 5	+/- 100	67
P6DU-4812Z	48	6	27	+/- 12	+/- 42	77

Dimensions

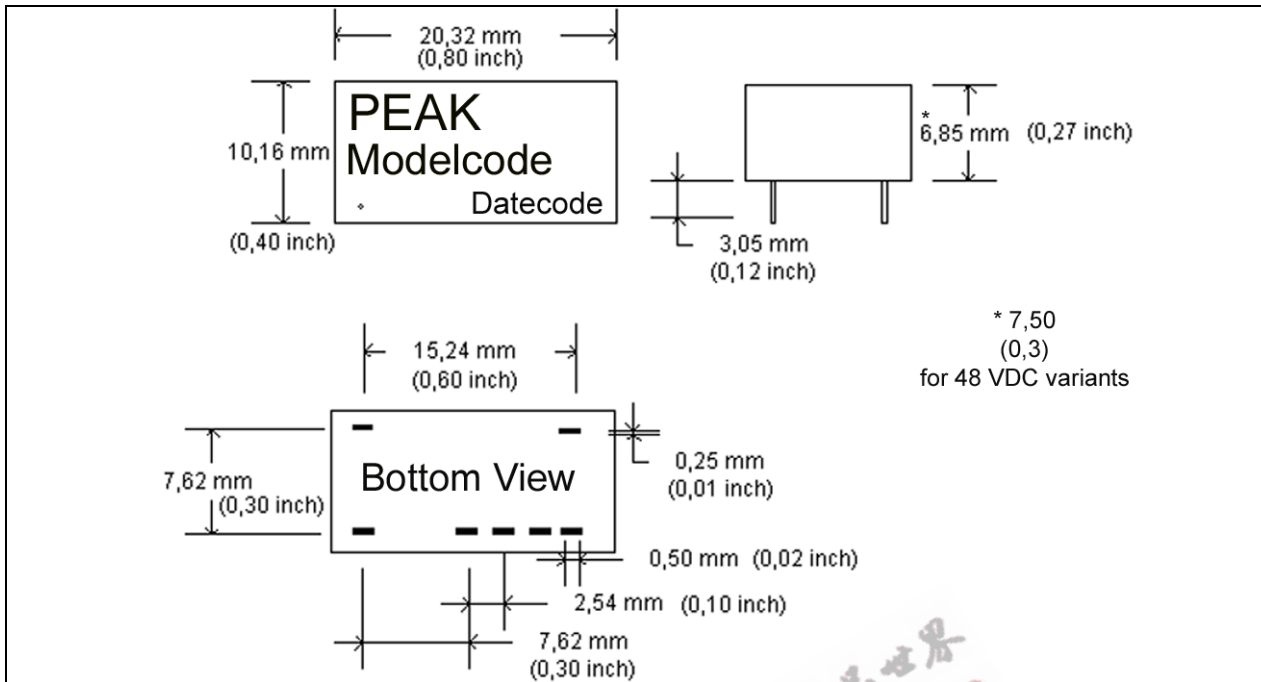

Derating Graph and Pinning

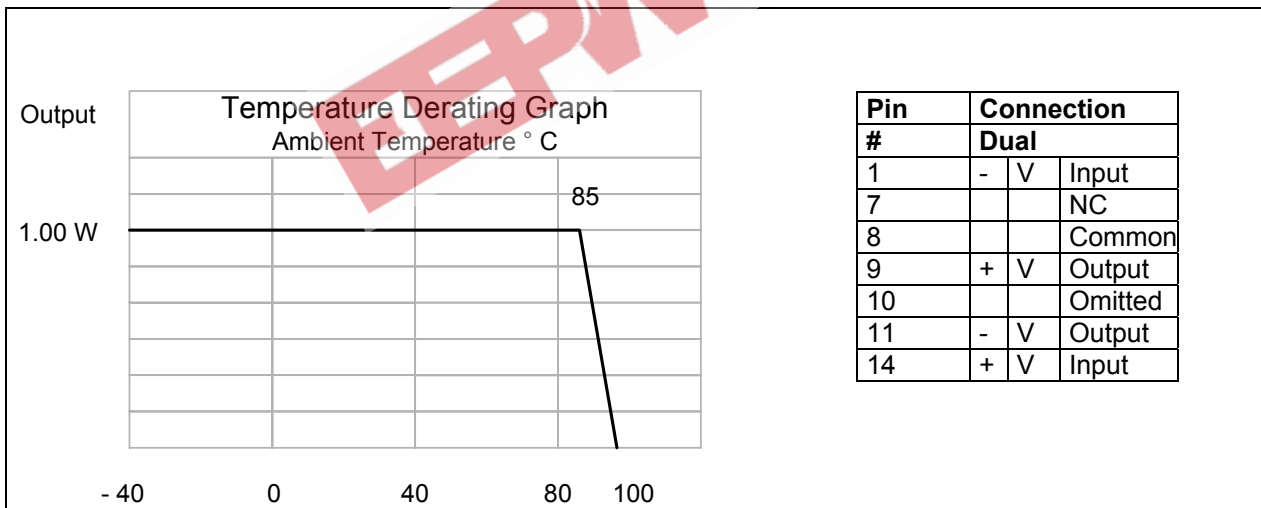

Specification can be changed without notice.

Copyright PEAK electronics GmbH