

**M1 SERIES P6DU-XXXXE 1KV ISOLATED 1W UNREGULATED SINGLE OUTPUT DIP14**

**Available Inputs:**

**5, 12, 24 and 48 VDC**

**Available Outputs:**

**3.3, 5, 7.2, 12, 15 and 18 VDC**

Other specifications please enquire.

**Electrical Specifications**

(Typical at + 25° C, nominal input voltage, rated output current unless otherwise specified)

**Input Specifications**

Voltage range +/- 10 %  
Filter Capacitors

**Isolation Specifications**

Rated voltage 1000 VDC  
Leakage current 1 mA  
Resistance 10<sup>9</sup> Ohm  
Capacitance 60 pF typ.

**Output Specifications**

Voltage accuracy +/- 5 %, max.  
Ripple and noise (at 20 MHz BW) 75 mV p-p, max.  
Short circuit protection Momentary  
Line voltage regulation +/- 1,2 % / 1,0 % of Vin  
Load voltage regulation +/- 8 %, load = 20 ~ 100 %  
Temperature coefficient +/- 0,02 % / °C

**General Specifications**

Efficiency 70 % to 85 %  
Switching frequency 125 KHz, typ.

**Environmental Specifications**

Operating temperature (ambient) - 40° C to + 85° C  
Storage temperature - 55 °C to + 125 °C  
Derating See graph  
Humidity Up to 90 %, non condensing  
Cooling Free air convection


**Physical Characteristics**

Dimensions DIP 20,32 x 10,16 x 6,85 mm  
0,80 x 0,40 x 0,77 inches  
Weight 2 g  
Case material Non conductive black plastic


**Examples of Partnumbers/Modelcode**

PART NO.	INPUT VOLTAGE (VDC)	INPUT CURRENT NO LOAD	INPUT CURRENT FULL LOAD	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (max. mA)	EFFICIENCY FULL LOAD (% TYP.)
P6DU-0505E	5	16	266	5	200	75
P6DU-0512E	5	18	254	12	84	79
P6DU-1205E	12	11	119	5	200	70
P6DU-1212E	12	10	104	12	84	80
P6DU-243R3E	24	5	56	3,3	303	74
P6DU-2405E	24	6	55	5	200	76
P6DU-2412E	24	7	54	12	84	77
P6DU-4805E	48	5	31	5	200	67
P6DU-4812E	48	6	28	12	84	74

**Dimensions**

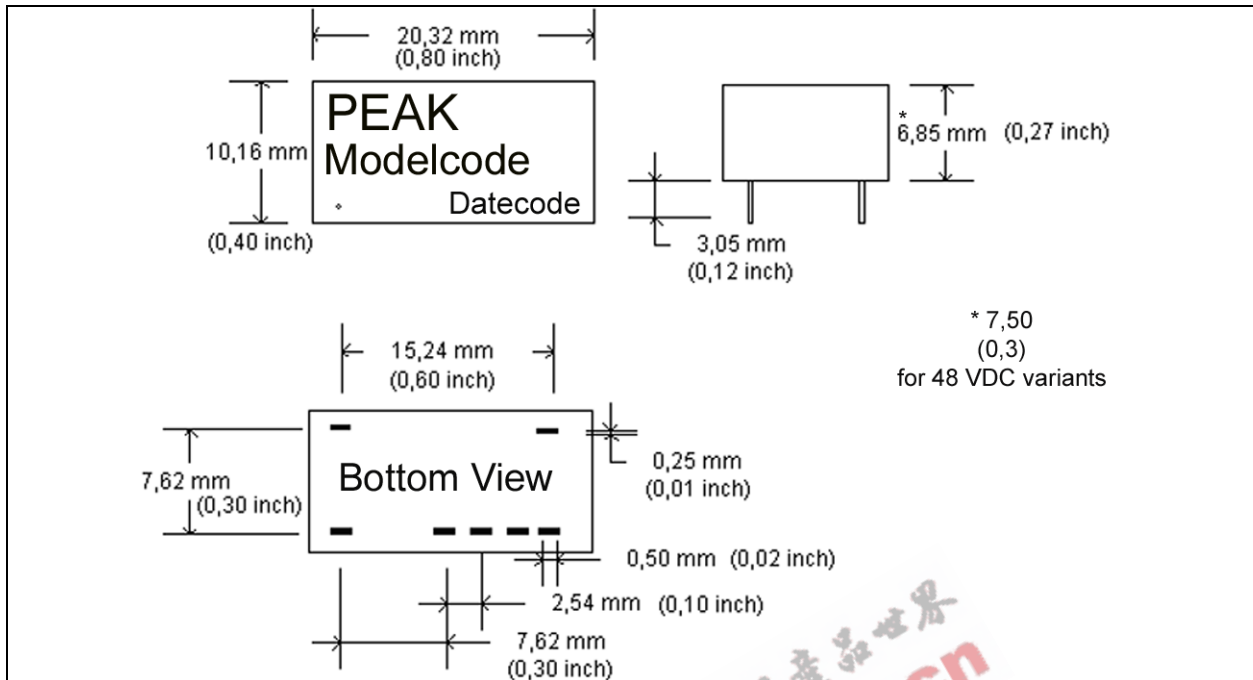

**Derating Graph and Pinning**

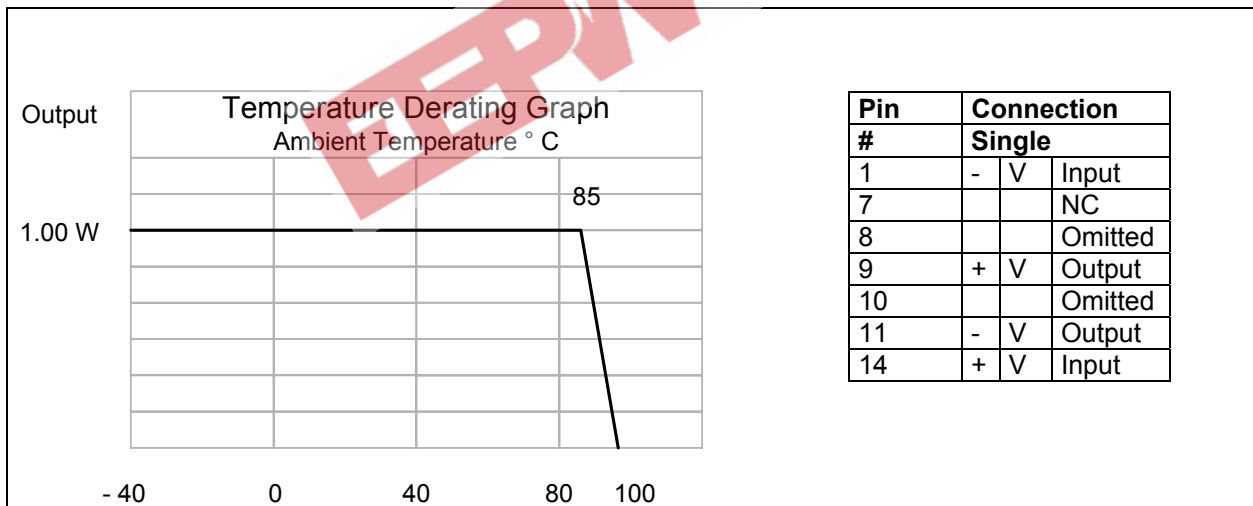

Specification can be changed without notice.

Copyright PEAK electronics GmbH