


## PNP Silicon High-Voltage Transistors

PZTA 92  
PZTA 93

- High breakdown voltage
- Low collector-emitter saturation voltage
- Complementary types: PZTA 42, PZTA 43 (NPN)

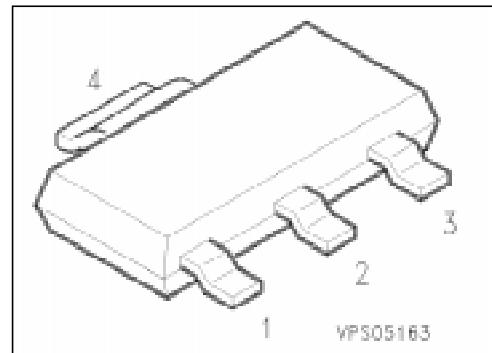

Type	Marking	Ordering Code (tape and reel)	Pin Configuration				Package <sup>1)</sup>
			1	2	3	4	
PZTA 92	PZTA 92	Q62702-Z2037	B	C	E	C	SOT-223
PZTA 93	PZTA 93	Q62702-Z2038					

### Maximum Ratings

Parameter	Symbol	Values		Unit
		PZTA 92	PZTA 93	
Collector-emitter voltage	$V_{CE0}$	300	200	V
Collector-base voltage	$V_{CB0}$	300	200	
Emitter-base voltage	$V_{EB0}$	5		
Collector current	$I_C$	500		mA
Base current	$I_B$	100		
Total power dissipation, $T_S = 124^\circ\text{C}$	$P_{tot}$	1.5		W
Junction temperature	$T_j$	150		$^\circ\text{C}$
Storage temperature range	$T_{stg}$	– 65 ... + 150		

### Thermal Resistance

Junction - ambient <sup>2)</sup>	$R_{th JA}$	$\leq 72$	K/W
Junction - soldering point	$R_{th JS}$	$\leq 17$	

<sup>1)</sup> For detailed information see chapter Package Outlines.

<sup>2)</sup> Package mounted on epoxy pcb 40 mm × 40 mm × 1.5 mm/6 cm<sup>2</sup> Cu.

**Electrical Characteristics**at  $T_A = 25^\circ\text{C}$ , unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	

**DC characteristics**


Collector-emitter breakdown voltage $I_C = 1 \text{ mA}, I_B = 0$	$V_{(\text{BR})\text{CE}0}$	300 200	— —	— —	V
Collector-base breakdown voltage $I_C = 100 \mu\text{A}, I_B = 0$	$V_{(\text{BR})\text{CB}0}$	300 200	— —	— —	
Emitter-base breakdown voltage $I_E = 100 \mu\text{A}, I_C = 0$	$V_{(\text{BR})\text{EB}0}$	5	—	—	
Collector-base cutoff current $V_{CB} = 200 \text{ V}$	$I_{CB0}$	—	—	250	nA
$V_{CB} = 160 \text{ V}$		—	—	250	nA
$V_{CB} = 200 \text{ V}, T_A = 150^\circ\text{C}$	PZTA 92	—	—	20	μA
$V_{CB} = 160 \text{ V}, T_A = 150^\circ\text{C}$	PZTA 93	—	—	20	μA
Emitter-base cutoff current $V_{EB} = 3 \text{ V}, I_C = 0$	$I_{EB0}$	—	—	100	nA
DC current gain <sup>1)</sup> $I_C = 1 \text{ mA}, V_{CE} = 10 \text{ V}$	$h_{FE}$	25 40 25	— — —	— — —	—
$I_C = 10 \text{ mA}, V_{CE} = 10 \text{ V}$					
$I_C = 30 \text{ mA}, V_{CE} = 10 \text{ V}$					
Collector-emitter saturation voltage <sup>1)</sup> $I_C = 20 \text{ mA}, I_B = 2 \text{ mA}$	$V_{CE\text{sat}}$	— —	— —	0.5 0.4	V
PZTA 92					
PZTA 93					
Base-emitter saturation voltage <sup>1)</sup> $I_C = 20 \text{ mA}, I_B = 2 \text{ mA}$	$V_{BE\text{sat}}$	—	—	0.9	

**AC characteristics**


Transition frequency $I_C = 20 \text{ mA}, V_{CE} = 10 \text{ V}, f = 100 \text{ MHz}$	$f$	—	100	—	MHz
Collector-base capacitance $V_{CB} = 20 \text{ V}, f = 1 \text{ MHz}$	$C_{\text{cbo}}$	— —	— —	6 8	pF

<sup>1)</sup> Pulse test conditions:  $t \leq 300 \mu\text{s}$ ,  $D = 2\%$ .


**Total power dissipation**  $P_{\text{tot}} = f(T_A^*; T_S)$   
 \* Package mounted on epoxy

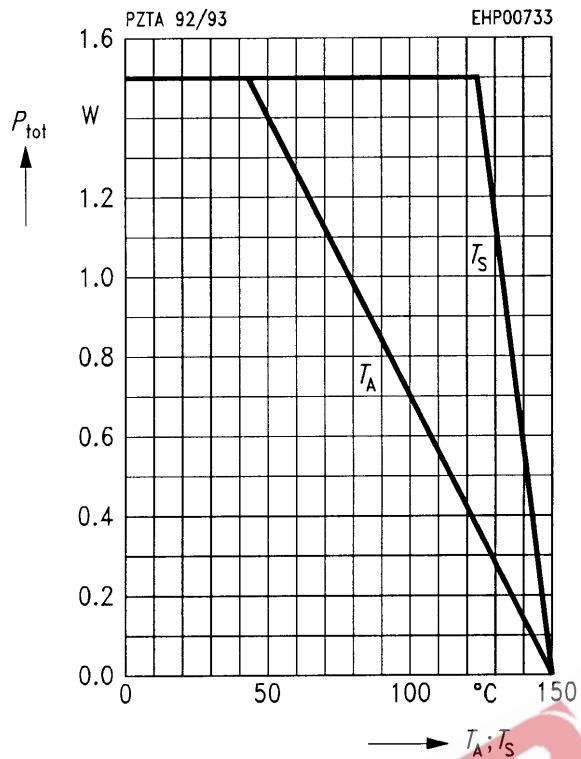


**Permissible pulse load**  $P_{\text{tot max}} / P_{\text{tot DC}} = f(t_p)$

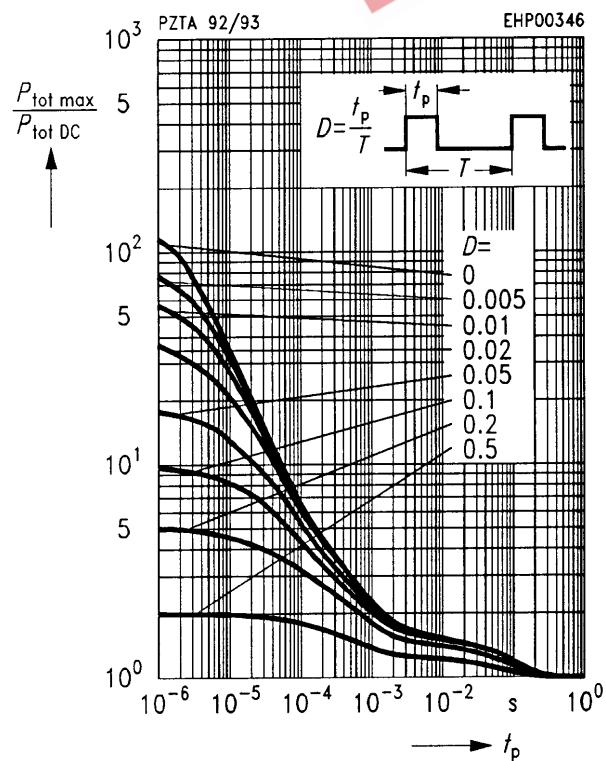


**Transition frequency**  $f_T = f(I_C)$   
 $V_{\text{CE}} = 10 \text{ V}, f = 100 \text{ MHz}$

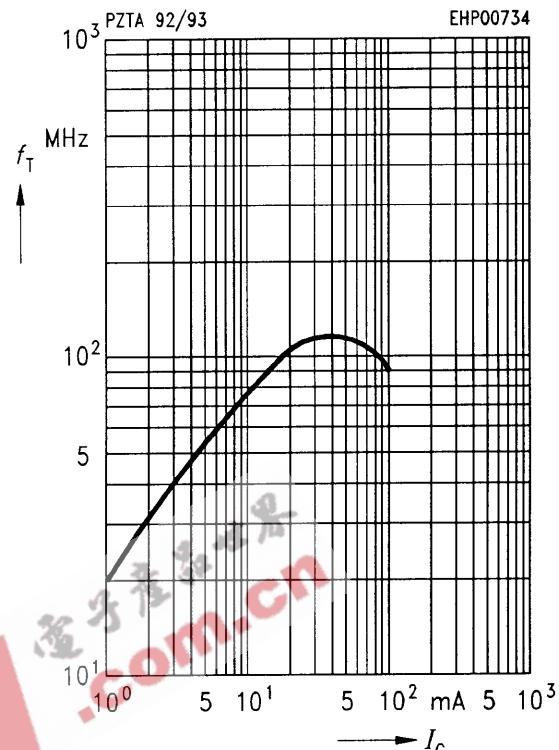

**DC current gain**  $h_{\text{FE}} = f(I_C)$   
 $V_{\text{CE}} = 10 \text{ V}$

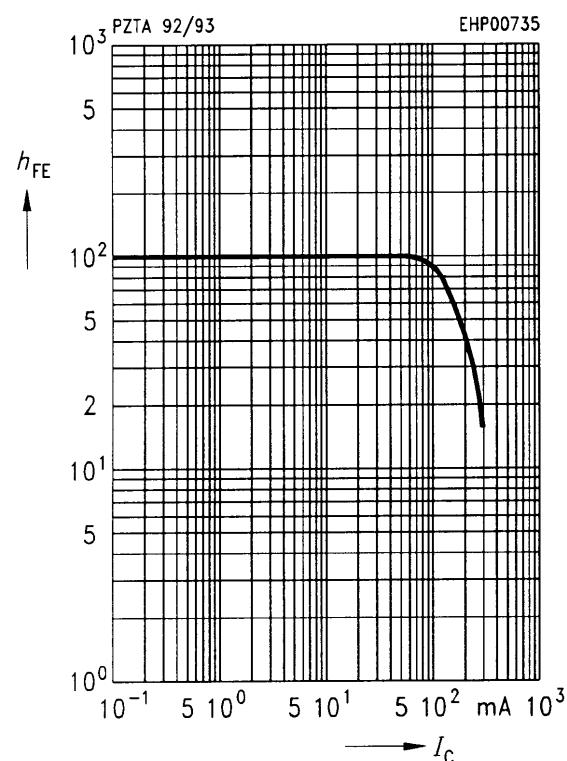

**Collector cutoff current**  $I_{CB0} = f(T_A)$   
 $V_{CB} = 160$  V

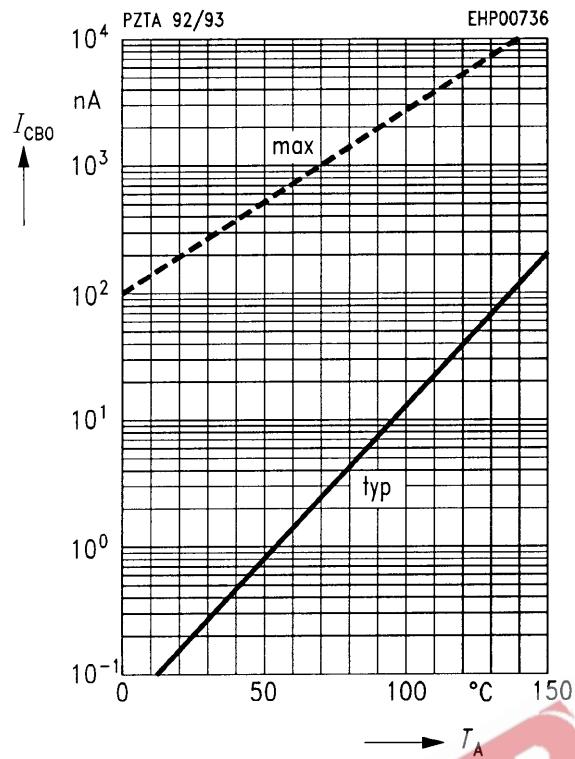

**Collector current**  $I_C = f(V_{BE})$   
 $V_{CE} = 10$  V

