


Fast-Recovery Rectifier Diodes


Type No.	Parameter	Absolute Maximum Ratings					Electrical Characteristics (Ta=25°C)							Others	
		VRM (V)	IF(AV) (A)	IFSM (A) 50Hz Half-cycle Sinewave Single Shot	Tj (°C)	Tstg (°C)	VF (V)		IR (μA)	IR (H) (μA)	trr(1) (μs)	trr(2) (μs)	Rth (j-ℓ) (°C/W)	Mass (g)	
							max	IF (A)							VR=VRM max
RU 1		400	0.25	15	-40 to +150	2.5	0.25	10	200	0.4	10/10	0.18	10/20	15	0.4
RU 1A	600														
RU 1B	800														
RU 1C	1000	0.2	3.0												
RU 2Z	200	1.0	20	1.5		1.0	10	300	0.4	10/10	0.18	10/20	15	0.4	
RU 2	600														
RU 2B	800														
RU 2C	1000	0.8	1.2												
RU 2M	400	1.1	20	1.2		1.1	10	300	0.4	10/10	0.18	10/20	15	0.4	
RU 2AM	600														

RU 1 series


Ta—IF(AV) Derating



VF—IF Characteristics (Typical)

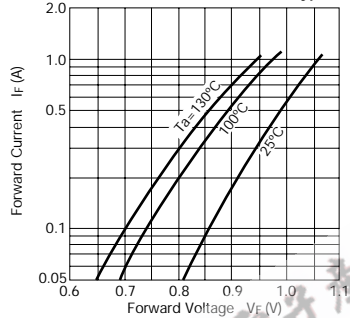


IFSM Rating

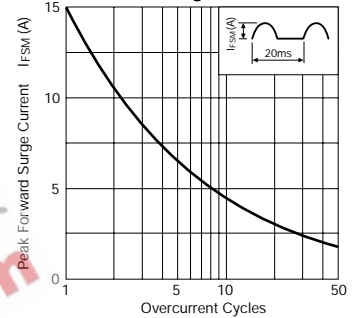


RU 2 series


Ta—IF(AV) Derating



VF—IF Characteristics (Typical)

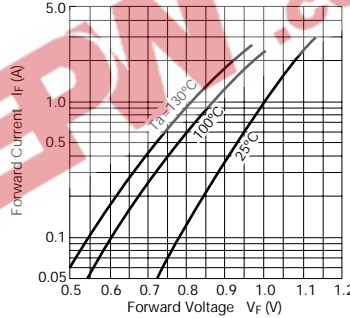


IFSM Rating

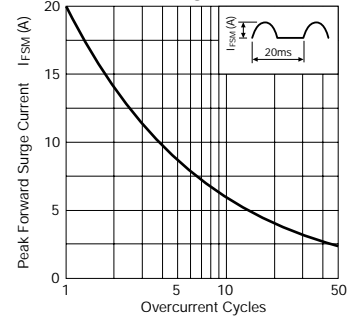


RU 2M series


Ta—IF(AV) Derating

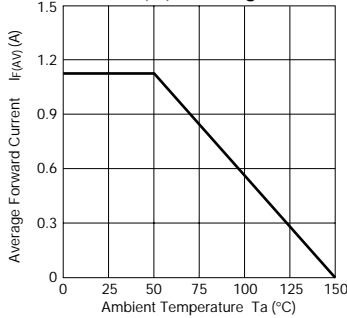

VF—IF Characteristics (Typical)

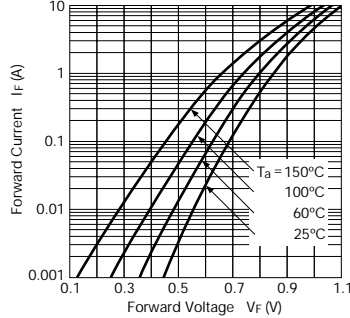

IFSM Rating

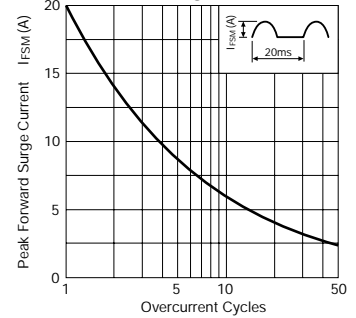

External Dimensions

(Unit: mm)

Flammability:
UL94V-0 or Equivalent

