



RUSH

**50ns ULTRA-FAST RECOVERY
HIGH -VOLTAGE RECTIFIER DIODES**

- PRV to 5,000 Volts
- 50ns ultra-fast recovery
- Small size
- Exceptionally low leakage
- High surge capability
- Avalanche characteristics



PRV	3000	4000	5000
EDI type	RUSH103	RUSH104	RUSH105

ELECTRICAL CHARACTERISTICS (at $T_A = 25^\circ\text{C}$ Unless Otherwise Specified)

Average Rectified Forward Current @ 50°C , I_o (Fig.1)	200 mA
Max. Peak Surge Current, I_{FSM} (8.3ms)	8 Amp
Max. Reverse Recovery, T_{rr} , Fig.4	50ns
Max. Forward Voltage Drop @ 200 mA, V_F	15 Volts
Max. DC Reverse Current @ PRV and 25°C , I_R	1 μA
Max. DC Reverse Current @ PRV and 100°C , I_R	25 μA
Ambient Operating Temperature Range, T_A	-55 to +150 $^\circ\text{C}$
Storage Temperature Range, T_{STG}	-55 to +150 $^\circ\text{C}$

NOTES:

1. It is recommended that a proper heat sink be used on the terminals of this device between the body and soldering point to prevent damage from excess heat.

2. If operated over 10,000v/inch in length, devices should be immersed in oil or re - encapsulated.

EDI reserves the right to change these specifications at any time without notice.

FIG.1

OUTPUT CURRENT vs AMBIENT TEMPERATURE

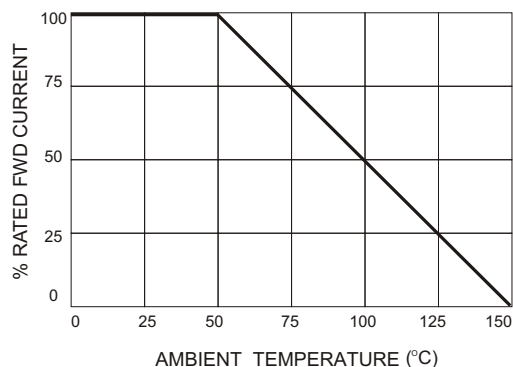


FIG.2

NON-REPETITIVE SURGE CURRENT


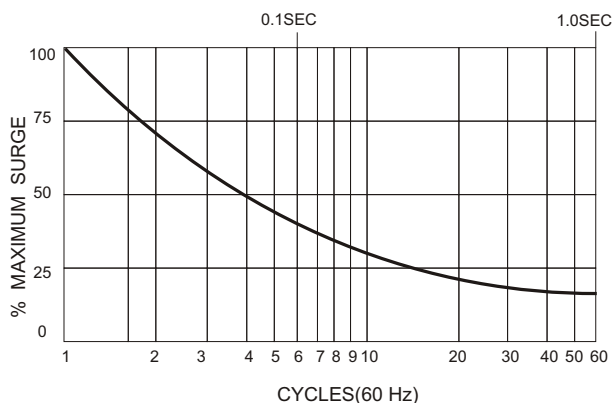


FIG.3


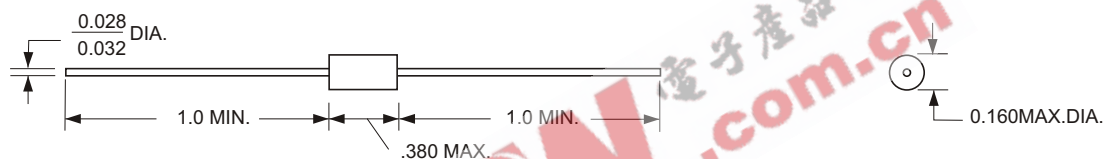


ALL DIMENSIONS IN INCHES

Maximum lead and terminal temperature for soldering, 3/8 inch form case, 5 seconds at 250°C

FIG.4
TEST CIRCUIT

TYPICAL REVERSE RECOVERY WAVEFORM

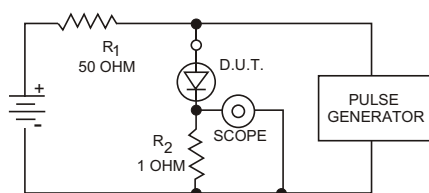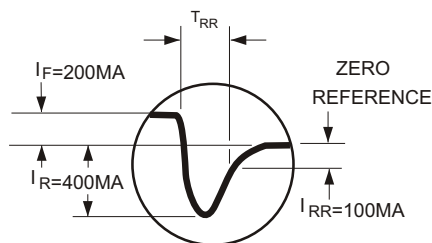

R_1, R_2 NON-INDUCTIVE RESISTORS
PULSE GENERATOR-HEWLETT PACKARD 214A OR EQUIV.
1KC REP.RATE, $10\ \mu$ SEC. PULSE WIDTH
ADJUST PULSE AMPLITUDE FOR PEAK I_R

EDI reserves the right to change these specifications at any time without notice.