

4A, 600V Ultrafast Diodes

The RURD460, and RURD460S are ultrafast diodes with soft recovery characteristics ($t_{rr} < 55\text{ns}$). They have low forward voltage drop and are silicon nitride passivated ion-implanted epitaxial planar construction.

These devices are intended for use as freewheeling/clamping diodes and rectifiers in a variety of switching power supplies and other power switching applications. Their low stored charge and ultrafast soft recovery minimize ringing and electrical noise in many power switching circuits reducing power loss in the switching transistors.

Formerly developmental type TA49035.

Ordering Information

| PART NUMBER | PACKAGE | BRAND |
|-------------|---------|--------|
| RURD460 | TO-251 | RUR460 |
| RURD460S | TO-252 | RUR460 |

NOTE: When ordering, use the entire part number. Add suffix 9A to obtain the TO-252 variant in tape and reel, i.e., RURD460S9A.

Symbol



Features


- Ultrafast with Soft Recovery <55ns
- Operating Temperature. 175°C
- Reverse Voltage 600V
- Avalanche Energy Rated
- Planar Construction

Applications


- Switching Power Supplies
- Power Switching Circuits
- General Purpose

Packaging

JEDEC STYLE TO-251

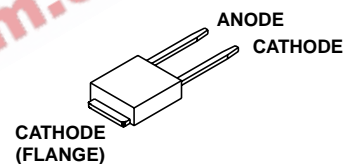

JEDEC STYLE TO-252

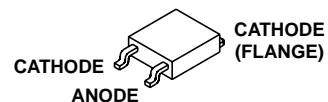

Absolute Maximum Ratings $T_C = 25^\circ\text{C}$, Unless Otherwise Specified

| | RURD460 | RURD460S | UNITS |
|--|----------------|------------|-------|
| Peak Repetitive Reverse Voltage | V_{RRM} | 600 | V |
| Working Peak Reverse Voltage | V_{RWM} | 600 | V |
| DC Blocking Voltage | V_R | 600 | V |
| Average Rectified Forward Current ($T_C = 160^\circ\text{C}$) | $I_{F(AV)}$ | 4 | A |
| Repetitive Peak Surge Current (Square Wave, 20kHz) | I_{FRM} | 8 | A |
| Nonrepetitive Peak Surge Current (Halfwave, 1 phase, 60Hz) | I_{FSM} | 40 | A |
| Maximum Power Dissipation | P_D | 50 | W |
| Avalanche Energy (See Figures 9 and 10) | E_{AVL} | 10 | mJ |
| Operating and Storage Temperature | T_{STG}, T_J | -65 to 175 | °C |
| Maximum Lead Temperature for Soldering | | | |
| Leads at 0.063 in. (1.6mm) from case for 10s | T_L | 300 | °C |
| Package Body for 10s, see Tech Brief 334. | T_{PKG} | 260 | °C |

RURD460, RURD460S

Electrical Specifications $T_C = 25^\circ\text{C}$, Unless Otherwise Specified

| SYMBOL | TEST CONDITION | MIN | TYP | MAX | UNITS |
|-----------------|--|-----|-----|-----|---------------------------|
| V_F | $I_F = 4\text{A}$ | - | - | 1.5 | V |
| | $I_F = 4\text{A}, T_C = 150^\circ\text{C}$ | - | - | 1.2 | V |
| I_R | $V_R = 600\text{V}$ | - | - | 100 | μA |
| | $V_R = 600\text{V}, T_C = 150^\circ\text{C}$ | - | - | 500 | μA |
| t_{rr} | $I_F = 1\text{A}, dI_F/dt = 100\text{A}/\mu\text{s}$ | - | - | 55 | ns |
| | $I_F = 4\text{A}, dI_F/dt = 100\text{A}/\mu\text{s}$ | - | - | 60 | ns |
| t_a | $I_F = 4\text{A}, dI_F/dt = 100\text{A}/\mu\text{s}$ | - | 32 | - | ns |
| t_b | $I_F = 4\text{A}, dI_F/dt = 100\text{A}/\mu\text{s}$ | - | 15 | - | ns |
| Q_{RR} | $I_F = 4\text{A}, dI_F/dt = 100\text{A}/\mu\text{s}$ | - | 50 | - | nC |
| C_J | $V_R = 10\text{V}, I_F = 0\text{A}$ | - | 15 | - | pF |
| $R_{\theta JC}$ | | - | - | 3 | $^\circ\text{C}/\text{W}$ |

DEFINITIONS

V_F = Instantaneous forward voltage ($pw = 300\mu\text{s}$, $D = 2\%$).

I_R = Instantaneous reverse current.

t_{rr} = Reverse recovery time (See Figure 8), summation of $t_a + t_b$.

t_a = Time to reach peak reverse current (See Figure 8).

t_b = Time from peak I_{RM} to projected zero crossing of I_{RM} based on a straight line from peak I_{RM} through 25% of I_{RM} (See Figure 8).

Q_{RR} = Reverse recovery time.

C_J = Junction capacitance.

$R_{\theta JC}$ = Thermal resistance junction to case.

pw = Pulse width.

D = Duty cycle.

Typical Performance Curves

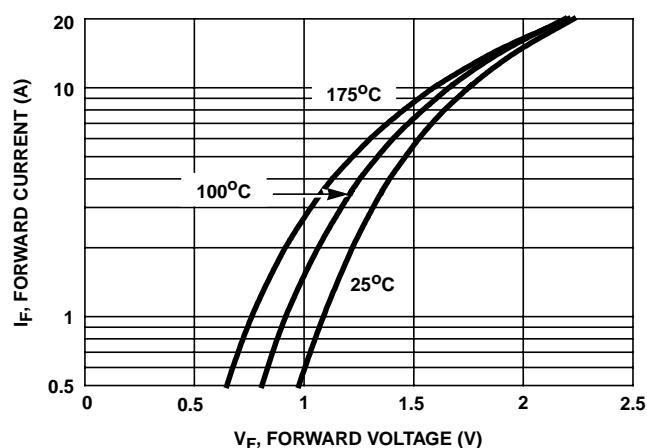


FIGURE 1. FORWARD CURRENT vs FORWARD VOLTAGE

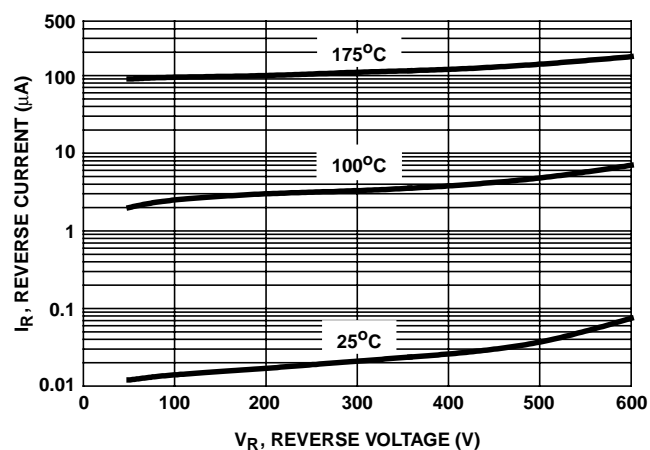


FIGURE 2. REVERSE CURRENT vs REVERSE VOLTAGE

Typical Performance Curves (Continued)

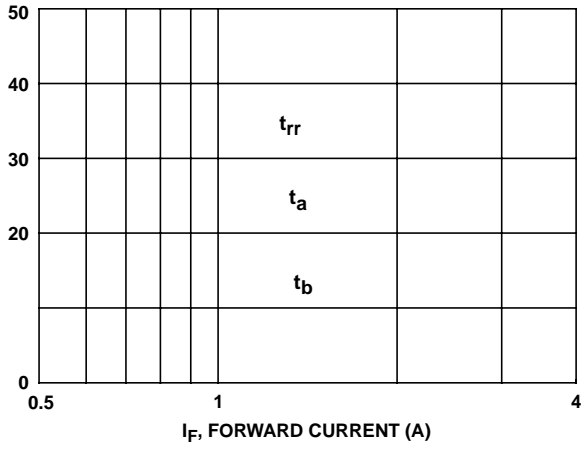


FIGURE 3. t_{rr} , t_a AND t_b CURVES vs FORWARD CURRENT

FIGURE 4. t_{rr} , t_a AND t_b CURVES vs FORWARD CURRENT



FIGURE 5. t_{rr} , t_a AND t_b CURVES vs FORWARD CURRENT

FIGURE 6. CURRENT DERATING CURVE