


SERIAL-INTERFACE REAL TIME CLOCK MODULE

RTC-4543SA/SB

- Built-in crystal unit allows adjustment-free efficient operation.
- Automatic leap year correction.
- Output selectable between 32.768 KHz/1 Hz.
- Operating voltage range: 2.5V to 5.5V.
- Supply voltage detection voltage: $1.7 \pm 0.3V$.
- Low current consumption: $1.0 \mu A/2.0V$ (Max.)

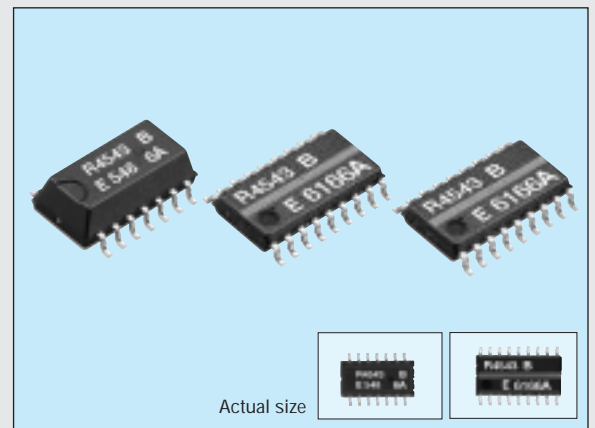

Specifications (characteristics)

Absolute Max. rating

Item	Symbol	Condition	Min.	Max.	Unit
Power source voltage	V_{DD}	$V_{DD}-GND$	-0.3	7.0	V
Input voltage	V_{IN}	—		$V_{DD}+0.3$	
Output voltage	V_{OUT}				
Storage temperature	T_{STG}		-55	+125	$^{\circ}C$

Operating range

Item	Symbol	Condition	Min.	Max.	Unit
Operating voltage	V_{DD}	—	2.5	5.5	V
Date holding voltage	V_{CLK}		1.4		
Operating temperature	T_{OPR}		-40	+85	

Frequency characteristics

Item	Symbol	Condition	Range	Unit
Frequency tolerance	$\Delta f/f_0$	$T_a=25^{\circ}C, V_{DD}=5V$	5 ± 23	ppm
Frequency temperature characteristics	T_{OP}	-10 to $+70^{\circ}C$	$+10/-120$	
Frequency voltage characteristics	f_V	$T_a=25^{\circ}C, V_{DD}=2.0$ to $5.5V$	± 2	ppm/V
Oscillation start time	t_{OSC}	$T_a=25^{\circ}C, V_{DD}=2.5V$	3	s
Aging	f_a	First year $T_a=25^{\circ}C, V_{DD}=5V$	± 5	ppm/year


DC characteristics

($V_{DD}=5V \pm 0.5V, T_a=-40$ to $85^{\circ}C$)

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	
"H" input voltage	V_{IH}	WR, DATA, CE, CLK, F_{OE}, F_{SEL} pins	$0.8V_{DD}$	—	—	V	
"L" input voltage	V_{IL}		$0.2V_{DD}$				
Input off-leak current	I_{OFF}	WR, CE, CLK, F_{OE}, F_{SEL} pins	—	—	0.5	μA	
"H" output voltage	V_{OH1}	$V_{DD}=5.0V$	$I_{OH}=-1.0$ mA	4.5	—	V	
	V_{OH2}	$V_{DD}=3.0V$	DATA, F_{OUT} pins	2.5			
"L" output voltage	V_{OL1}	$V_{DD}=5.0V$	$I_{OH}=1.0$ mA	—	0.5	V	
	V_{OL2}	$V_{DD}=3.0V$	DATA, F_{OUT} pins	—	0.8		
Output leak current	I_{OZH}	$V_{OUT}=5.5V$	DATA, F_{OUT} pins	-1.0	1.0	μA	
	I_{OZL}						$V_{OUT}=0V$
Supply detection voltage	V_{DT}	—	1.4	1.7	2.0	V	
Output load conditions	C_L	F_{OUT} pin	30 pF(max.)		—	V	
	N		2LS-TTL				
Current consumption	1	I_{DD1}	$V_{DD}=5.0V$	CE="L", F_{OE} ="L" F_{SEL} ="H"	1.5	3.0	μA
	2	I_{DD2}	$V_{DD}=3.0V$		1.0	2.0	
	3	I_{DD3}	$V_{DD}=2.0V$		0.5	1.0	
	4	I_{DD4}	$V_{DD}=5.0V$		4.0	10.0	
	5	I_{DD5}	$V_{DD}=3.0V$		2.5	6.5	
	6	I_{DD6}	$V_{DD}=2.0V$		No load on the F_{OUT} pin	1.5	


Terminal connection

RTC-4543SA



No.	4543SA	4543SB
1	GND	N.C
2	N.C	N.C
3	CE	N.C
4	F_{SEL}	N.C
5	WR	F_{OE}
6	F_{OE}	WR
7	N.C	F_{SEL}
8	N.C	CE
9	V_{DD}	GND
10	CLK	F_{OUT}
11	DATA	DATA
12	N.C	CLK
13	N.C	N.C
14	F_{OUT}	V_{DD}
15	—	N.C
16	—	N.C
17	—	N.C
18	—	N.C


RTC-4543SB



External dimensions

(Unit: mm)

RTC-4543SA (SOP 14-pin)

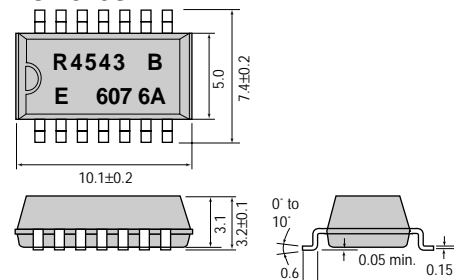

RTC-4543SB (SOP 18-pin)

