

S102T01/S102T02 S202T01/S202T02

■ Features

1. Low height type (height : 16 mm)
30% less compared with S101S05V
2. Effective ON-state current I_T : MAX. 2Ams ($T_a = <= 40^\circ C$)
3. Model Line-ups

	No zero cross circuit	Built-in zero cross circuit
AC100V	S102T01	S102T02
AC200V	S202T01	S202T02


4. Recognized by UL, file No. E94758
Approved by CSA, No. LR63705

■ Applications

1. Programmable controllers
2. Air conditioners
3. Copiers
4. Automatic vending machines


■ Outline Dimensions

(Unit : mm)

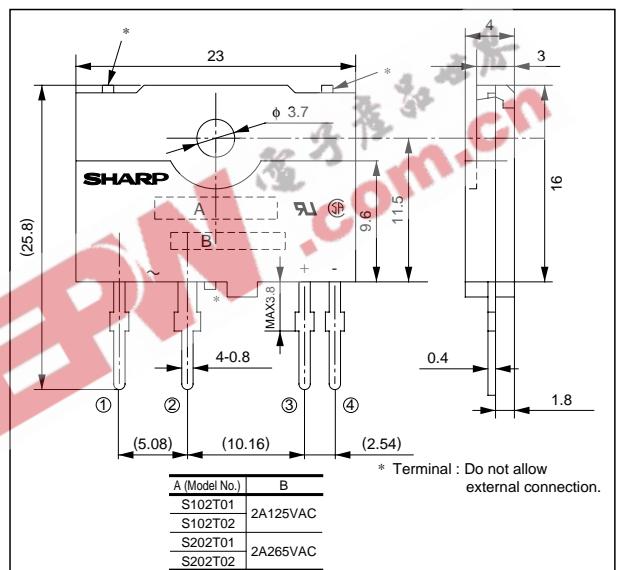


Internal Connection Diagram

S102T01/S202T01



S102T02/S202T02



■ Absolute Maximum ratings

Parameter	Symbol	Rating		Unit
		S102T01 / S102T02	S202T01 / S202T02	
Input	I_F	50		mA
Forward current				
Reverse voltage	V_R	6		V
^{*1} Effective ON-state current	I_T	2		A _{rms}
^{*2} Peak one cycle surge current	I_{surge}	20		A
Output	V_{DRM}	400	600	V
Repetitive peak OFF-state voltage				
Non-repetitive peak OFF-state voltage	V_{DSM}	400	600	V
Critical rate of rise of ON-state current	dI_T/dt	40		A/ μ s
Operating frequency	f	45 to 65		Hz
Operating temperature	T_{opr}	-25 to +100		°C
Storage temperature	T_{stg}	-30 to +125		°C
^{*3} Isolation voltage	V_{iso}	3 000		V _{rms}
Soldering temperature	T_{sol}	260 (For 10 seconds)		°C

^{*1} Refer to Fig. 1. ^{*2} 60Hz sine wave, start at $T_j=25^\circ C$ ^{*3} Isolation voltage test method

1) Use a dielectric withstand voltage tester with zero cross circuit.

2) The applied voltage waveform shall be sine wave.

3) Apply voltage between input and output. (Input and output terminals shall be shorted respectively.)

■ Electro-optical Characteristics

(Ta=25°C)

Parameter		Symbol	Conditions	MIN.	TYPE.	MAX.	Unit
Input	Forward voltage	V _F	I _F = 20mA	-	1.2	1.4	V
	Reverse current	I _R	V _R = 3V	-	-	1 x 10 ⁻⁴	A
Output	Repetitive peak OFF-state current	I _{DRM}	V _D = V _{DRM}	-	-	1 x 10 ⁻⁴	A
	ON-state voltage	V _T	I _T = 2A _{rms} Load resistance, I _F = 20mA	-	-	1.7	V _{rms}
	Holding current	I _H	-	-	-	25	mA
	Critical rate of rise of OFF-state voltage	dV/dt	V _D = 2/3V _{DRM}	30	-	-	V/μs
	Critical rate of rise of OFF-state voltage at commutation	(dV/dt) _c	T _j = 125°C, V _D = 400V dI _t /d t = - 1.0A/ms	4	-	-	V/μs
Transfer characteristics	Minimum trigger current	I _{FT}	*4	-	-	8	mA
	Zero cross voltage	V _{OX}	S102T02/S202T02	-	-	35	V
	Insulation resistance	R _{ISO}	DC500V, 40 to 60% RH	1 x 10 ¹⁰	-	-	Ω
	Turn-on time	t _{on}	S102T01/S202T01	-	-	1	ms
			S102T02/S202T02	-	-	10	ms
Turn-off time		t _{off}	AC50Hz	-	-	10	ms

*4 S102T01/S202T01 V_D=12V,R_L=30Ω
S102T02/S202T02 V_D=6V,R_L=30Ω

Fig. 1 Effective On-state current vs.
Ambient Temperature

