

# S21MD10T

## High Speed, High Sensitivity Type Phototriac Coupler

\* TÜV (DIN-VDE0884) approved type is also available as an option.

### ■ Features


1. High sensitivity ( $I_{FT}$  : MAX. 5mA)
2. High speed (Turn-on time : MAX. 20μs)
3. Long dielectric distance between AC lines (3.9mm)
4. High isolation voltage between input and output (Viso : 5 000Vrms)
5. Recognized by UL, file No. E64380

### ■ Applications

1. For triggering medium/high power triac

### ■ Outline Dimensions

(Unit : mm)

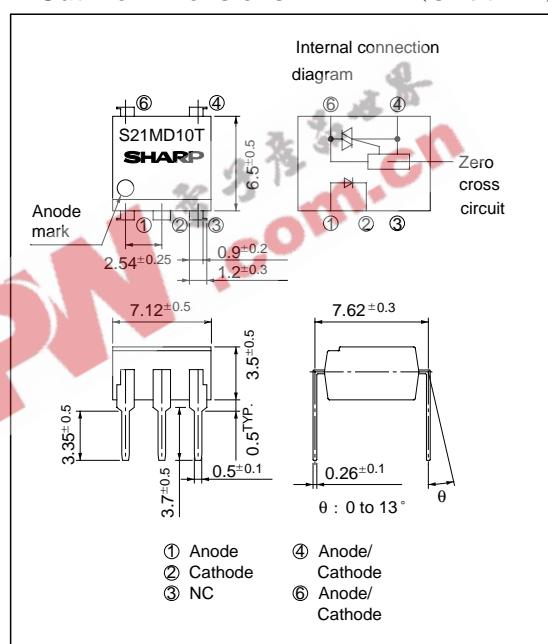

### ■ Absolute Maximum Ratings

(Ta = 25°C)

	Parameter	Symbol	Rating	Unit
Input	Forward current	I <sub>F</sub>	50	mA
	Reverse voltage	V <sub>R</sub>	6	V
Output	RMS ON-state current	I <sub>T</sub>	0.1	A <sub>rms</sub>
	* <sup>1</sup> Peak one cycle surge current	I <sub>surge</sub>	1.2	A
	Repetitive peak OFF-state voltage	V <sub>DRM</sub>	600	V
	* <sup>2</sup> Isolation voltage	V <sub>iso</sub>	5 000	V <sub>rms</sub>
	Operating temperature	T <sub>opr</sub>	- 30 to + 100	°C
	Storage temperature	T <sub>stg</sub>	- 55 to + 125	°C
	* <sup>3</sup> Soldering temperature	T <sub>sol</sub>	260	°C

\*1 50Hz sine wave

\*2 40 to 60% RH, AC for 1 minute, f = 60Hz

\*3 For 10 seconds

## ■ Electro-optical Characteristics

(Ta = 25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V <sub>F</sub>	I <sub>F</sub> = 20mA	-	1.2	1.4	V
	Reverse current	I <sub>R</sub>	V <sub>R</sub> = 3V	-	-	10 <sup>-5</sup>	A
Output	Repetitive peak OFF-state current	I <sub>DRM</sub>	V <sub>DRM</sub> = Rated	-	-	10 <sup>-6</sup>	A
	ON-state voltage	V <sub>T</sub>	I <sub>T</sub> = 0.1A	-	2.0	3.0	V
Transfer-characteristics	Holding current	I <sub>H</sub>	V <sub>D</sub> = 6V	0.1	0.5	3.5	mA
	Critical rate of rise of OFF-state voltage	dV/dt	V <sub>DRM</sub> = (1/2) • Rated	100	-	-	V/μs
Zero-cross voltage		V <sub>OX</sub>	Resistance load, I <sub>F</sub> = 10mA	-	-	35	V
Transfer-characteristics	Minimum trigger current	I <sub>FT</sub>	V <sub>D</sub> = 6V, R <sub>L</sub> = 100Ω	-	-	5	mA
	Isolation resistance	R <sub>ISO</sub>	DC500V, 40 to 60% RH	5 × 10 <sup>10</sup>	10 <sup>11</sup>	-	Ω
	Turn-on time	t <sub>on</sub>	V <sub>D</sub> = 6V, R <sub>L</sub> = 100Ω, I <sub>F</sub> = 20mA	-	-	20	μs

Fig. 1 RMS ON-state Current vs.  
Ambient Temperature

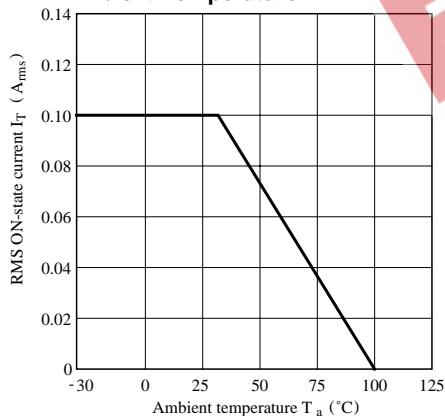


Fig. 2 Forward Current vs.  
Ambient Temperature

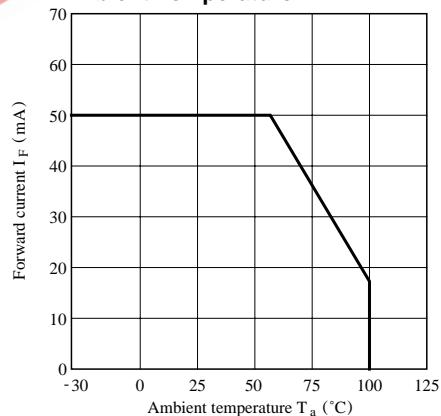


Fig. 3 Forward Current vs. Forward Voltage



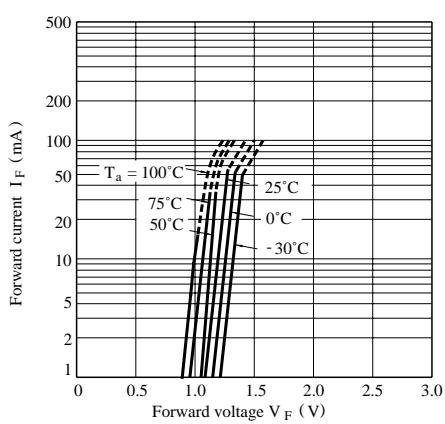



Fig. 4 Minimum Trigger Current vs.  
Ambient Temperature

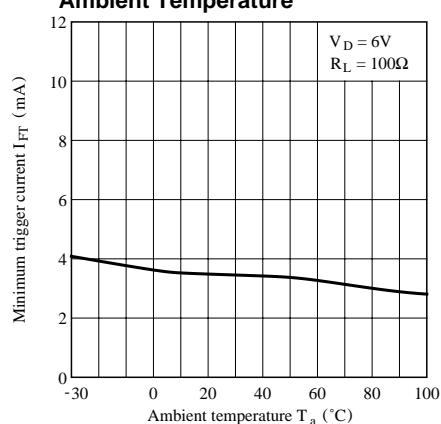


**Fig. 5 Relative Repetitive Peak OFF-state Voltage vs. Ambient Temperature**

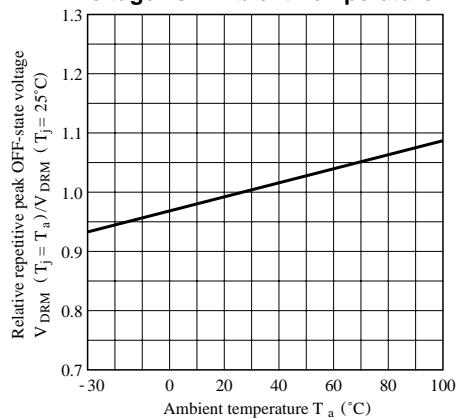


**Fig. 6 ON-state Voltage vs. Ambient Temperature**

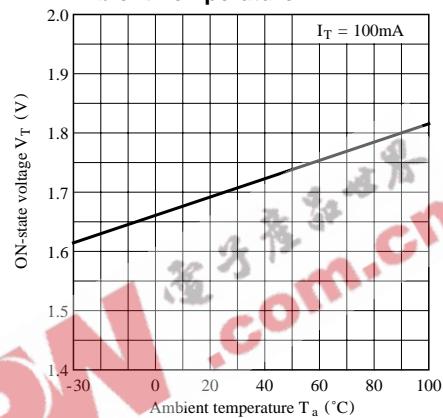


**Fig. 7 Holding Current vs. Ambient Temperature**

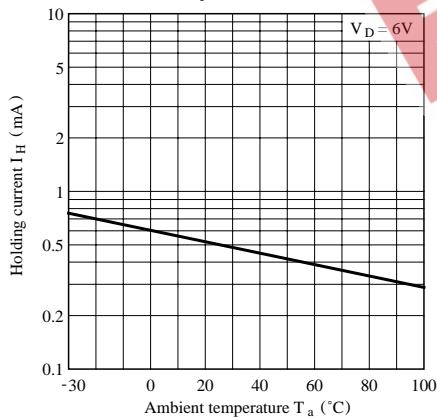


**Fig. 8 Repetitive Peak OFF-State Current vs. OFF-State Voltage**


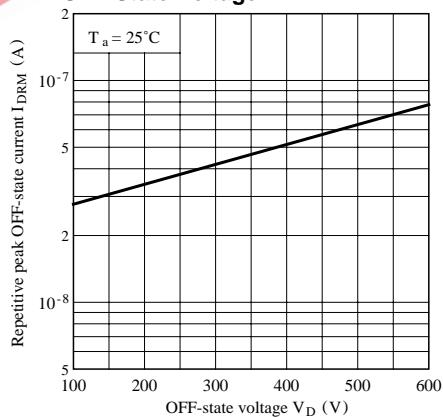


**Fig. 9 Repetitive Peak OFF-state Current vs. Ambient Temperature**

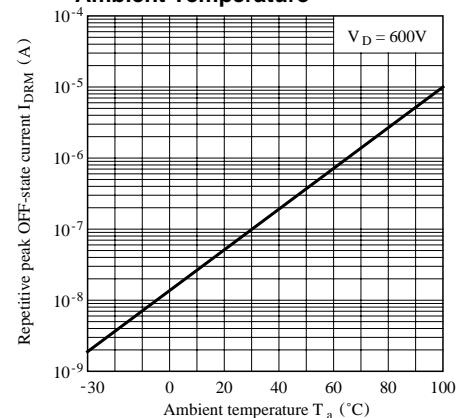


**Fig. 10 Zero-cross Voltage vs. Ambient Temperature**

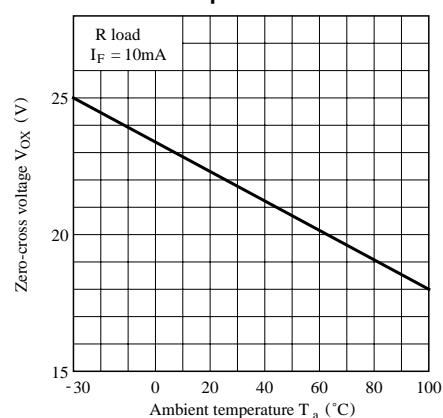

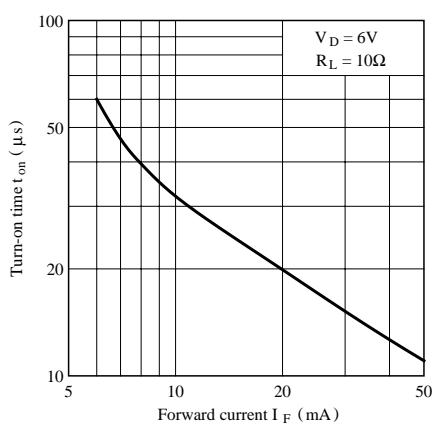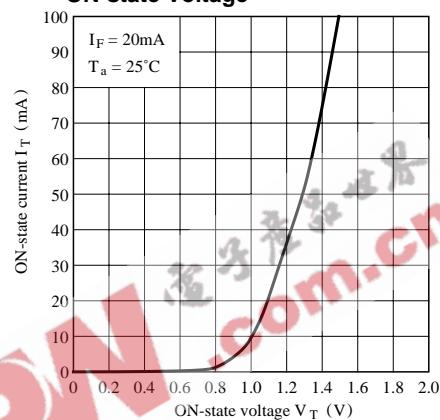**Fig.11 Turn-on Time vs. Forward Current****Fig.12 ON-state Current vs. ON-state Voltage**

### ■ Basic Operation Circuit

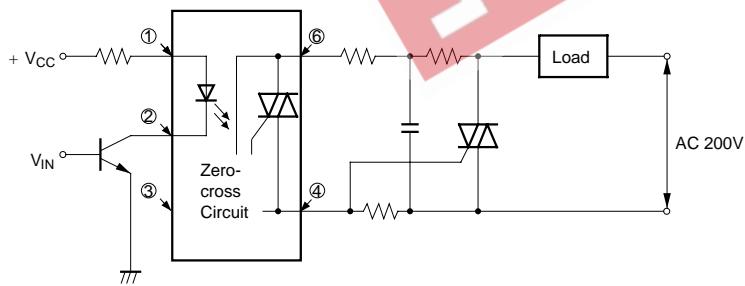

- Please refer to the chapter “Precautions for Use”