

S11MS3/ S21MS3/S21MS4

High Density Surface Mount Type Mini-flat Package Phototriac Coupler

■ Features

1. Ultra-compact, mini-flat package type (3.6 x 4.4 x 2.0mm)
2. Built-in zero-cross circuit (S21MS4)
3. High isolation voltage between input and output (V_{iso} : 3 750V_{rms})
4. Recognized by UL, file No.E64380

■ Model Line-ups


	For 100V lines	For 200V lines
No built-in zero-cross circuit	S11MS3	S21MS3
Built-in zero-cross circuit	-	S21MS4

■ Applications

1. For triggering of medium/high power triacs

■ Outline Dimensions

(Unit : mm)

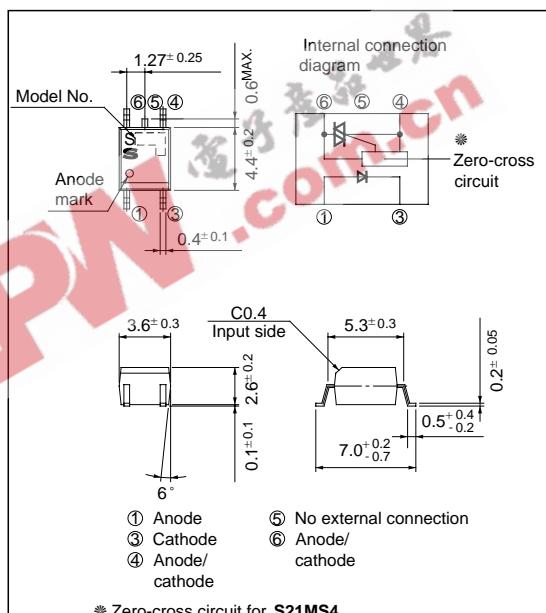

■ Absolute Maximum Ratings

(Ta = 25°C)



Parameter	Symbol	Rating		Unit
		S11MS3	S21MS3/S21MS4	
Input	Forward current	I _F	50	mA
	Reverse voltage	V _R	6	V
Output	*1 RMS ON-state current	I _T	0.05	A _{rms}
	*2 Peak one cycle surge current	I _{surge}	0.6	A
	Repetitive peak OFF-state voltage	V _{DRM}	400 600	V
	*3 Isolation voltage	V _{iso}	3 750	V _{rms}
	Operating temperature	T _{opr}	- 30 to +100	°C
	Storage temperature	T _{stg}	- 40 to +125	°C
	*4 Soldering temperature	T _{sol}	260	°C

*1 The definition of conduction angle θ of effective ON current I_T should be as shown in the right drawing.

*2 50Hz sine wave

*3 40 to 60% RH, AC for 1 minute

*4 For 10 seconds,

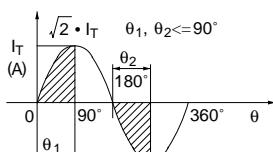

SHARP**S11MS3/S21MS3/S21MS4****■ Electro-optical Characteristics**

(Ta= 25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V _F	I _F = 20mA	-	1.2	1.4	V
	Reverse current	I _R	V _R = 3V	-	-	10	µA
Output	Repetitive peak OFF-state current	I _{DRM}	V _{DRM} = Rated	-	-	1	µA
	ON-state voltage	V _T	I _T = 0.05A	-	-	2.5	V
	Holding current	I _H	V _D = 6V	0.1	-	3.5	mA
	Critical rate of rise of OFF-state voltage	dV/dt	V _{DRM} = 1/4 $\sqrt{2}$ • Rated	100	1 000	-	V/µs
Transfer characteristics	Zero-cross voltage S21MS4	V _{OX}	I _F = 15mA, Resistance load	-	-	35	V
	Minimum trigger current	I _{FT}	V _D = 6V, R _L = 100Ω	-	-	10	mA
	Isolation resistance	R _{ISO}	DC500V, 40 to 60% RH	5 x 10 ¹⁰	10 ¹¹	-	Ω
	Turn-on time S11MS3/S21MS3 S21MS4	t _{on}	V _D = 6V, R _L = 100Ω, I _F = 20mA	-	-	100	µs
				-	-	50	

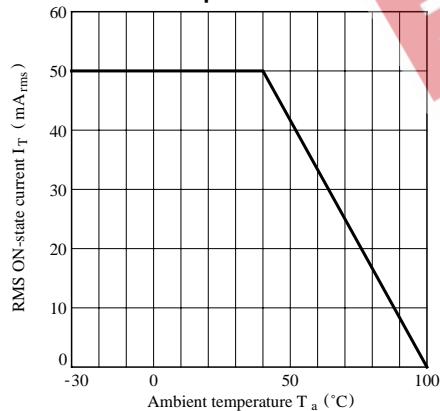
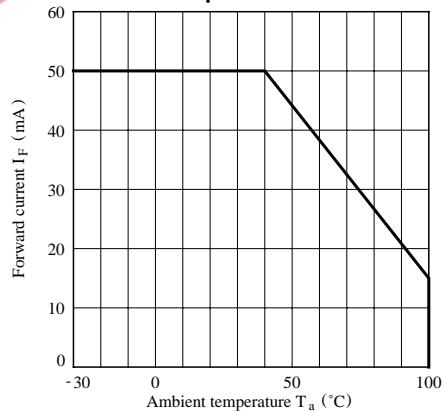
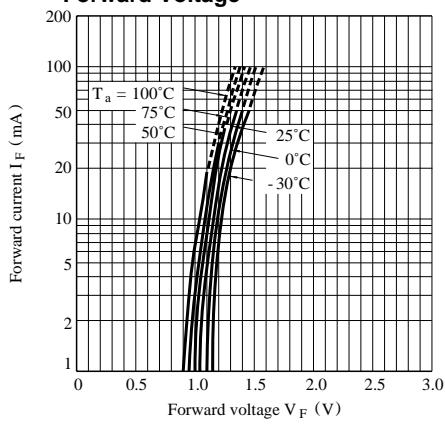
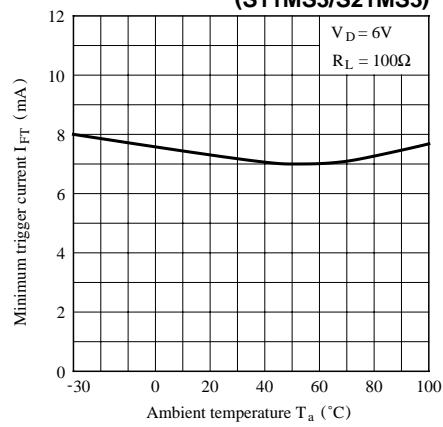
**Fig. 1 RMS ON-state Current vs.
Ambient Temperature****Fig. 2 Forward Current vs.
Ambient Temperature****Fig. 3 Forward Current vs.
Forward Voltage****Fig. 4-a Minimum Trigger Current vs.
Ambient Temperature
(S11MS3/S21MS3)**

Fig. 4-b Minimum Trigger Current vs. Ambient Temperature (S21MS4)

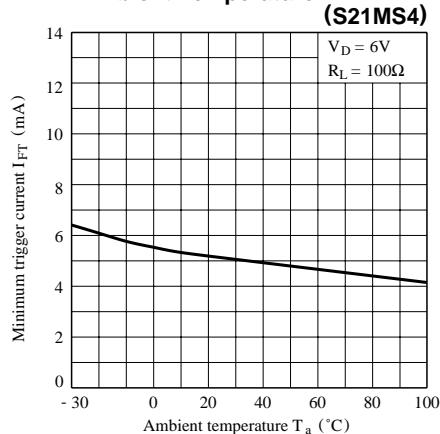


Fig. 5-a Relative Repetitive Peak OFF-state Voltage vs. Ambient Temperature (S11MS3/S21MS3)

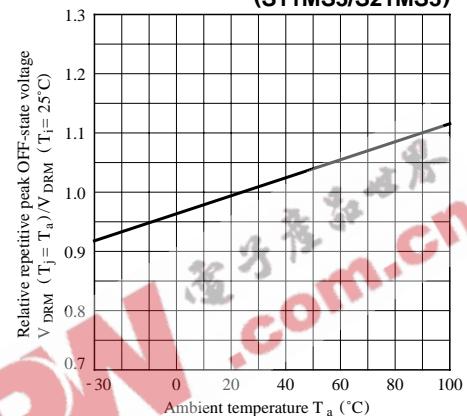


Fig. 5-b Relative Repetitive Peak OFF-state Voltage vs. Ambient Temperature (S21MS4)

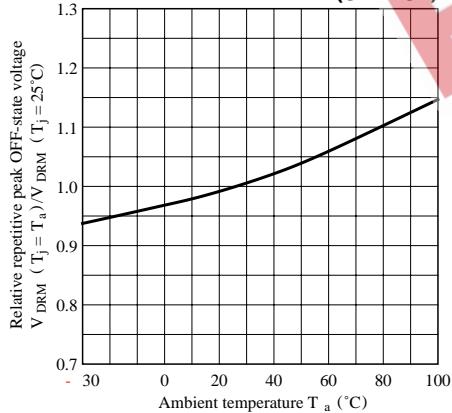


Fig. 6 ON-state Voltage vs. Ambient Temperature

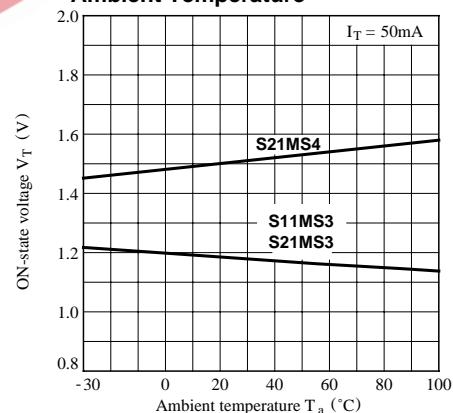


Fig. 7-a Holding Current vs. Ambient Temperature (S11MS3/S21MS3)


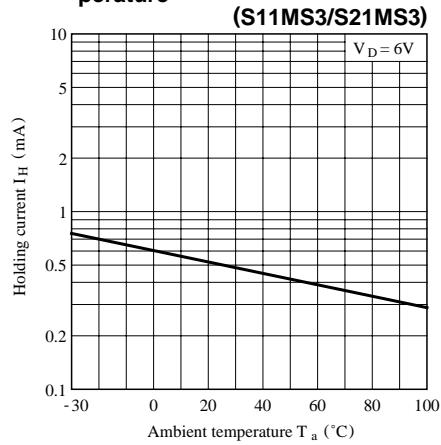


Fig. 7-b Holding Current vs. Ambient Temperature (S21MS4)

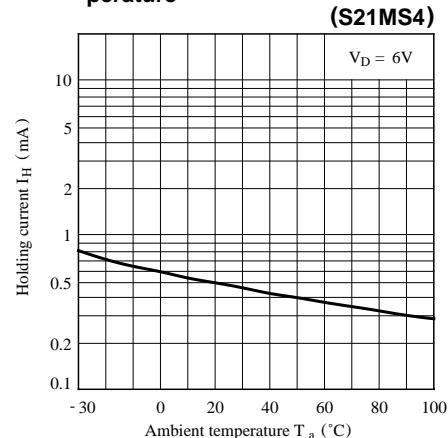

SHARP

S11MS3/S21MS3/S21MS4

Fig. 8-a Repetitive Peak OFF-state Current vs. OFF-state Voltage (S11MS3)

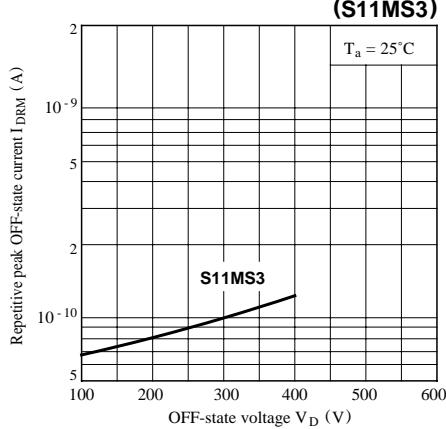


Fig. 8-b Repetitive Peak OFF-state Current vs. OFF-state Voltage (S21MS3/S21MS4)



Fig. 9 Relative Repetitive Peak OFF-state Current vs. Ambient Temperature

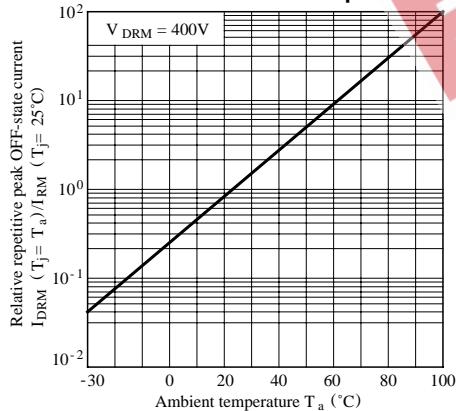


Fig. 10 Zero-cross Voltage vs. Ambient Temperature (S21MS4)



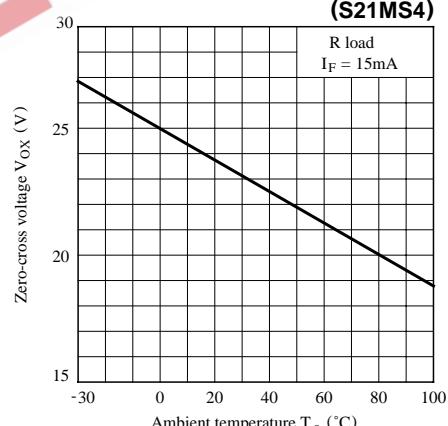


Fig.11 ON-state Current vs. ON-state Voltage

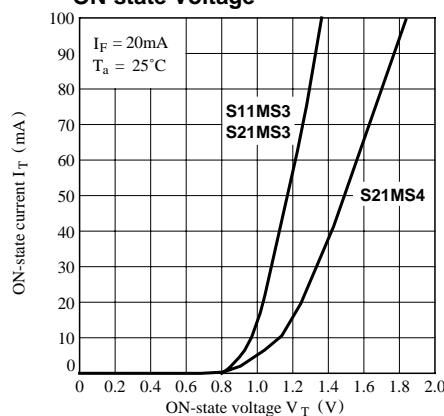

■ Basic Operation Circuit

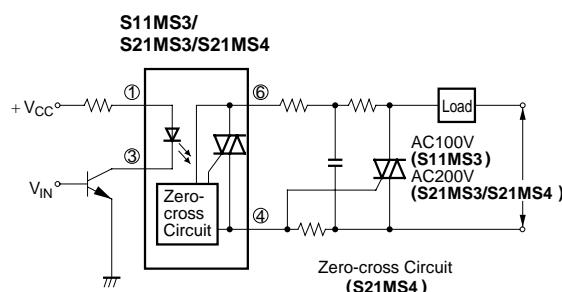

● Please refer to the chapter
“Precautions for Use.” (Page 78 to 93).