


Schottky Barrier Rectifiers

Using the Schottky Barrier principle with a Molybdenum barrier metal. These state-of-the-art geometry features epitaxial construction with oxide passivation and metal overlay contact. Ideally suited for low voltage, high frequency rectification, or as free wheeling and polarity protection diodes.

- * Low Forward Voltage.
- * Low Switching noise.
- * High Current Capacity
- * Guarantee Reverse Avalanche.
- * Guard-Ring for Stress Protection.
- * Low Power Loss & High efficiency.
- * 150 Operating Junction Temperature
- * Low Stored Charge Majority Carrier Conduction.
- * Plastic Material used Carries Underwriters Laboratory Flammability Classification 94V-O

SCHOTTKY BARRIER RECTIFIERS


**16 AMPERES
30-60 VOLTS**



TO-220AB

MAXIMUM RATINGS


| Characteristic | Symbol | S16C | | | | | | Unit |
|--|---------------------------------|-------------|------|------|------|------|------|------|
| | | 30CE | 35CE | 40CE | 45CE | 50CE | 60CE | |
| Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage | V_{RRM} V_{RWM} V_R | 30 | 35 | 40 | 45 | 50 | 60 | V |
| RMS Reverse Voltage | $V_{R(RMS)}$ | 21 | 25 | 28 | 32 | 35 | 42 | V |
| Average Rectifier Forward Current Total Device (Rated V_R , $T_C=100$) | $I_{F(AV)}$ | 8.0 16 | | | | | | A |
| Peak Repetitive Forward Current (Rate V_R , Square Wave, 20kHz) | I_{FM} | 16 | | | | | | A |
| Non-Repetitive Peak Surge Current (Surge applied at rate load conditions halfwave, single phase, 60Hz) | I_{FSM} | 150 | | | | | | A |
| Operating and Storage Junction Temperature Range | T_J, T_{stg} | -65 to +150 | | | | | | |



| DIM | MILLIMETERS | |
|-----|-------------|-------|
| | MIN | MAX |
| A | 14.68 | 15.32 |
| B | 9.78 | 10.42 |
| C | 5.02 | 6.52 |
| D | 13.06 | 14.62 |
| E | 3.57 | 4.07 |
| F | 2.42 | 2.66 |
| G | 1.12 | 1.36 |
| H | 0.72 | 0.96 |
| I | 4.22 | 4.98 |
| J | 1.14 | 1.38 |
| K | 2.20 | 2.98 |
| L | 0.33 | 0.55 |
| M | 2.48 | 2.98 |
| O | 3.70 | 3.90 |

ELECTRIAL CHARACTERISTICS

| Characteristic | Symbol | S16C | | | | | | Unit |
|--|--------|--------------|------|------|--------------|------|------|------|
| | | 30CE | 35CE | 40CE | 45CE | 50CE | 60CE | |
| Maximum Instantaneous Forward Voltage ($I_F=8.0$ Amp $T_C=25$) ($I_F=8.0$ Amp $T_C=125$) | V_F | 0.57 0.48 | | | 0.70 0.58 | | V | |
| Maximum Instantaneous Reverse Current (Rated DC Voltage, $T_C=25$) (Rated DC Voltage, $T_C=125$) | I_R | 0.5 20 | | | | | mA | |



Common cathode
Suffix "C"

S16C30CE Thru S16C60CE

FIG-1 FORWARD CURRENT DERATING CURVE

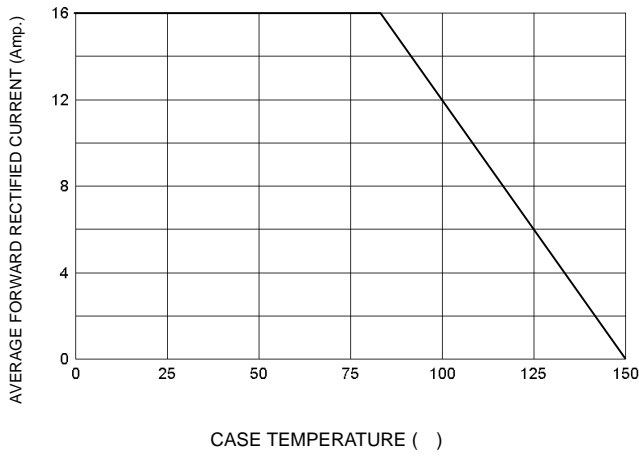


FIG-2 TYPICAL FORWARD CHARACTERISTICS

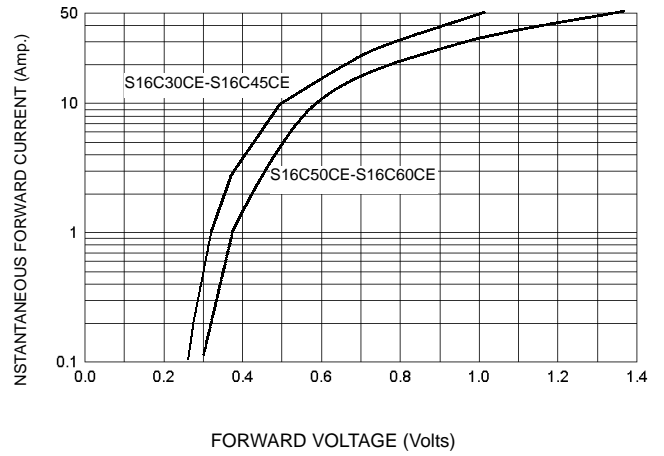


FIG-3 TYPICAL REVERSE CHARACTERISTICS

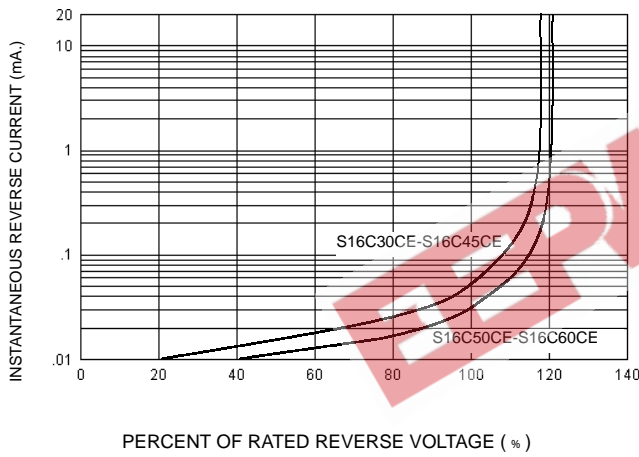


FIG-4 TYPICAL JUNCTION CAPACITANCE

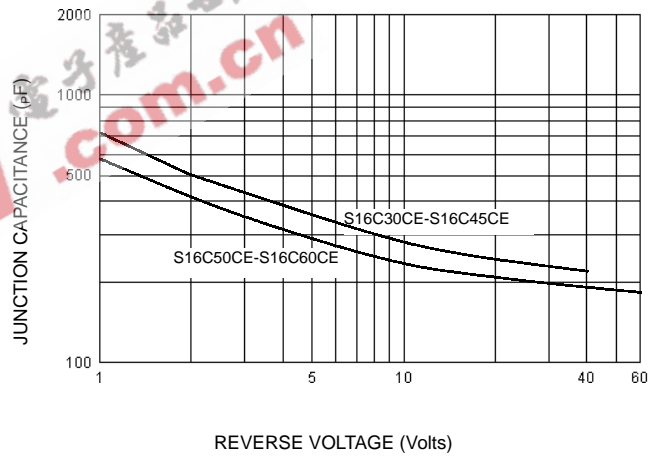


FIG-5 PEAK FORWARD SURGE CURRENT

