



GOOD-ARK

SB120 THRU SB1B0

SCHOTTKY BARRIER RECTIFIER


Reverse Voltage - 20 to 100 Volts

Forward Current - 1.0 Ampere

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Flame retardant epoxy molding compound
- 1.0 ampere operation at $T_L=90^\circ\text{C}$ with no thermal runaway
- For use in low voltage, high frequency inverters free wheeling, and polarity protection applications

DO-41

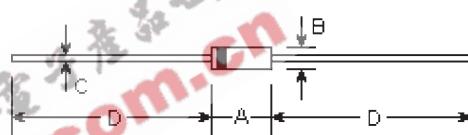

Mechanical Data

- Case:** Molded plastic, DO-41
- Terminals:** Axial leads, solderable per MIL-STD-202, method 208
- Polarity:** Color band denotes cathode
- Mounting Position:** Any
- Weight:** 0.012 ounce, 0.33 gram

DIM	inches		mm		Note
	Min.	Max.	Min.	Max.	
A	0.165	0.205	4.2	5.2	
B	0.079	0.106	2.0	2.7	Φ
C	0.028	0.034	0.71	0.86	Φ
D	1.000	-	25.40	-	

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

	Symbols	SB120	SB130	SB140	SB150	SB160	SB170	SB180	SB190	SB1B0	Units				
Maximum repetitive peak reverse voltage	V_{RRM}	20	30	40	50	60	70	80	90	100	Volts				
Maximum RMS voltage	V_{RMS}	14	21	28	35	42	49	56	63	70	Volts				
Maximum DC blocking voltage	V_{DC}	20	30	40	50	60	70	80	90	100	Volts				
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_L=90^\circ\text{C}$	$I_{(AV)}$	1.0						Amp							
Peak forward surge current, I_{FSM} (surge): 8.3mS single half sine-wave superimposed on rated load (MIL-STD-750D 4066 method)	I_{FSM}	30.0						Amps							
Maximum forward voltage at 1.0A	V_F	0.55		0.70		0.85		Volts							
Maximum full load reverse current, full cycle average at $T_A=75^\circ\text{C}$	$I_{R(AV)}$	30.0						mA							
Maximum DC reverse current at rated DC blocking voltage $T_A=25^\circ\text{C}$ $T_A=100^\circ\text{C}$	I_R	1.0 10.0						mA							
Typical junction capacitance (Note 1)	C_J	110.0						pF							
Typical thermal resistance (Note 2)	$R_{(t)JA}$	80.0						°C/W							
Operating and storage temperature range	T_J T_{STG}	-50 to +125						°C							

Notes:

(1) Measured at 1.0MHz and applied reverse voltage of 4.0 VDC

(2) Thermal resistance junction to ambient

RATINGS AND CHARACTERISTIC CURVES

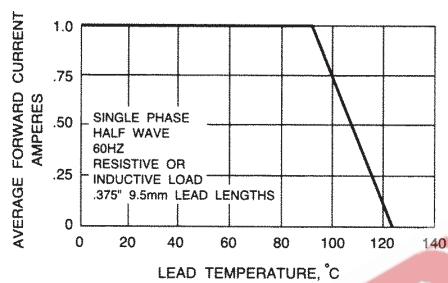


Fig. 1 – FORWARD CURRENT DERATING CURVE

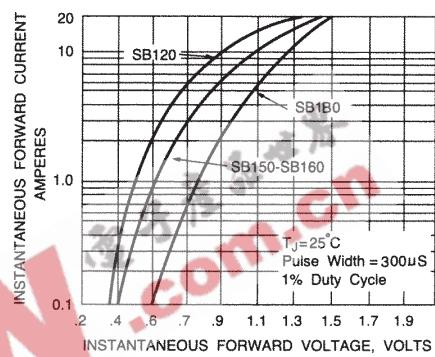


Fig. 2 – TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

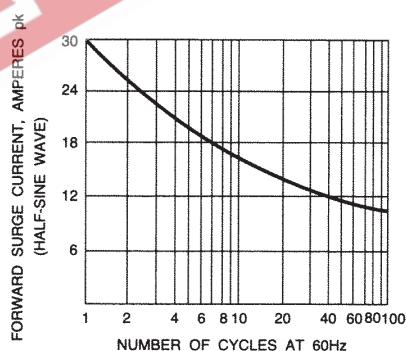


Fig. 3 – MAXIMUM NON-REPETITIVE SURGE CURRENT

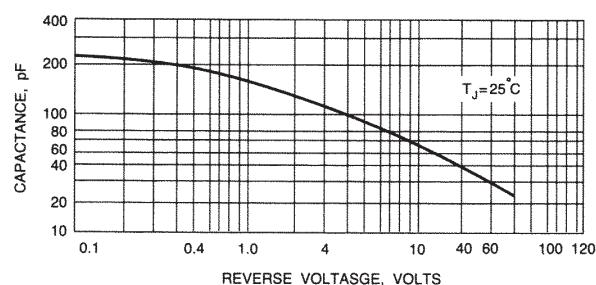


Fig. 4 – TYPICAL JUNCTION CAPACITANCE