



# SD101AW THRU SD101CW

## Schottky Barrier Switching Diode



Voltage Range  
40 to 60 Volts  
400m Watts Power Dissipation


### Features

- ✧ Low forward voltage drop
- ✧ Guard ring construction for transient protection
- ✧ Negligible reverse recovery time

### Mechanical Data

- ✧ Case: SOD-123, plastic
  - ✧ Polarity: Cathode band
  - ✧ Terminals: Solderable per MIL-STD-202, Method 208
  - ✧ Marking: Date Code and Type Code or Date Code only
- Type Code: SD101AW S1  
SD101BW S2  
SD101CW S3
- ✧ Weight: 0.01 grams (approx.)

### SOD-123



Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

#### Maximum Ratings

Type Number	Symbol	SD101AW	SD101BW	SD101CW	Units
Peak Repetitive Reverse Voltage	VRRM				
Working Peak Reverse Voltage	VRWM	60	50	40	V
DC Blocking Voltage	VR				
RMS Reverse Voltage	VR(RMS)	42	35	28	V
Forward Continuous Current (Note 1)	IFM		15		mA
Non-repetitive Peak Forward Surge Current @ t ≤ 1.0s @ t = 10μs	IFSM		50 2.0		mA A
Power Dissipation (Note 1)	Pd		400		mW
Thermal Resistance Junction to Ambient Air (Note 1)	R θ JA		300		°C /W
Operating and Storage Temperature Range	TJ, TSTG		-65 to + 125		°C

#### Electrical Characteristics

Type Number	Symbol	Min	Max	Units
Reverse Breakdown Voltage (Note 2) SD101AW IR=10uA SD101BW IR=10uA SD101CW IR=10uA	V(BR)	60 50 40	-	V
Peak Reverse Current SD101AW VR=50V SD101BW VR=40V SD101CW VR=30V	IR	-	200	nA
Forward Voltage Drop (Note 2) SD101AW IF=1.0mA SD101BW IF=1.0mA SD101CW IF=1.0mA SD101AW IF=15mA SD101BW IF=15mA SD101CW IF=15mA	VF	-	0.41 0.40 0.39 1.00 0.95 0.90	V
Junction Capacitance VR=0, f=1.0MHz SD101AW SD101BW SD101CW	Cj	-	2.0 2.1 2.2	Pf
Reverse Recovery Time IF=IR=5.0mA Irr=0.1 x IR, RL=100Ω	trr	-	1.0	nS

Notes: 1. Valid Provided that Terminals are Kept at Ambient Temperature.

2. Pulse Test: Pulse width = 300μs, Duty cycle ≤ 2%.

RATINGS AND CHARACTERISTIC CURVES (SD101AW - SD101CW)

FIG.1- TYPICAL FORWARD CHARACTERISTIC VARIATIONS FOR PRIMARY CONDUCTION

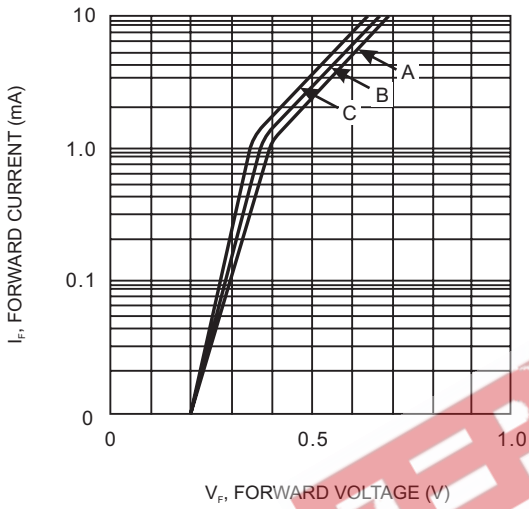


FIG.2- TYP. JUNCTION CAPACITANCE VS REVERSE VOLTAGE

