


Part Number: SL12 10004

### Ordering Different Lead Types:

Inside Kinked Leads	Use <b>-A</b> after Ametherm's part #
Outside Kinked Leads	Use <b>-B</b> after Ametherm's part #

For example: to order an inside kinked lead use part number SL12 10004-A

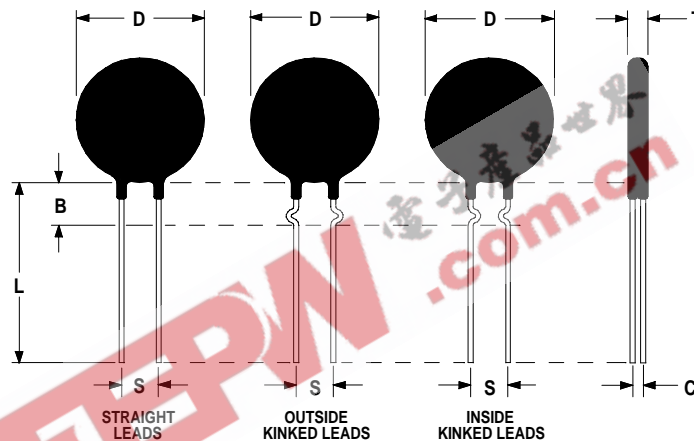

### Electrical Specifications:

Resistance @ 25°C	10.0 Ω ± 20%
Max Steady State Current Up to 65°C	4.0 A
Max Recommended Energy Rating (Joules)	40.0 J
Actual Failure Point of Instantaneous Energy (Joules)	80.0 J
Resistance @ 100% of Max Current	0.190 Ω
Resistance @ 50% of Max Current	0.478 Ω
Body Temperature @ 100% Current Rating	162 °C
Dissipation Constant	12.7mW/°C
Thermal Time Constant	47 seconds
Material Type	"C"
Max Recommended Capacitance @ 120VAC/240VAC	2700μF/ 690μF

### Mechanical Specifications:

D	12.0 ± 0.5 mm
T	7.0 mm Max
Lead Diameter	0.8 ± 0.1 mm
S	7.8 ± 2.0 mm
L	38.0 ± 9.0 mm
Inside Kink Dimension	See Dimension B Below
B	6.35 ± 0.60 mm
C	2.82 ± 0.5 mm