



defining a degree of excellence

Type SMP

Surface Mount Power Cross Protection Fuse

SMPD0104



SMP Surface Mount Power Cross Protection Fuses are primarily intended for use in telecommunication circuit applications requiring low current protection with high surge tolerance. They are typically used to replace heat coil type devices. They are designed to be placed between the line input and the surge arresting components (mov, gas tube, zenor diode, air gaps, etc.)

These fuses will withstand transient surge currents generated by lightning in accordance with the attached table.

SMP Fuses guard protected circuitry against sustained overload or short circuit conditions. Such sustained overloads may be generated by accidental contact between utility cables and phone lines (power line cross).

SMP Fuse are used in circuits to obtain compliance with the test requirements specified in UL 1950/60950 and Bellcore GR 1089.

Electrical Characteristics (UL STD. 248-14)

Testing current	Blow Time	
	Minimum	Maximum
100%	4 hrs.	N/A
200%	3 sec	60 sec
500%	100 msec	1.5 sec
1000%	30 msec	300 msec

Approvals

Safety Agency Approvals	Interrupting Rating	Power Factor	Intended Application
Recognized File no. E20624	60A@ 600V AC	Resistive	Telecom Protection
	100A@ 125V DC	Resistive	General Purpose

Environmental Specification

Soldering Techniques & Compatibility

Reflow: Industrial standard, 240°C peak

Shock

MIL-STD-202, Method 213, Test Condition I (100 G's peak for 6 milliseconds)

Vibration

MIL-STD-202, Method 201 (10-55 Hz, 0.06 inch, total excursion)

Salt Spray

MIL-STD-202, Method 101, Test condition B (48 hrs)

Insulation Resistance

MIL-STD-202, Method 302, Test Condition A (After Opening) 10,000 ohms minimum

Solderability

MIL-STD-202, Method 208

Resistance to solder Heat

MIL-STD-202, Method 210, Test Condition J (235°C, 30 sec)

Catalog Number	Ampere Rating	Voltage Rating	Typical Cold Resistance (ohm)	Volt-drop @100% In (Volt) max.	Melting IPT < 10 mSec (A ² Sec)	Melting IPT @ 10 In (A ² Sec)	Peak Surge Current (Amp) 50 Pulses 1,000V 10 uS x 1000 uS	Peak Surge Current (Amp) 10 Pulses 1,000V 10 uS x 1000 uS	Maximum Power Dissipation (W)
SMP 500	500mA	600V	0.350	0.28	1.4	1.8	25	35	0.25
SMP 1.25	1.25A	600V	0.090	0.18	14	17	100	N/A	0.40

Consult manufacturer for other ratings


SMP 1.25 Surge Withstand Ratings

Voltage	Peak Surge Current	Maximum Rise/Duration Time	Repetitions
1000V	100A	10 uS x 1000 uS	100 Pulses (50 Each Polarity)
2500V	500A	2 uS x 10 uS	40 Pulses (20 Each Polarity)
5000V	500A	2 uS x 10 uS	4 Pulses (2 Each Polarity)

Power Cross (Telecom) Rating (Fuse Rated 0.1-1.5A)

Overload Current	Voltage	Clearing Time Limit	
		1.25A	500mA
200% Fuse Rating	600V	max. 60 sec	max. 60 sec
2.2A	600V	max. 15 min	max. 2 min
7A	600V	max. 1 sec	max. 100msec
40A	600V	max. 50 msec	max. 30 msec
60A	600V	max. 20 msec	max. 20 msec

Double-exponential Impulse Waveform



Thermal Shock

MIL-STD-202, Method 107, Test Condition B (-65°C to +125°C)

Operating Temperature

-55°C to +125°C

Physical Specification

Materials

Ceramic Body / Tin Plated Brass Caps
Lead Free Solder

Marking


On fuse: "bel", "Current Rating"

On label: Above info; "Type", "Voltage Rating", "Appropriate Safety Logos"
Interrupting Rating plus "CE"

Packaging

2,000 fuses in 13 inches dia. reel, 16 mm wide tape, 8 mm pitch, per EIA standard 481


Mechanical Dimensions

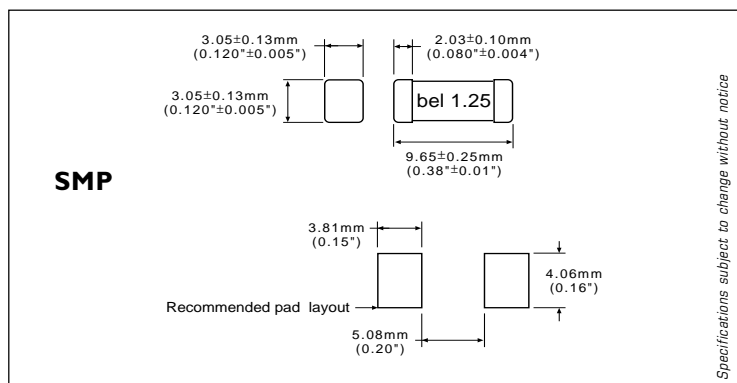

ORDERING INFORMATION SEE PAGES 67 & 68

Type SMP
Surface Mount Power Cross Protection Fuse

SMP - TIME CURRENT CHARACTERISTIC CURVE

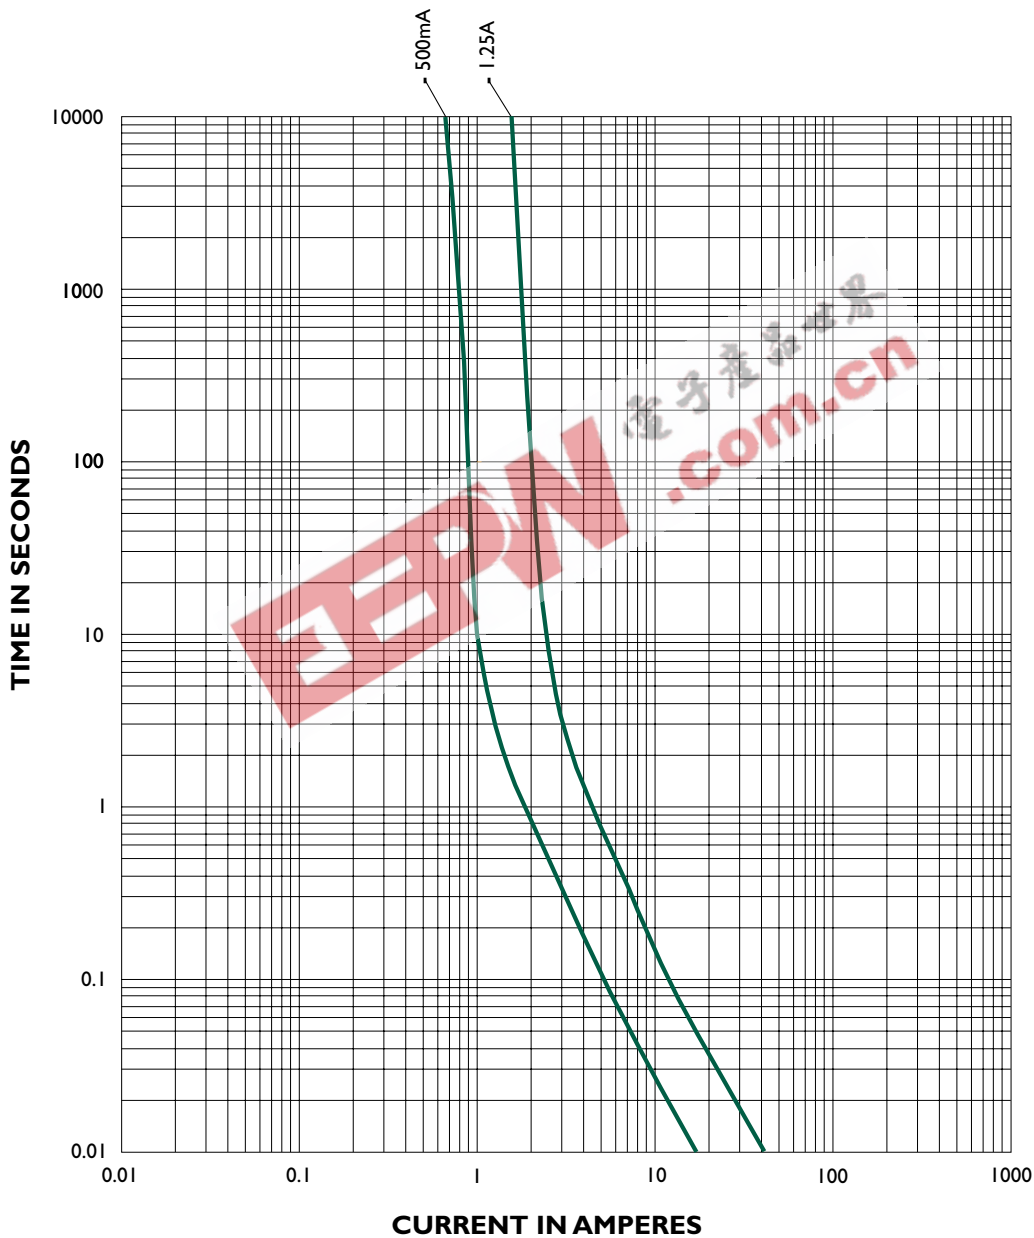

Specifications subject to change without notice

NOTE - see important information under "User Guide" on P.08

Corporate Office
Bel Fuse Inc.
 206 Van Vorst Street, Jersey City, NJ 07302
 Tel: 201-432-0463
 Fax: 201-432-9542
 E-Mail: belfuse@belfuse.com
 Website: www.belfuse.com

Far East Office
Bel Fuse Ltd.
 8F/8 Luk Hop Street
 San Po Kong
 Kowloon, Hong Kong
 Tel: 852-2328-5515
 Fax: 852-2352-3706

European Office
Bel Fuse Europe Ltd.
 Preston Technology Management Centre
 Marsh Lane, Preston PR1 8UD
 Lancashire, U.K
 Tel: 44-1772-556601
 Fax: 44-1772-888366