


SS12 THRU SS16

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 60 Volts

Forward Current - 1.0 Ampere

DO-214AC

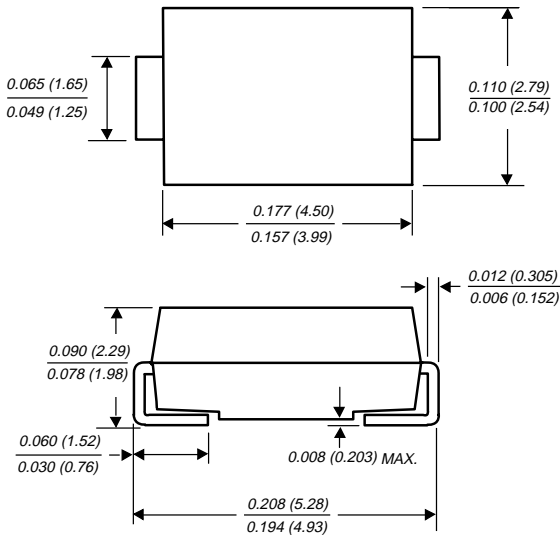

Dimensions in inches and (millimeters)

FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability classification 94V-0
- ◆ For surface mount applications
- ◆ Low profile package
- ◆ Built-in strain relief
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ High current capability, low forward voltage drop
- ◆ High surge capability
- ◆ For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- ◆ Guardring for overvoltage protection
- ◆ High temperature soldering guaranteed: 250°C/10 seconds on terminals



MECHANICAL DATA

Case: JEDEC DO-214AC molded plastic body

Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Weight: 0.002 ounce 0.064 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	SS12	SS13	SS14	SS15	SS16	UNITS
Device marking code		S2	S3	S4	S5	S6	
Maximum repetitive peak reverse voltage	V_{RRM}	20	30	40	50	60	Volts
Maximum RMS voltage	V_{RMS}	14	21	28	35	42	Volts
Maximum DC blocking voltage	V_{DC}	20	30	40	50	60	Volts
Maximum average forward rectified current at T_L (SEE FIG. 1)	$I_{(AV)}$	1.0					Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	40.0					Amps
Maximum instantaneous forward voltage at 1.0A (NOTE 1)	V_F	0.50			0.75		Volts
Maximum DC reverse current (NOTE 1) at rated DC blocking voltage	I_R	0.2					mA
		6.0			5.0		
Typical thermal resistance (NOTE 2)	$R_{\theta JA}$ $R_{\theta JL}$	88.0 28.0					°C/W
Operating junction temperature range	T_J	-65 to +125			-65 to +150		°C
Storage temperature range	T_{STG}	-65 to +150					°C

NOTES:

(1) Pulse test: 300µs pulse width, 1% duty cycle

(2) P.C.B. mounted with 0.2 x 0.2" (5.0 x 5.0mm) copper pad areas

RATINGS AND CHARACTERISTIC CURVES SS12 THRU SS16

FIG. 1 - FORWARD CURRENT DERATING CURVE

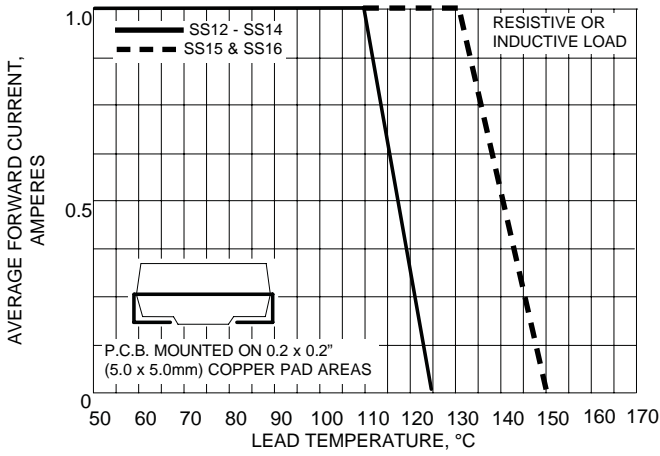


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

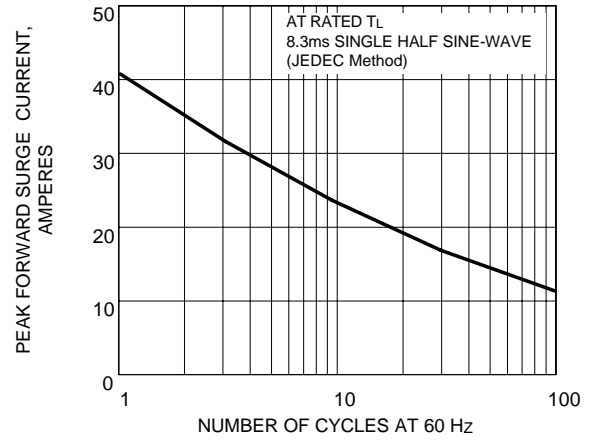


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

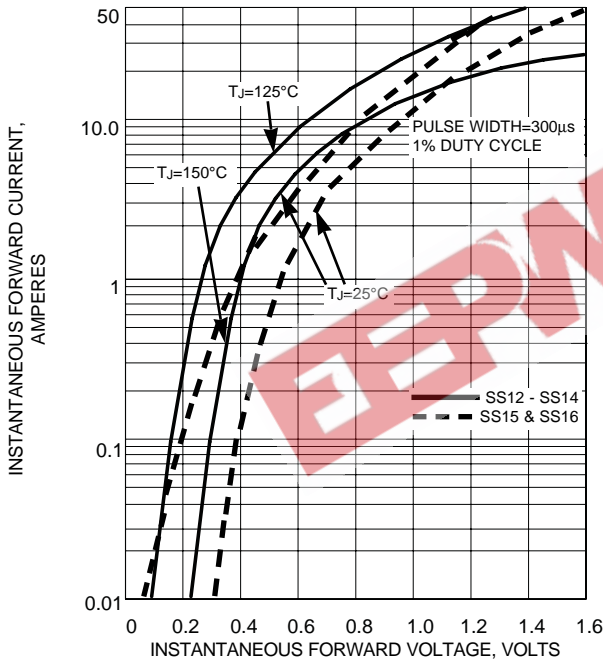


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

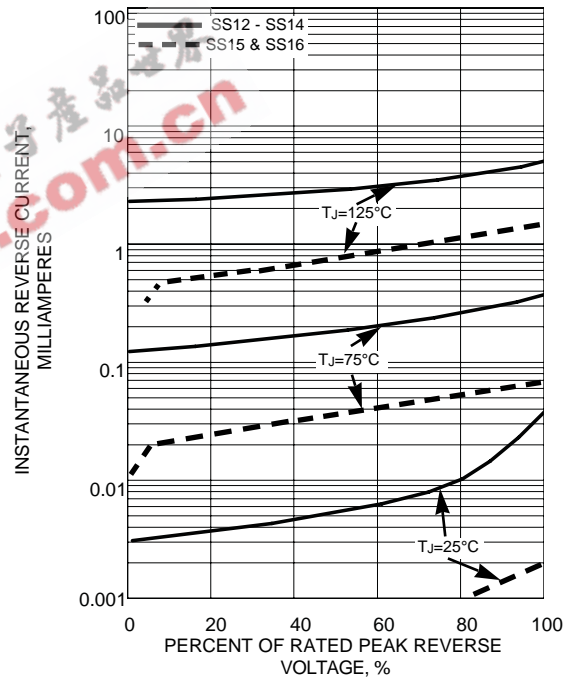


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

