



RoHS Compliant ALUMINIUM ELECTROLYTIC CAPACITOR


SS Series

■ **FEATURES**

- ◆ 7mm height to meet the requirement of smaller, thinner electronic products
- ◆ Applications for VTR, calculators, micro video and audio products, etc.



■ **OUTLINE**

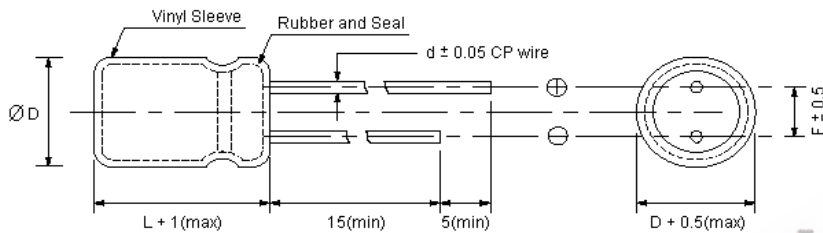

		mm			
D		4	5	6.3	8
F		1.5	2.0	2.5	3.5
d		0.45		0.50	

■ **SPECIFICATIONS**

Items	Characteristics								
Capacitance Tolerance (120Hz, 25°C)	± 20% (M)								
Rated Working Voltage Range	4 ~ 63Vdc								
Operation Temperature	-40°C ~ +85°C								
Leakage Current (25°C)	(After 2 minutes applying the Dc working voltage)								
	I ≤ 0.01CV or 3 (uA)								
	◆ I : Leakage Current (uA)	◆ C : Rated Capacitance (uF)			◆ V : Working Voltage (V)				
Surge Voltage (25°C)	W.V.	4	6.3	10	16	25	35	50	63
	S.V.	5	8	13	20	32	44	63	79
Dissipation Factor (120Hz, 25°C)	W.V.	4	6.3	10	16	25	35	50	63
	tan δ	0.35	0.24	0.20	0.16	0.14	0.12	0.10	0.10
Temperature Characteristics	W.V.	4	6.3	10	16	25	35	50	63
	- 25°C / + 25°C	7	4	3	2	2	2	2	2
	- 40°C / + 25°C	15	8	6	4	4	3	3	3
	◆ Impedance ratio at 120Hz								
Load Test	After 1000 hours application of WV at +85°C, the capacitor shall meet the following limits:								
	Capacitance Change	≤ ± 20% of initial value							
	tan δ	≤ 200% of initial specified value							
	Leakage Current	≤ initial specified value							
Shelf Test	After 500 hours, no voltage applied at + 85°C, the capacitor shall meet the following limits:								
	Capacitance Change	≤ ± 20% of initial value							
	tan δ	≤ 200% of initial specified value							
	Leakage Current	≤ 200% of initial specified value							

DB LECTRO^U

■ DIMENSIONS

D x L (mm)

uF \ WV	4	6.3	10	16	25	35	50	63
0.1]	4 x 7	4 x 7
0.22]	4 x 7	4 x 7
0.33]	4 x 7	4 x 7
0.47]	4 x 7	4 x 7
1]	4 x 7	4 x 7
2.2]	4 x 7	4 x 7
3.3]	4 x 7	4 x 7
4.7]	4 x 7	4 x 7
10]	4 x 7	4 x 7	4 x 7	5 x 7	5 x 7
22]	4 x 7	4 x 7	5 x 7	5 x 7	6.3 x 7	6.3 x 7
33]	4 x 7	4 x 7	5 x 7	6.3 x 7	8 x 7	
47]	4 x 7	5 x 7	6.3 x 7	6.3 x 7		
100	5 x 7	5 x 7	5 x 7	6.3 x 7	6.3 x 7			
220	6.3 x 7	6.3 x 7	6.3 x 7	8 x 7				
330	6.3 x 7	8 x 7	8 x 7					
470	8 x 7	8 x 7						

■ PERMISSIBLE RIPPLE CURRENT

mA (rms) at 120Hz 85°C

uF \ WV	4	6.3	10	16	25	35	50	63
0.1]	3	4
0.22]	3	4
0.33]	5	6
0.47]	6	7
1]	10	12
2.2]	18	20
3.3]	22	25
4.7]	27	31
10]	28	31	34	42	47
22]	36	42	48	54	58	83
33]	45	54	60	69	95	
47]	56	65	86	91		
100	60	73	80	93	102			
220	112	135	145	170				
330	128	150	184					
470	155	190						