




Models Available

### Features/Benefits

- Compact size—small footprint
- Single and double pole models
- PC and panel mount options available

### Typical Applications

- Hand-held telecommunications
- Instrumentation
- Medical equipment

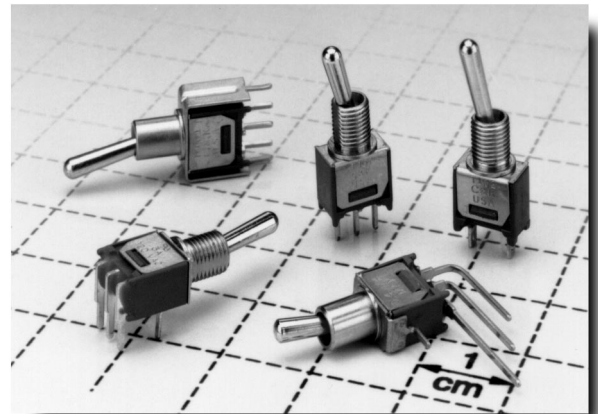

### Build-A-Switch

Our easy Build-A-Switch concept allows you to mix and match options to create the switch you need. Below is a complete listing of options shown in catalog. To order, simply select desired option from each category and place in the appropriate box. Switches with standard options are shown on pages A-40 and A-41. Available options are shown and described on pages A-41 thru A-45. For additional options not shown in catalog, consult Customer Service Center. All models have epoxy terminal seal and are compatible with all "bottom-wash" PCB cleaning methods.

Typical Example:



#### Switch Function

- T101 (STD.) SPDT On-None-On
- T103 (STD.) SPDT On-Off-On
- T105 (STD.) SPDT Mom.-Off-Mom.
- T201 (STD.) DPDT On-None-On
- T102 SPST Off-None-On
- T107 SPDT On-Off-Mom.
- T108 SPDT On-None-Mom.
- T203 DPDT On-Off-On
- T205 DPDT Mom.-Off-Mom.
- T207 DPDT On-Off-Mom.
- T208 DPDT On-None-Mom.
- T211 DPDT On-On-On

#### Actuator

- M (STD.) .210" high
- P3 (STD.) Flatted, anti-rotation, .450" high
- S (STD.) .370" high
- K Locking lever
- K1 Locking lever
- L .290" high
- L1 .620" high
- M1 .220" high
- S1 .410" high

#### Bushing

- H (STD.) .220" high, threaded, flat
- H9 (STD.) .220" high, unthreaded, flat
- CF Splashproof, .310" high, threaded, flat
- D9 .260" high, unthreaded, keyway
- K9 .310" high, unthreaded, keyway
- T .310" high, threaded, flat
- T9 .310" high, unthreaded, flat
- TD .260" high, threaded, keyway
- TK .310" high, threaded, keyway
- Y .220" high, threaded, keyway
- Y9 .220" high, unthreaded, keyway

#### Terminations

- A (STD.) Right angle, PC thru-hole
- AV (STD.) Vertical right angle, PC thru-hole
- C (STD.) PC Thru-hole
- V3 (STD.) Vertical mount V-bracket
- Z (STD.) Solder lug
- W Wire wrap

#### Contact Material

- B (STD.) Gold
- Q (STD.) Silver
- K Gold
- M Silver
- G Gold over silver
- L Gold over silver

#### Seal

- E (STD.) Epoxy

#### Locking Lever Actuator Finish

- NONE (STD.) Natural aluminum
- 2 Black
- 3 Red
- 7 Blue

### Specifications

CONTACT RATING: B contact material: 0.4 VA max. @ 20 V AC or DC max. Q contact material (TX01 models): 3 AMPS @ 120 V AC or 28 V DC. All other models: 2 AMPS @ 120 V AC or 28 V DC. See page A-45 for additional ratings.

ELECTRICAL LIFE: TX01 models: 60,000 make-and-break cycles at full load. All other models: 30,000 cycles.

CONTACT RESISTANCE: Below 20 milliohms typ. initial @ 2-4 V DC, 100 mA, for both silver and gold plated contacts.

INSULATION RESISTANCE: 10<sup>9</sup> ohms min.

DIELECTRIC STRENGTH: 1000 V RMS min. @ sea level.

OPERATING TEMPERATURE: -30°C to 85°C.

SOLDERABILITY: Per MIL-STD-202F method 208D, or EIA RS-186E method 9 (1 hour steam aging).

**NOTE:** Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

### Materials

CASE: Glass filled nylon 6/6, flame retardant, heat stabilized or diallyl phthalate (DAP), (UL 94V-0).

ACTUATOR: Brass, chrome plated.

BUSHING: Brass, nickel plated.

HOUSING: Stainless steel.

SWITCH SUPPORT: Brass, tin plated.

END CONTACTS: B contact material: Copper alloy, with gold plate over nickel plate. Q contact material: Coin silver, silver plated. See page A-45 for additional contact materials.

CENTER CONTACTS & TERMINALS: B contact material: Copper alloy, with gold plate over nickel plate. Q contact material: Copper alloy, silver plated. See page A-45 for additional contact materials.

TERMINAL SEAL: Epoxy.

HARDWARE: Nut & Locking Ring: Brass, nickel plated. Lockwasher: Steel, nickel plated.

# T Series Subminiature Toggle Switches



## SWITCHES WITH STANDARD OPTIONS




A

Toggle



T101SHZQE  
SPDT

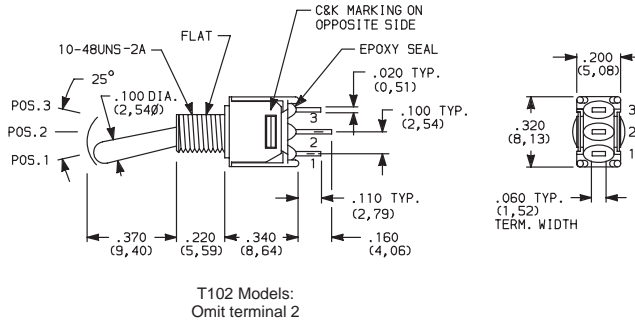


T102 Models:  
Omit terminal 2

PART NUMBER	NO. POLES	POS. 1	POS. 2	POS. 3
T101SHZQE	SPDT	ON	NONE	ON

NOTE: For PC termination, replace 'Z' with 'C'.  
For panel mounting information, see page A-42.  
For PC mounting information, see page A-43.



T201SHZQE  
DPDT

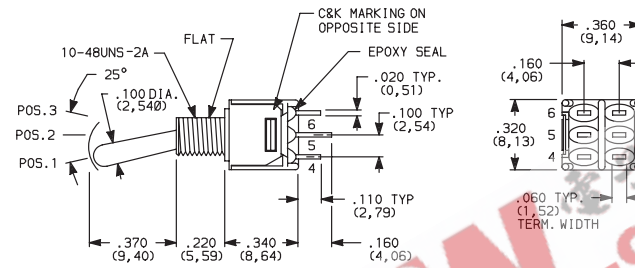


PART NUMBER	NO. POLES	POS. 1	POS. 2	POS. 3
T201SHZQE	DPDT	ON	NONE	ON

NOTE: For PC termination, replace 'Z' with 'C'.  
For panel mounting information, see page A-42.  
For PC mounting information, see page A-43.




T101MH9ABE  
Horizontal Actuation  
SPDT

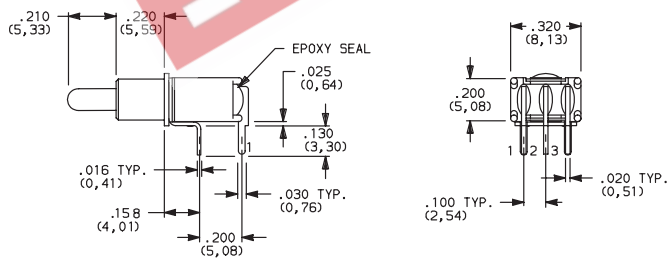


PART NUMBER	NO. POLES	POS. 1	POS. 2	POS. 3
T101MH9ABE	SPDT	ON	NONE	ON
T103MH9ABE		ON	OFF	ON
T105MH9ABE		MOM.	OFF	MOM.
T107MH9ABE		ON	OFF	MOM.
T108MH9ABE		ON	NONE	MOM.

NOTE: For PC mounting information, see page A-43.  
MOM. = Momentary



T201MH9ABE  
Horizontal Actuation  
DPDT

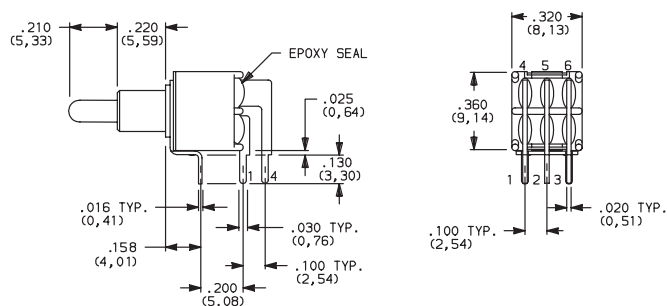

PART NUMBER	NO. POLES	POS. 1	POS. 2	POS. 3
T201MH9ABE	DPDT	ON	NONE	ON

NOTE: For PC mounting information, see page A-43.





# T Series Subminiature Toggle Switches

## SWITCH WITH STANDARD OPTIONS

PART NUMBER	NO. POLES	POS. 1	POS. 2	POS. 3
<b>T101MH9AVBE</b>	SPDT	ON	NONE	ON

NOTE: For PC mounting information, see page A-44.

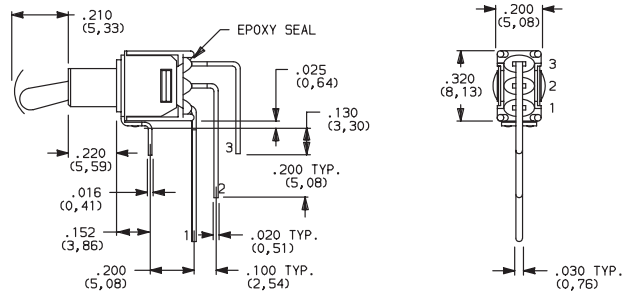

## SWITCH FUNCTION

NO. POLES	MODEL NO.	SWITCH FUNCTION			CONNECTED TERMINALS			SCHEMATIC
		POS. 1	POS. 2	POS. 3	POS. 1	POS. 2	POS. 3	
SP	<b>T101 (STD.)</b>	ON	NONE	ON				
	<b>T103 (STD.)</b>	ON	OFF	ON				
	<b>T105 (STD.)</b>	MOM.	OFF	MOM.	2-3	OPEN	2-1	
	<b>T107</b>	ON	OFF	MOM.				
	<b>T108</b>	ON	NONE	MOM.				
	<b>T102</b>	OFF	NONE	ON	OPEN	N/A	3-1	
DP	<b>T201 (STD.)</b>	ON	NONE	ON				
	<b>T203</b>	ON	OFF	ON				
	<b>T205</b>	MOM.	OFF	MOM.	2-3,5-6	OPEN	2-1,5-4	
	<b>T207</b>	ON	OFF	MOM.				
	<b>T208</b>	ON	NONE	MOM.				
	<b>T211*</b>	ON	ON	ON	2-3,5-6	2-3,5-4	2-1,5-4	


MOM. = Momentary

All models with all options when ordered with G, L, M or Q contact material.

\* Wiring for 3-way switch, see page L-29.


## ACTUATOR

**M (STD.)** .210" HIGH




Standard with A, AV or V3 terminations.

**S (STD.)** .370" HIGH




Standard with Z, C or W terminations.


**M1** .220" HIGH




**S1** .410" HIGH




**L** .290" HIGH



**L1** .620" HIGH



**P3 (STD.)** ANTI-ROTATION, FLATTED, .450" HIGH

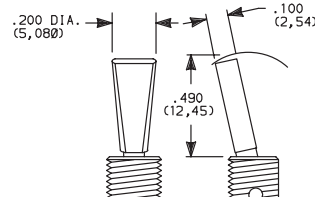

Available with T & T9 bushings only.

1 Actuator shown with standard H bushing. Subtract .040 (1,02) for TD and D9 bushings, subtract .090 (2,29) for T, T9, TK, K9 & CF bushings.


2 Actuators shown with T, TK & CF bushings, add .050 (1,27) for TD and D9 bushings, add .090 (2,29) for H, H9, Y & Y9 bushings.

**NOTE:** Dress nut part number 709901201 supplied standard with threaded bushing. All actuators have chrome finish (except K & K1). No finish selection required.


# T Series Subminiature Toggle Switches




Toggle  
A



## K LOCKING LEVER

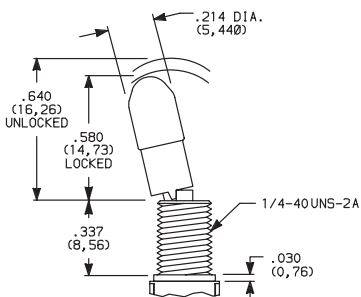

## K1 LOCKING LEVER

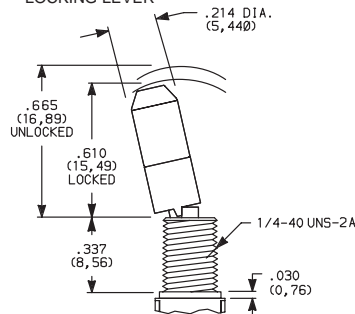

## Locking Positions



-01 & -02 Models  
2 Position lock



-03 & -11 Models  
3 Position lock



-08 Models  
1 Position lock

OPTION CODE	K & K1 ACTUATOR CAP FINISH
NONE	(STD.) NATURAL AL.
2	BLACK ANODIZED AL.
3	RED ANODIZED AL.
7	BLUE ANODIZED AL.


Not available with CF bushing option.

**NOTE:** Keyway on right side. To prevent accidental actuation, toggles must be lifted before being actuated. When released, toggles again lock in place. Overtightening mounting nut may cause actuator to bind.

Bushing option code not required. Not available with TX05 & TX07 models.


## BUSHING

### H (STD.) .220" HIGH THREADED, FLAT




H standard with C, W & Z terminations.  
H9 standard with A, AV & V3 terminations.

### Y .220" HIGH THREADED, KEYWAY




### Y9 .220" HIGH UNTHREADED, KEYWAY

### T .310" HIGH THREADED, FLAT




### T9 .310" HIGH UNTHREADED, FLAT

### TK .310" HIGH THREADED, KEYWAY

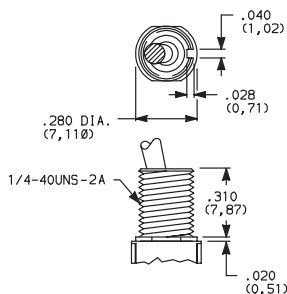


### K9 .310" HIGH UNTHREADED, KEYWAY

### TD .260" HIGH THREADED, KEYWAY




### D9 .260" HIGH UNTHREADED, KEYWAY

### CF SPLASHPROOF, .310" HIGH THREADED, FLAT




IP67 Degree of protection.  
Internal o-ring actuator seal and external bushing seal washer standard.


Not available with K locking lever option.

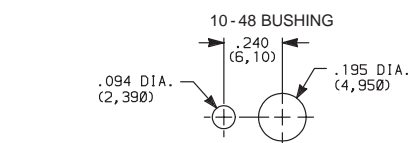

With Standard Locking Ring




Without Locking Ring

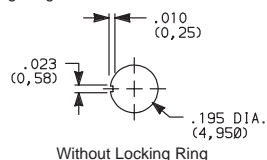


Without Locking Ring


### PANEL MOUNTING




With Standard Locking Ring



With Small Locking Ring

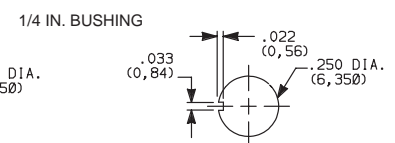

With Standard Locking Ring




Without Locking Ring

## TERMINATIONS




### Z (STD.) SOLDER LUG

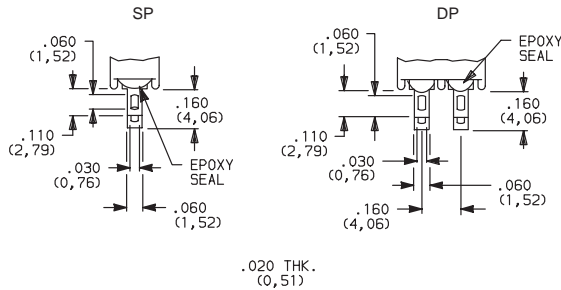


Not available with K, L or M contact materials.


### C (STD.) PC THRU-HOLE

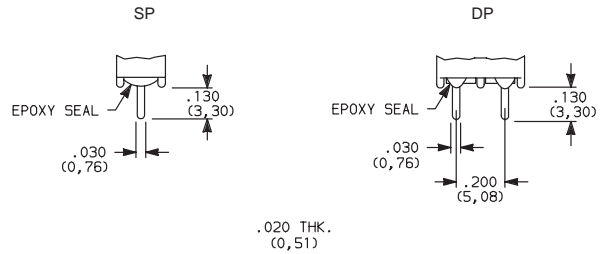


### W WIRE WRAP

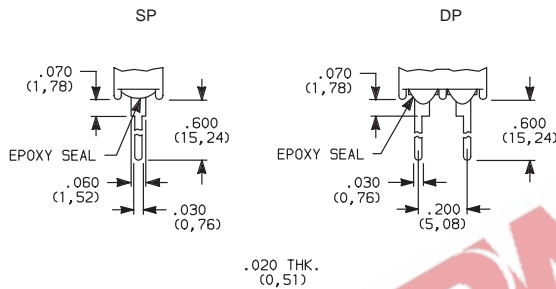


### PC MOUNTING

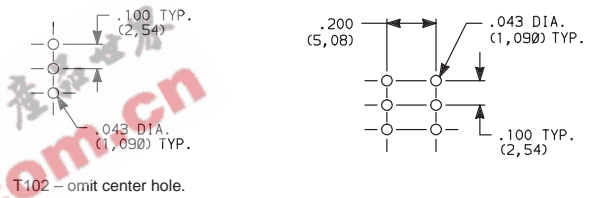

### A (STD.) RIGHT ANGLE, PC THRU-HOLE

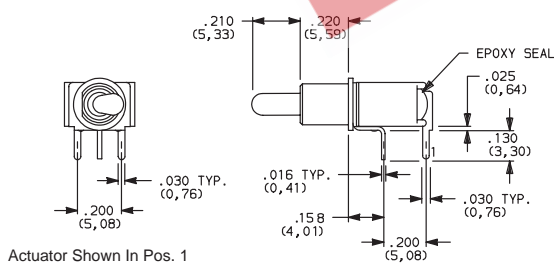


### PC MOUNTING

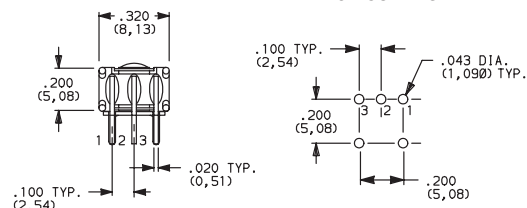



**T101MH9ABE**  
Horizontal Actuation  
**SPDT**

Not available with T102 model.

### A (STD.) RIGHT ANGLE, PC THRU-HOLE

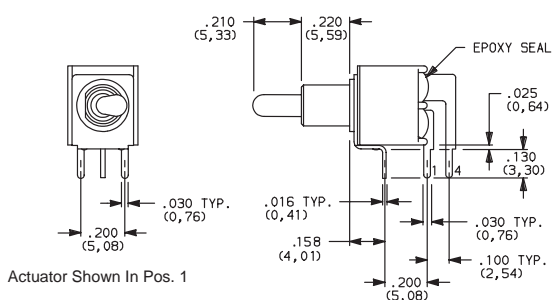

### PC MOUNTING

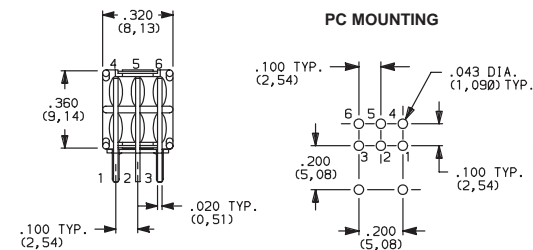

**T201MH9ABE**  
Horizontal Actuation  
**DPDT**


# T Series Subminiature Toggle Switches




## TERMINATIONS

**AV** (STD.) VERTICAL RIGHT ANGLE, PC THRU-HOLE


**A**  
Toggle




**T101MH9AVBE**  
Vertical Actuation  
**SPDT**



Actuator Shown In Pos. 1

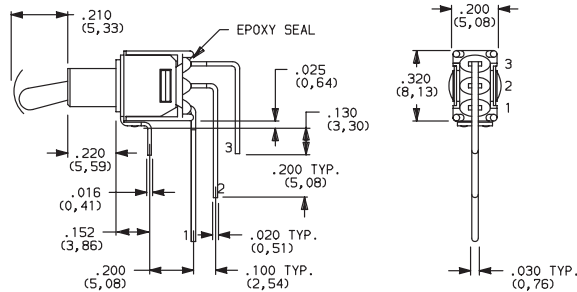


T102 Models: Omit terminal 2




NOTE: Terminal bend radii and lead-in manufacturing option.



**AV** (STD.) VERTICAL RIGHT ANGLE, PC THRU-HOLE



**T201MH9AVBE**  
Vertical Actuation  
**DPDT**



Actuator Shown In Pos. 1

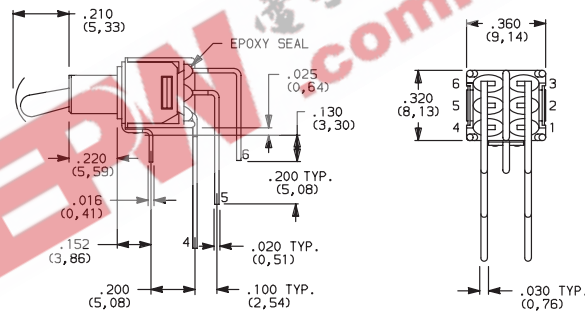


NOTE: Terminal bend radii and lead-in manufacturing option.


**V3** (STD.) VERTICAL MOUNT, V-BRACKET





**T101MH9V3BE**  
**SPDT**



Actuator Shown In Pos. 1



T102 Models:  
Omit terminal 2



T102 Models:  
Omit center hole.

