

File Number 300

T4700 Series


15-Ampere Silicon Triacs

For Phase-Control and Load-Switching Applications

Features:

- 800V, 125 Deg. C T_J Operating
- High dv/dt and di/dt Capability
- Low Switching Losses
- High Pulse Current Capability
- Low Forward and Reverse Leakage
- Sipos Oxide Glass Multilayer Passivation System
- Advanced Unisurface Construction
- Precise Ion Implanted Diffusion Source

TERMINAL DESIGNATIONS



JEDEC TO-213AA

The RCA T4700 Series are gate-controlled full-wave ac silicon switches. They are designed to switch from an off-state to a conducting state for either polarity of applied voltage with positive or negative gate triggering.

These devices are intended for the control of ac loads in applications such as space heater, oven and furnace controls, motor controls, and lamp loads.

MAXIMUM RATINGS, Absolute-Maximum Values:

		T4700B	T4700D	T4700M	T4700N	
REPETITIVE PEAK OFF-STATE VOLTAGE: \square						
Gate Open	V_{DROM}	200	400	600	800	V
RMS ON-STATE CURRENT:						
$T_C = 95^\circ\text{C}$, conduction angle = 360°	$I_{T(RMS)}$			15		A
PEAK SURGE (NON-REPETITIVE) ON-STATE CURRENT:	I_{TSM}					
For one full cycle of applied principal voltage				100		A
60 Hz (sinusoidal)						
For one full cycle of applied principal voltage				85		A
(50-Hz, sinusoidal)						
For more than one full cycle of applied voltage				See Fig. 3		
PEAK GATE-TRIGGER CURRENT:						
For 1 μs max.	I_{GTM}			4		A
FUSING CURRENT (for triac protection):						
$T_J = -40$ to 100°C , $t = 1.25$ to 10 ms	$ i^2t $			50		A ² s
GATE POWER DISSIPATION:						
Peak* (for 1 μs max. and $I_{GTM} \leq 4$ A)	P_{GM}			16		W
Average (averaging time = 10 ms max.)	$P_{G(AV)}$			0.45		W
TEMPERATURE RANGE: Δ						
Storage	T_{stg}			-40 to 150		$^\circ\text{C}$
Operating (Case)	T_C			-40 to 125		$^\circ\text{C}$
PIN TEMPERATURE (During soldering):						
At distances $\geq 1/32$ in. (0.8 mm) from seating plane for 10 s max.	T_P			225		$^\circ\text{C}$

\square For either polarity of main terminal 2 voltage (V_{MT2}) with reference to main terminal 1.
 \bullet For either polarity of gate voltage (V_G) with reference to main terminal 1.
 Δ For temperature measurement reference point, see *Dimensional Outline*.

Triacs

T4700 Series

ELECTRICAL CHARACTERISTICS

At Maximum Ratings and at Indicated Case Temperature (T_c) Unless Otherwise Specified

CHARACTERISTIC	SYMBOL	LIMITS			UNITS
		For All Types Unless Otherwise Specified			
		Min.	Typ.	Max.	
Peak Off-State Current [♦] Gate open, T _J = 125°C, V _{DROM} = Max. rated value	I _{DROM}	—	0.2	4	mA
Instantaneous On-State Voltage [♦] For I _T = 30A (peak), T _C 25°C	v _T	—	1.6	2.0	V
DC Holding Current [♦] Gate open, Initial principal current = 150 mA (DC), v _D = 12V: T _C = 25°C For other case temperatures	I _{HO}	—	15 See Fig. 5	60	mA
Critical Rate of Applied Commutating Voltage [♦] For v _D = V _{DROM} , I _{T(RMS)} = 15 A, commutating di/dt = 8 A/ms, and gate unenergized At T _C = +95°C	dv/dt	2	10	—	V/μs
Critical Rate of Rise of Off-State Voltage [♦] For v _D = V _{DROM} , exponential voltage rise, and gate open At T _C = 125°C	dv/dt				
T4700B		30	150	—	V/μs
T4700D		20	100	—	
T4700M		15	75	—	
T4700N		10	50	—	
DC Gate-Trigger Current [♦] ■ For v _D = 6 volts (dc), R _L = 12 ohms, T _C = +25°, and Specified Triggering Mode: I ⁺ Mode: V _{T2} is positive, V _G is positive I ⁻ Mode: V _{T2} is positive, V _G is negative III ⁺ Mode: V _{T2} is negative, V _G is positive III ⁻ Mode: V _{T2} is negative, V _G is negative For other case temperatures	I _{GT}	—	15 35 35 15	30 80 80 30	mA
DC Gate-Trigger Voltage [♦] ■ For v _D = 6 volts (dc) and R _L = 12 ohms At T _C = +25° For other case temperatures For v _D = V _{DROM} , R _L = 125 Ω, T _C = 125°C	V _{GT}	— 0.2	1 —	2.5 —	V
Gate-Controlled Turn-On Time (Delay Time + Rise Time) For v _D = V _{DROM} , I _G = 160 mA, t _r = 0.1 μs, I _T = 25 A (peak), T _C = 25°C	t _{gt}	—	1.6	2.5	μs
Thermal Resistance: Junction-to-Case	R _{θJC}	—	—	1.3	°C/W

♦For either polarity of main terminal 2 voltage (V_{T2}) with reference to main terminal 1.

■For either polarity of gate voltage (V_G) with reference to main terminal 1.

T4700 Series

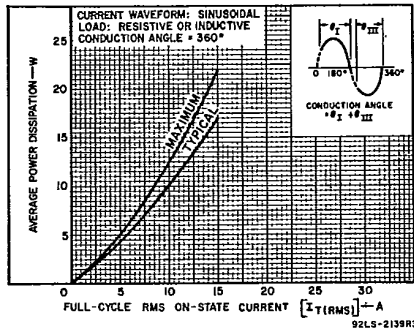


Fig. 1 - Power dissipation curve.

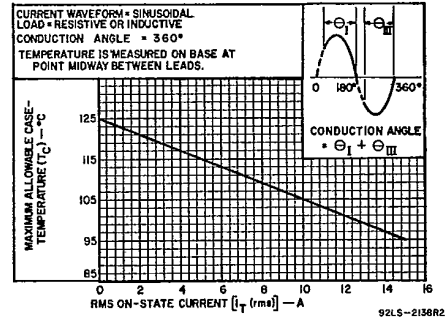


Fig. 2 - Conduction rating chart (case temperature).

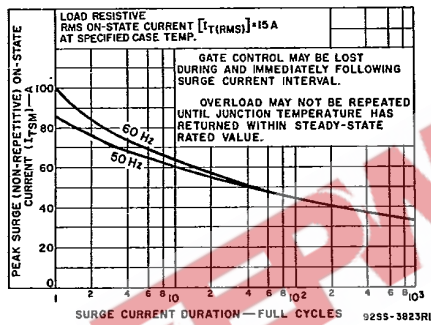


Fig. 3 - Surge current rating chart.

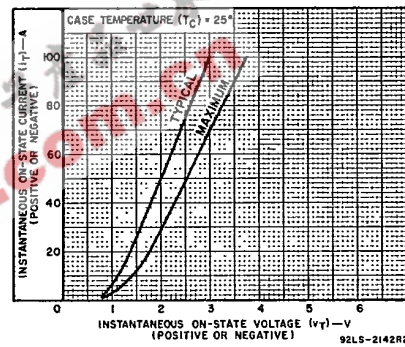


Fig. 4 - On-state characteristics for either direction of principal current.

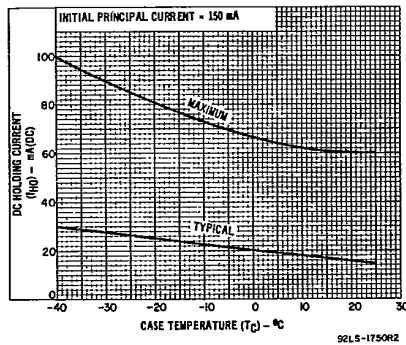


Fig. 5 - DC holding current characteristics for either direction of principal current.

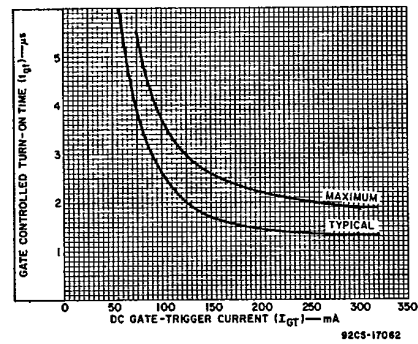


Fig. 6 - Turn-on time vs. gate trigger current.

Triacs

T4700 Series

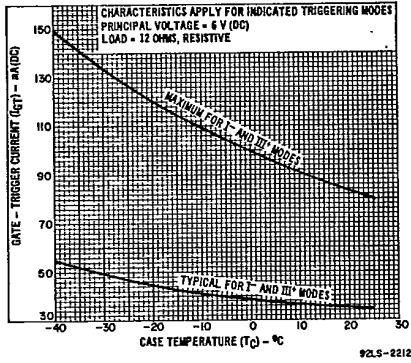


Fig. 7 — DC gate-trigger current characteristics for I- and III+ modes.

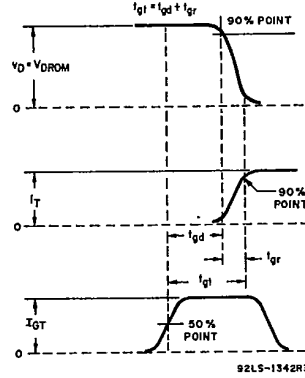


Fig. 8 — Waveshapes of t_{gt} characteristics test.

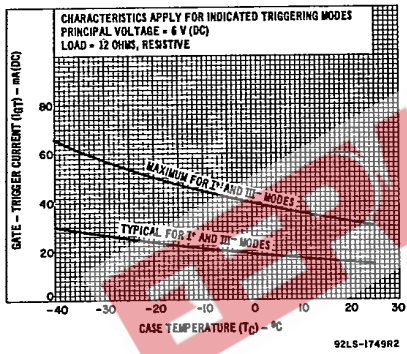


Fig. 9 — DC gate-trigger current characteristics for I+ and III- modes.

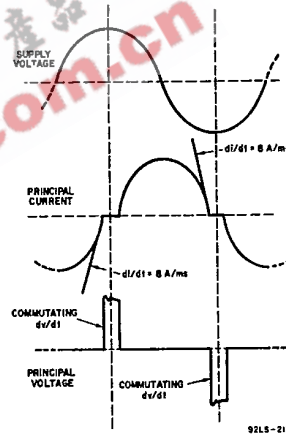


Fig. 10 — Waveshapes of commutating dv/dt characteristics.

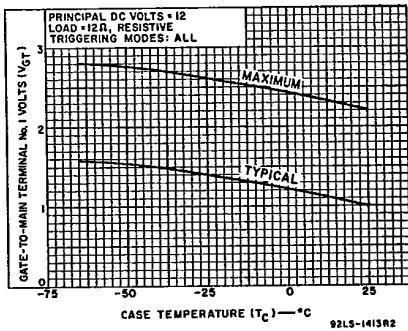


Fig. 11 — DC gate-trigger voltage characteristics.