




TC1411
TC1411N

1A HIGH-SPEED MOSFET DRIVERS

FEATURES

- Latch-Up Protected: Will Withstand 500mA Reverse Current
 - Input Will Withstand Negative Inputs Up to 5V
 - ESD Protected 4 kV
 - High Peak Output Current 1A
 - Wide Operating Range 4.5V to 16V
 - High Capacitive Load
Drive Capability 1000pF in 25nsec
 - Short Delay Time 30nsec Typ
 - Consistent Delay Times With Changes in Supply Voltage
 - Matched Delay Times
 - Low Supply Current
 - With Logic “1” Input 500 μ A
 - With Logic “0” Input 150 μ A
 - Low Output Impedance 8 Ω
 - Pinout Same as TC1410/12/13

PIN CONFIGURATIONS

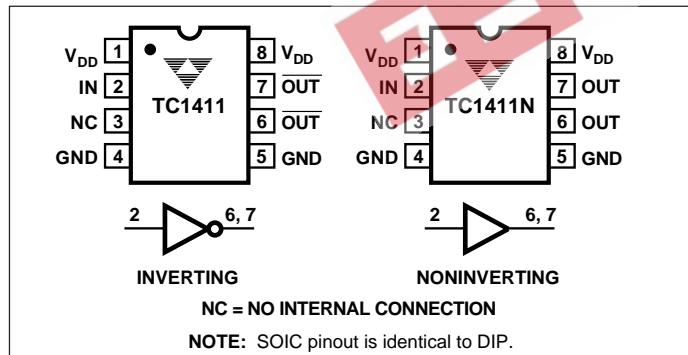

GENERAL DESCRIPTION


The TC1411/1411N are 1A CMOS buffer/drivers. They will not latch up under any conditions within their power and voltage ratings. They are not subject to damage when up to 5V of noise spiking of either polarity occurs on the ground pin. They can accept, without damage or logic upset, up to 500 mA of current of either polarity being forced back into their output. All terminals are fully protected against up to 4 kV of electrostatic discharge.

As MOSFET drivers, the TC1411/1411N can easily switch 1000 pF gate capacitance in 25nsec with matched rise and fall times, and provide low enough impedance in both the ON and the OFF states to ensure the MOSFET's intended state will not be affected, even by large transients. The rise and fall time edges are matched to allow driving short-duration inputs with greater accuracy.

ORDERING INFORMATION

Part No.	Package	Temp. Range
TC1411COA	8-Pin SOIC	0°C to +70°C
TC1411CPA	8-Pin Plastic DIP	0°C to +70°C
TC1411EOA	8-Pin SOIC	-40°C to +85°C
TC1411EPA	8-Pin Plastic DIP	-40°C to +85°C
TC1411NCOA	8-Pin SOIC	0°C to +70°C
TC1411NCPA	8-Pin Plastic DIP	0°C to +70°C
TC1411NEOA	8-Pin SOIC	-40°C to +85°C
TC1411NEPA	8-Pin Plastic DIP	-40°C to +85°C

FUNCTIONAL BLOCK DIAGRAM

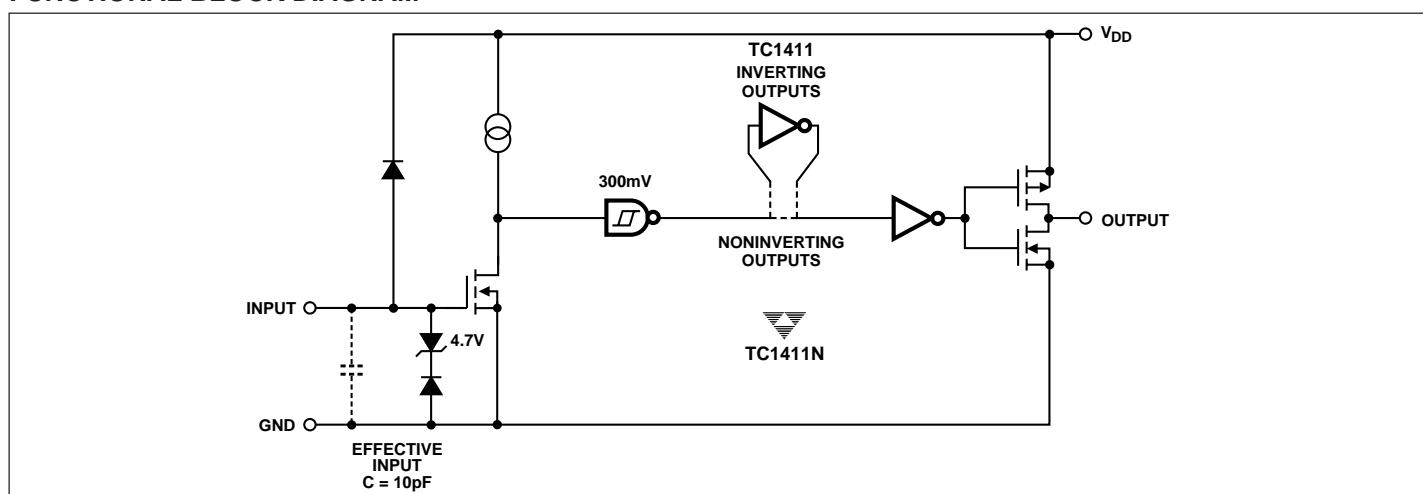

1A HIGH-SPEED MOSFET DRIVERS

TC1411 TC1411N

ABSOLUTE MAXIMUM RATINGS*

Supply Voltage	+20V
Input Voltage, IN A or IN B ..(V _{DD} + 0.3V) to (GND - 5.0V)	
Maximum Chip Temperature	+150°C
Storage Temperature Range	- 65°C to +150°C
Lead Temperature (Soldering, 10 sec)	+300°C
Package Thermal Resistance	
CerDIP R _{θJ-A}	150°C/W
CerDIP R _{θJ-C}	50°C/W
PDIP R _{θJ-A}	125°C/W
PDIP R _{θJ-C}	42°C/W
SOIC R _{θJ-A}	155°C/W
SOIC R _{θJ-C}	45°C/W

Operating Temperature Range

C Version	0°C to +70°C
E Version	- 40°C to +85°C
Power Dissipation (T _A ≤ 70°C)	
Plastic	730mW
CerDIP	800mW
SOIC	470mW

*Static-sensitive device. Unused devices must be stored in conductive material. Protect devices from static discharge and static fields. Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions above those indicated in the operation sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS: Over operating temperature range with 4.5V ≤ V_{DD} ≤ 16V, unless otherwise specified.

Symbol	Parameter	Test Conditions		Min	Typ	Max	Unit
Input							
V _{IH}	Logic 1 High Input Voltage			2.0	—	—	V
V _{IL}	Logic 0 Low Input Voltage			—	—	0.8	V
I _{IN}	Input Current	−5V ≤ V _{IN} ≤ V _{DD}	T _A = 25°C − 40°C ≤ T _A ≤ 85°C	− 1 − 10	—	1 10	μA
Output							
V _{OH}	High Output Voltage	DC Test		V _{DD} − 0.025	—	—	V
V _{OL}	Low Output Voltage	DC Test		—	—	0.025	V
R _O	Output Resistance	V _{DD} = 16V, I _O = 10mA	T _A = 25°C 0°C ≤ T _A ≤ 70°C − 40°C ≤ T _A ≤ 85°C	— — —	8 10 10	11 14 14	Ω
I _{PK}	Peak Output Current	V _{DD} = 16V		—	1.0	—	A
I _{REV}	Latch-Up Protection Withstand Reverse Current	Duty Cycle ≤ 2% t ≤ 300 μsec	V _{DD} = 16V	0.5	—	—	A
Switching Time (Note 1)							
t _R	Rise Time	Figure 1	T _A = 25°C 0°C ≤ T _A ≤ 70°C − 40°C ≤ T _A ≤ 85°C	— — —	25 27 29	35 40 40	nsec
t _F	Fall Time	Figure 1	T _A = 25°C 0°C ≤ T _A ≤ 70°C − 40°C ≤ T _A ≤ 85°C	— — —	25 27 29	35 40 40	nsec
t _{D1}	Delay Time	Figure 1	T _A = 25°C 0°C ≤ T _A ≤ 70°C − 40°C ≤ T _A ≤ 85°C	— — —	30 33 35	40 45 45	nsec
t _{D2}	Delay Time	Figure 1	T _A = 25°C 0°C ≤ T _A ≤ 70°C − 40°C ≤ T _A ≤ 85°C	— — —	30 33 35	40 45 45	nsec
Power Supply							
I _S	Power Supply Current	V _{IN} = 3V V _{IN} = 0V	V _{DD} = 16V	— —	0.5 0.1	1.0 0.15	mA

NOTE: 1. Switching times are guaranteed by design.

1A HIGH-SPEED MOSFET DRIVERS

**TC1411
TC1411N**


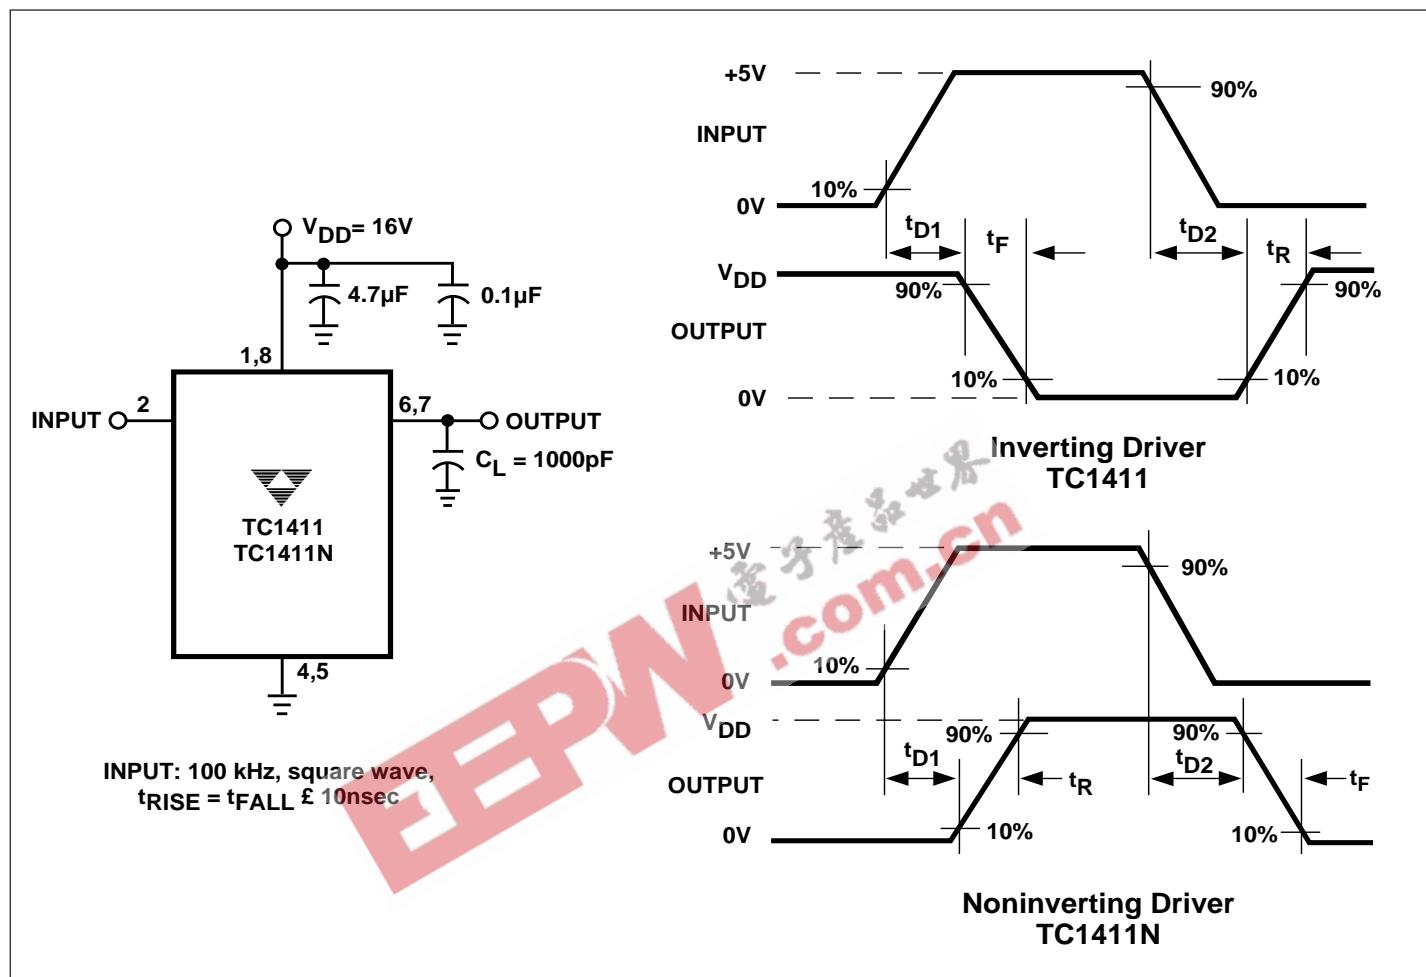


Figure 1. Switching Time Test Circuit

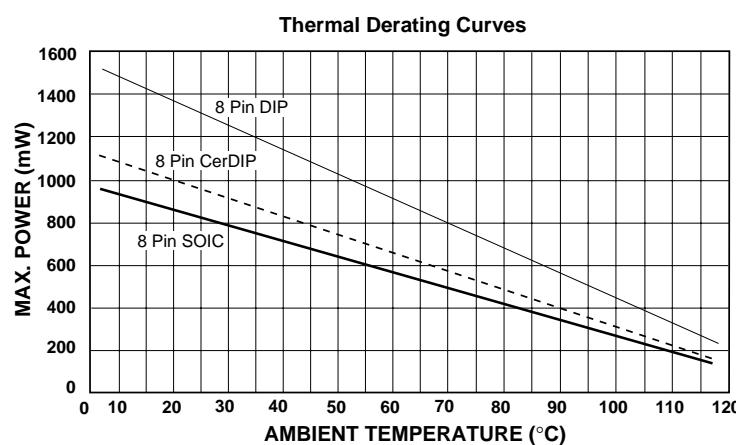


1A HIGH-SPEED MOSFET DRIVERS


TC1411
TC1411N

TYPICAL CHARACTERISTICS


Quiescent Supply Current
vs. Supply Voltage
 $T_A = 25^\circ\text{C}$

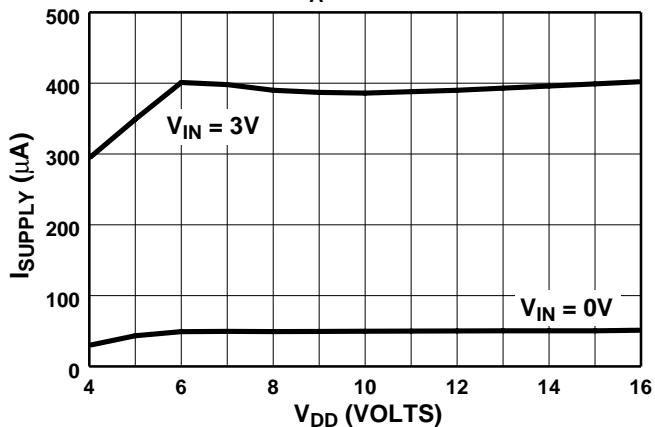


Quiescent Supply Current
vs. Temperature
 $V_{SUPPLY} = 16\text{V}$

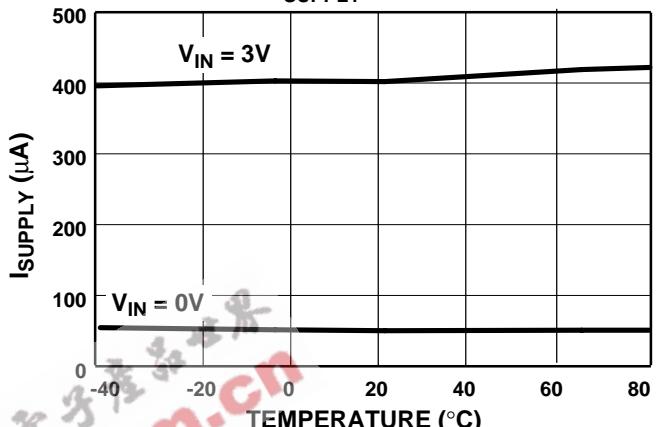


Input Threshold
vs. Supply Voltage
 $T_A = 25^\circ\text{C}$

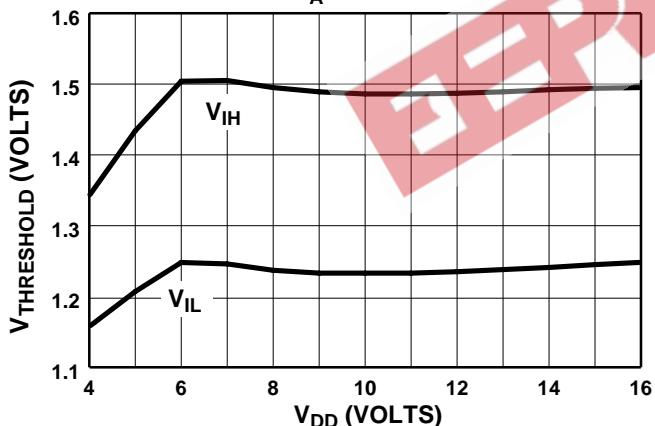


Input Threshold
vs. Temperature
 $V_{SUPPLY} = 16\text{V}$

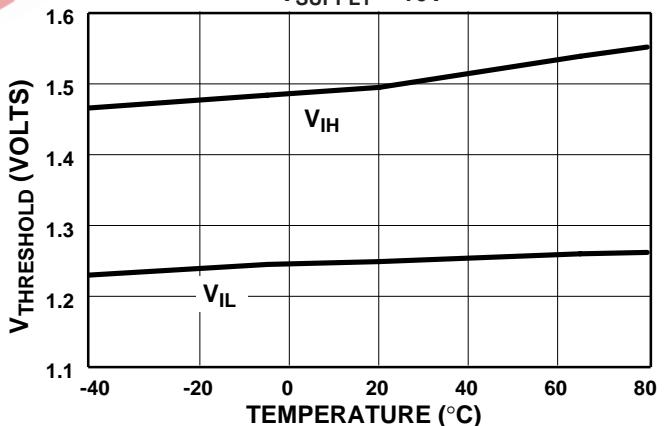

High-State Output Resistance

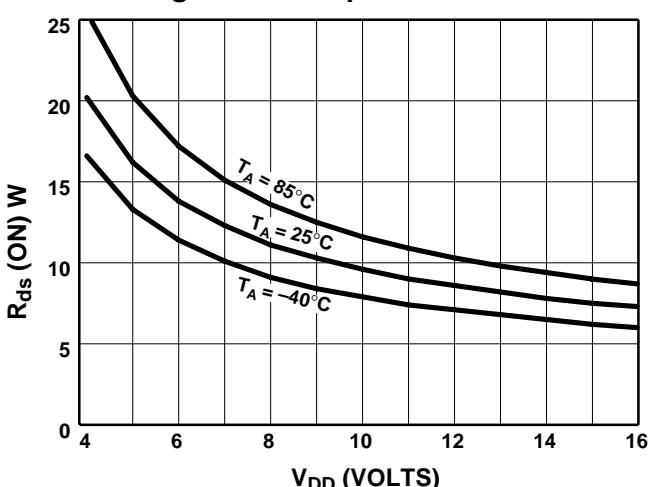

Low-State Output Resistance

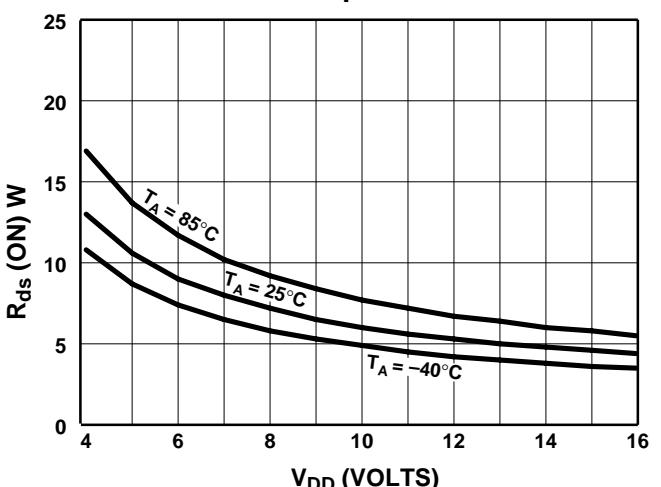


1A HIGH-SPEED MOSFET DRIVERS


TC1411
TC1411N

TYPICAL CHARACTERISTICS (Cont.)


Rise Time vs. Supply Voltage
 $C_{LOAD} = 1000\text{pF}$

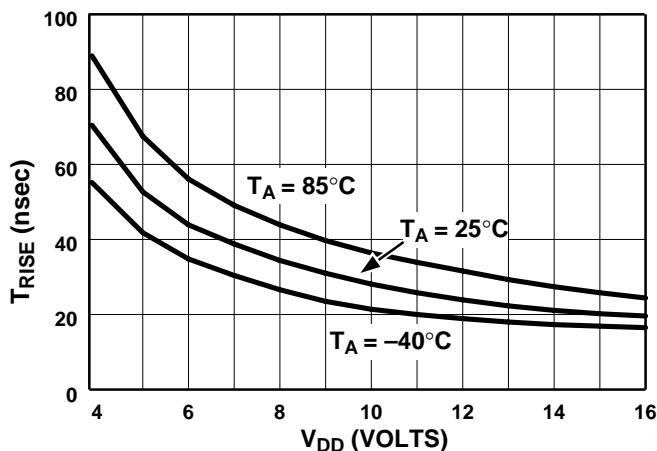


Fall Time vs. Supply Voltage
 $C_{LOAD} = 1000\text{pF}$

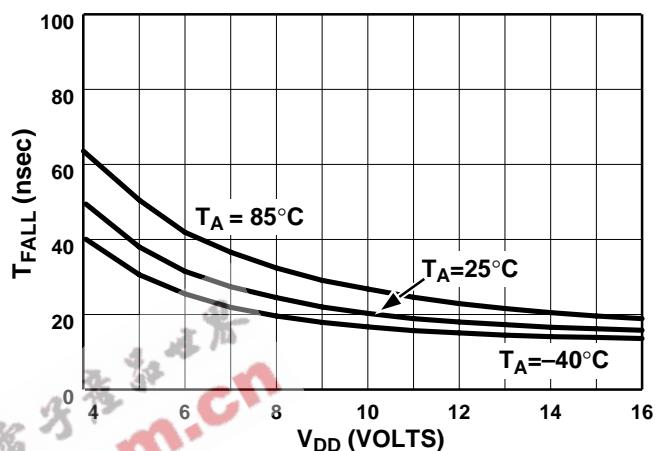


T_{D1} Propagation Delay vs. Supply Voltage
 $C_{LOAD} = 1000\text{pF}$

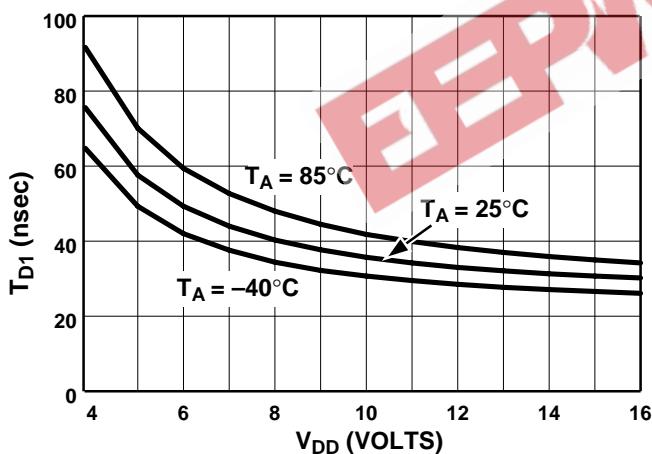

T_{D2} Propagation Delay vs. Supply Voltage
 $C_{LOAD} = 1000\text{pF}$

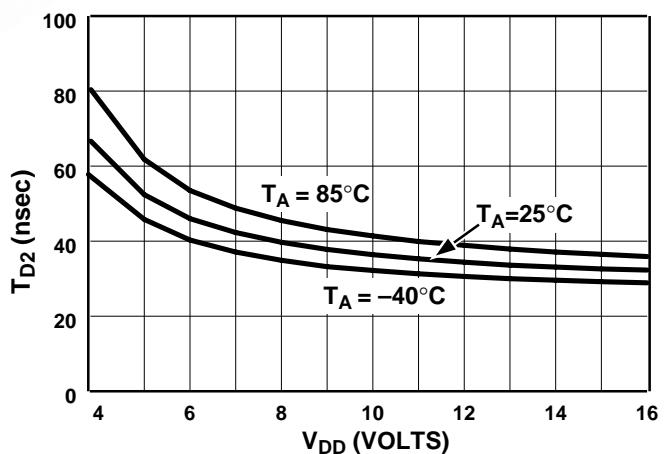

Rise and Fall Times vs. Capacitive Load
 $T_A = 25^\circ\text{C}$, $V_{DD} = 16\text{V}$

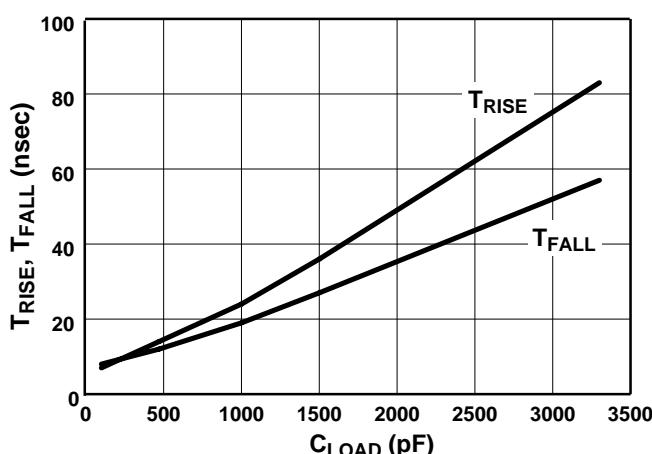

Propagation Delays vs. Capacitive Load
 $T_A = 25^\circ\text{C}$, $V_{DD} = 16\text{V}$

