


### Switchmode Dual Ultrafast Power Rectifiers

-- Designed for use in switching power supplies inverters and as free wheeling diodes. These state-of-the-art devices have the following features:

- \* High Surge Capacity
- \* Low Power Loss, High efficiency
- \* Glass Passivated chip junctions
- \* 150 °C Operating Junction Temperature
- \* Low Stored Charge Majority Carrier Conduction
- \* Low Forward Voltage, High Current Capability
- \* High-Switching Speed 50 Nanosecong Recovery Time
- \* Plastic Material used Carries Underwriters Laboratory  
Flammability Classification 94V-O

**ULTRA FAST  
RECTIFIERS**


**10 AMPERES  
300-600 VOLTS**



**TO-220AB**

### MAXIMUM RATINGS


Characteristic	Symbol	U10C30	U10C40	U10C50	U10C60	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	$V_{RRM}$ $V_{RWM}$ $V_R$	300	400	500	600	V
RMS Reverse Voltage	$V_{R(RMS)}$	210	280	350	420	V
Average Rectifier Forward Current Total Device (Rated $V_R$ ), $T_C=100$	$I_{F(AV)}$			5.0 10		A
Peak Repetitive Forward Current (Rate $V_R$ , Square Wave, 20kHz)	$I_{FM}$		10			A
Non-Repetitive Peak Surge Current (Surge applied at rate load conditions halfwave, single phase, 60Hz)	$I_{FSM}$		100			A
Operating and Storage Junction Temperature Range	$T_J, T_{stg}$		-65 to +150			

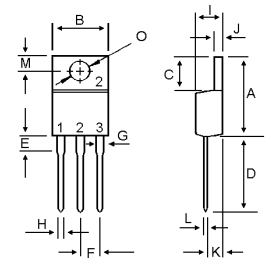

DIM	MILLIMETERS	
	MIN	MAX
A	14.68	15.32
B	9.78	10.42
C	6.02	6.52
D	13.06	14.62
E	3.57	4.07
F	2.42	2.66
G	1.12	1.36
H	0.72	0.96
I	4.22	4.98
J	1.14	1.38
K	2.20	2.98
L	0.33	0.55
M	2.48	2.98
O	3.70	3.90

### ELECTRIAL CHARACTERISTICS

Characteristic	Symbol	U10C30	U10C40	U10C50	U10C60	Unit
Maximum Instantaneous Forward Voltage ( $I_F=5.0$ Amp $T_C=25$ ) ( $I_F=5.0$ Amp $T_C=125$ )	$V_F$	1.30 1.16		1.50 1.38		V
Maximum Instantaneous Reverse Current ( Rated DC Voltage, $T_C=25$ ) ( Rated DC Voltage, $T_C=125$ )	$I_R$		5.0 200			$\mu$ A
Reverse Recovery Time ( $I_F=0.5$ A, $I_R=1.0$ , $I_{rr}=0.25$ A )	$T_{rr}$		50			ns
Typical Junction Capacitance (Reverse Voltage of 4 volts & $f=1$ MHz)	$C_P$	70		60		pF



# U10C30 Thru U10C60

FIG-1 TYPICAL FORWARD CHARACTERISTICS

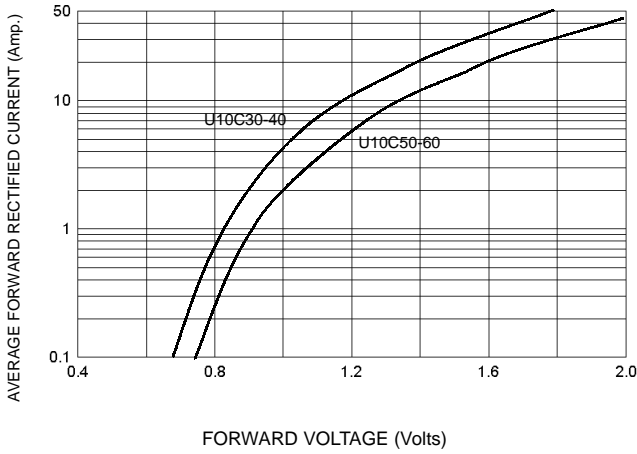


FIG-3 FORWARD CURRENT DERATING CURVE

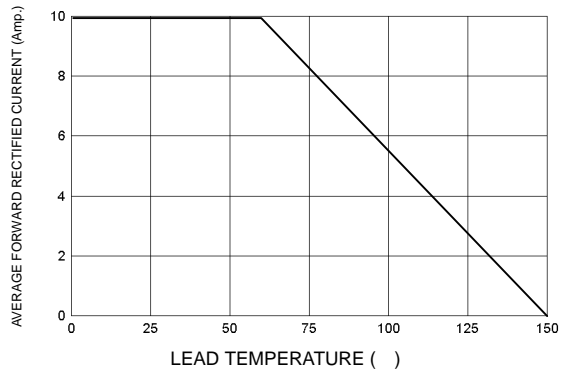


FIG-2 TYPICAL REVERSE CHARACTERISTICS

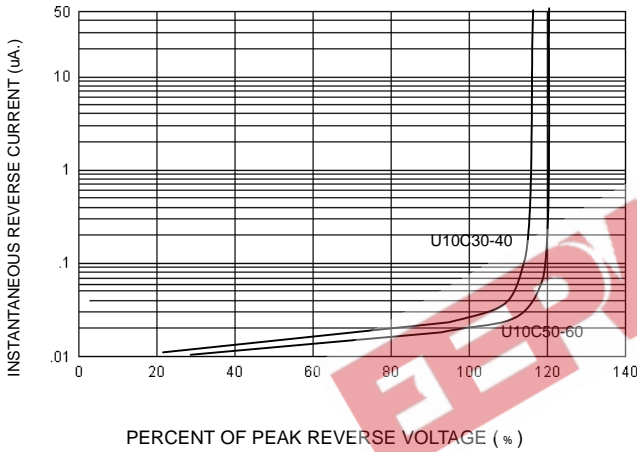


FIG-4 TYPICAL JUNCTION CAPACITANCE




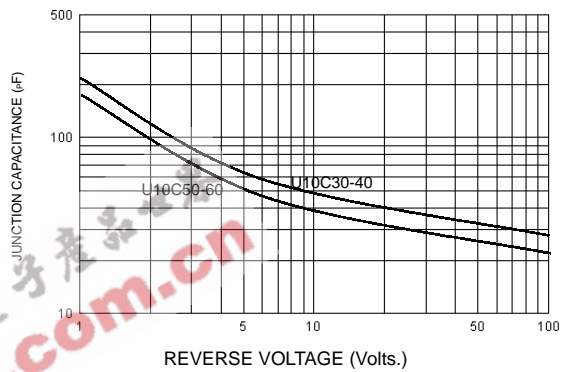


FIG-5 PEAK FORWARD SURGE CURRENT

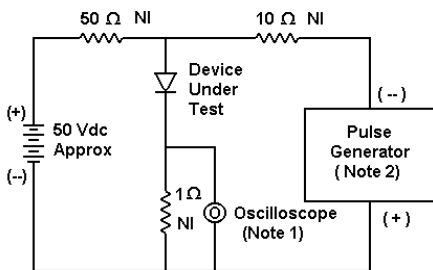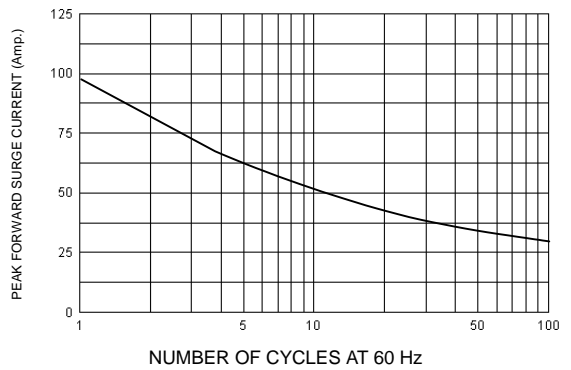

- Notes:
1. Rise Time = 7 ns max. Input Impedance = 1 M Ω, 22 pF
  2. Rise Time = 10 ns max. Input Impedance = 50 Ω

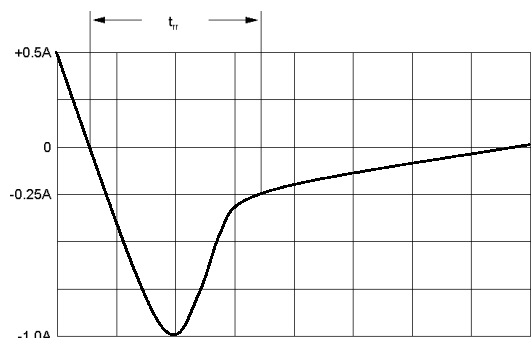

Set time base for 10/20 ns/cm

FIG-6 Reverse Recovery Time Characteristic and Test Circuit Diagram