




0233H SERIES

The H version of the 0233 series filter offers good common and differential mode insertion loss in an extremely small package.

This filter is well suited in applications where space is very limited.

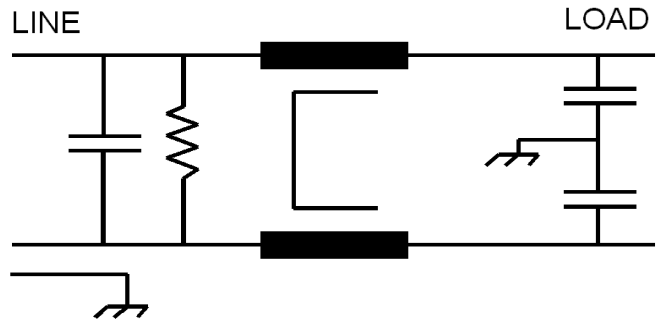

Operating Voltage = 115/250VAC
Operating Current = 1,3, & 6 amperes
Operating Frequency = 50/60 Hz
Operating Temperature = -20 to 50 deg. C
Dielectric Withstanding (Line-Ground) = 1500 VDC for 1 minute
Dielectric Withstanding (Line to Line) = 1500 VDC for 1 minutes
Leakage Current = 0.5 mA @ 250 VAC, 50Hz
Residual Voltage (Max after 5 sec.) = 34 Volts
Agency Approvals
UL, CSA, VDE

