

## FEATURES

- Cispr 22'B, 'Vcci'B', Fcc'B' Compliance
- Light Weight: 180g only
- Efficiency Over 70%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Operating Temperature 0°C~40°C



## SPECIFICATION


Item \ Model	A1-15S05	A1-18S05
Output Voltage	5V	5V
Output Current	3.0A	3.5A
Input Voltage	AC 90~264V	
Input Frequency	47~63Hz	
Input Current	0.6A Maximum	
Inrush Current	60A Maximum	
Line Regulation	2% Maximum	
Load Regulation	± 5%	
Ripple & Noise	50mV Maximum	
Efficiency	72% Typical	74% Typical
Temperature Coefficient	0.05%/°C	
Over-Voltage Protection	10V Maximum	10V Maximum
Operating Temperature	0~40°C	
Storage Temperature	-20~85°C	
Safety Description	UL, CUL, C-TICK, T-MARK	

(\*): Under Development (I/P): In Process


**Bothhand USA.** e-mail: [sales@bothhandusa.com](mailto:sales@bothhandusa.com) <http://www.bothhand.com>

462 Boston St - Topsfield, MA 01983 - Phone: 978-887-8050 - Fax: 978-887-5434

ORDERING INFORMATION

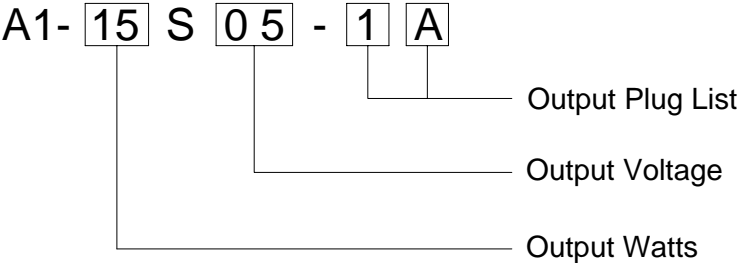

MECHANICAL

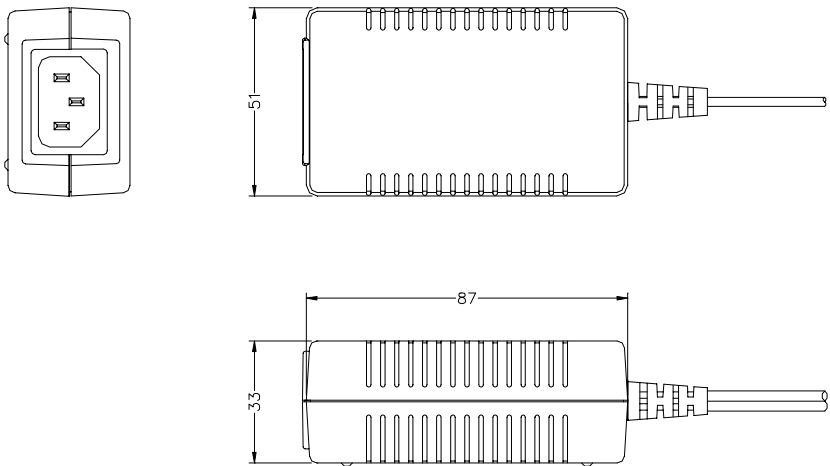

Unit: m.m.

Standard Output Cable:  
18AWG, UL SPT-1, 1200mm



**Bothhand USA.** e-mail: [sales@bothhandusa.com](mailto:sales@bothhandusa.com) <http://www.bothhand.com>

462 Boston St - Topsfield, MA 01983 - Phone: 978-887-8050 - Fax: 978-887-5434