

RU1JG

GLASS PASSIVATED FAST RECOVERY RECTIFIER

VOLTAGE: 600V

CURRENT: 1.0A




FEATURE

Molded case feature for auto insertion
High current capability
Low leakage current
Fast switching capability
High temperature soldering guaranteed
250°C /10sec/0.375" lead length at 5 lbs tension
Glass Passivated chip

MECHANICAL DATA

Terminal: Plated axial leads solderable per MIL-STD 202E, method 208C
Case: Molded with UL-94 Class V-0 recognized Flame Retardant Epoxy
Polarity: color band denotes cathode
Mounting position: any

DO - 41\DO- 204AL

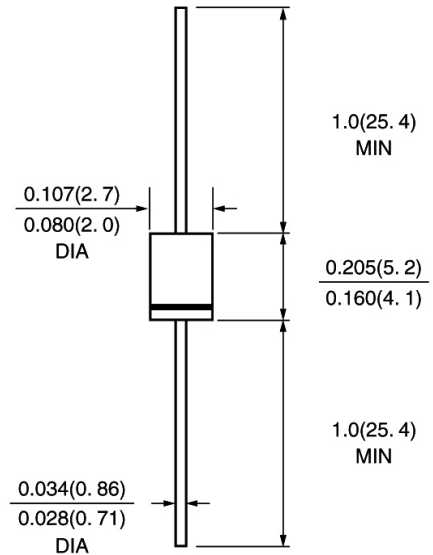

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half-wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated)

	SYMBOL	RU1JG	units
Maximum Recurrent Peak Reverse Voltage	V _{rrm}	600	V
Maximum RMS Voltage	V _{rms}	420	V
Maximum DC blocking Voltage	V _{dc}	600	V
Maximum Average Forward Rectified Current 3/8" lead length at T _a =55°C	I _{f(av)}	1.0	A
Peak Forward Surge Current 8.3ms single Half sine-wave superimposed on rated load	I _{fsm}	30.0	A
Maximum Instantaneous Forward Voltage at Rated forward current	V _f	1.3	V
Maximum DC Reverse Current T _a =25°C At rated DC blocking voltage T _a =100°C	I _r	10.0 100.0	μA
Typical Junction Capacitance (Note 1)	C _j	15.0	pF
Maximum Reverse Recovery Time (Note 2)	T _{rr}	100	nS
Storage and Operating Junction Temperature	T _{stg} , T _j	-55 to +150	°C

Note:

1. Measured at 1.0 MHz and applied voltage of 4.0Vdc
2. Test Condition I_f =0.5A, I_r =1.0A, I_{rr} =0.25A

Rev.A5

www.gulfsemi.com

RATINGS AND CHARACTERISTIC CURVES RU1JG

FIG. 1 - FORWARD CURRENT DERATING CURVE

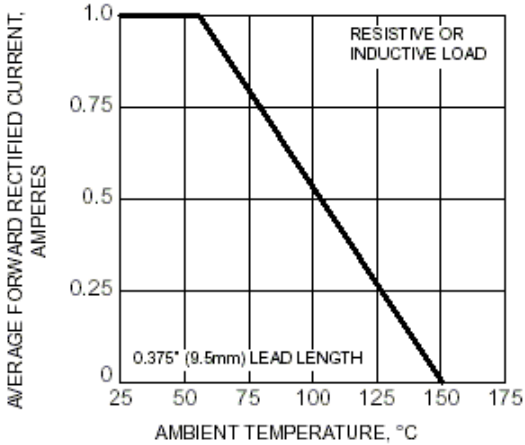


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

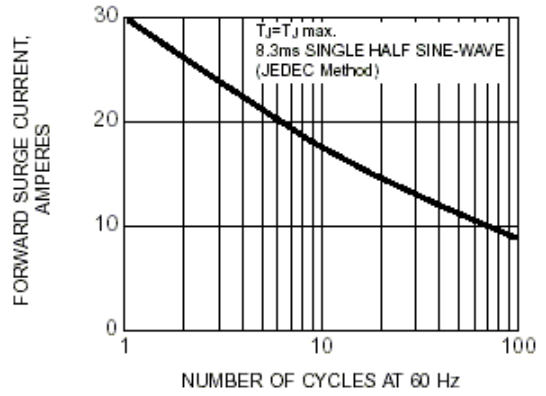


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

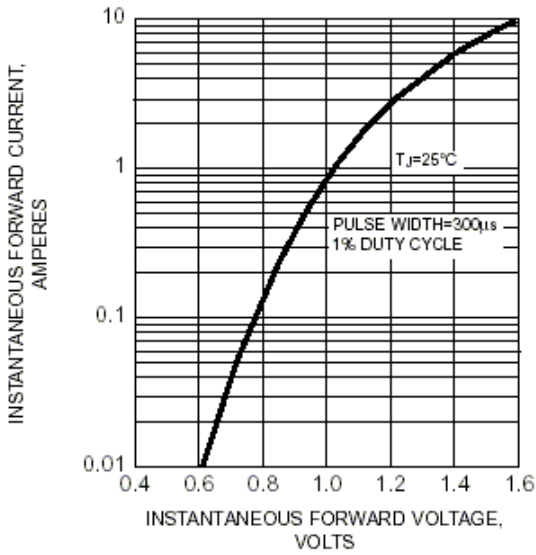


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

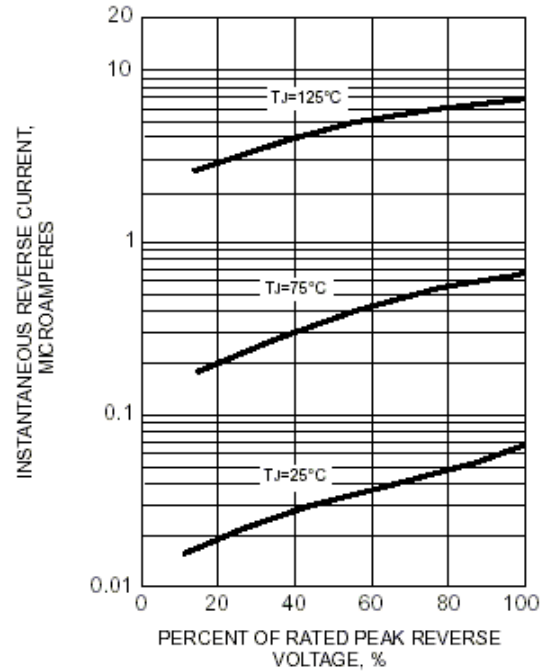


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

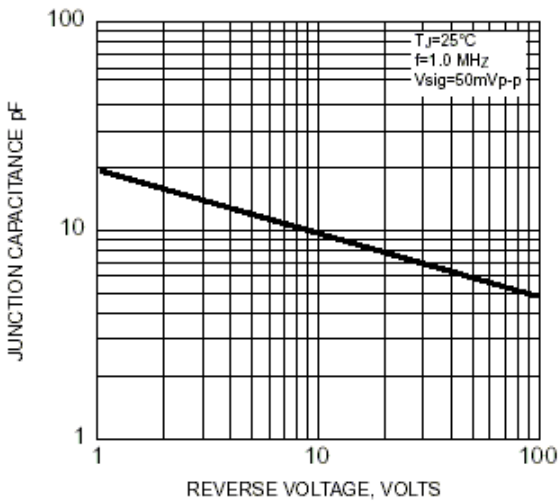


FIG. 6 - TYPICAL TRANSIENT THERMAL IMPEDANCE

