

Features

- 15pcs SMD LEDs
- 360 emitting angle
- Super bright
- No radiation
- Quick response

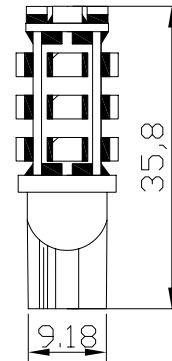
Applications

- Turn Signal Light
- Decorative Lighting
- You Can Decide

Outline Size

Unit: mm

Tolerance: ±0.30mm


Absolute Maximum Rating

(Ta=25 °C)

Item	Symbol	Value	Unit
Operating Temperature	Tope	-20 ~ +50	
Storage Temperature	Tstg	-20~ +70	

Picture

Electrical -Optical Characteristics

(Ta=25 °C)

Item	Symbol	Min.	Typ.	Max	Unit
Input Voltage(AC)	V _i	-	12	-	V
Input Current(AC)	I _i	-	90	-	mA
Power Dissipation	P _a	-	1.08	-	W
Chromaticity	x	-	0.31	-	
Coordinates	y	-	0.33	-	
Whole Luminous Flux*	Φ _v	-	110	-	lm
Beam Pattern	BP	-	120	-	Deg
Net Weight	W _{ei}	-	3.9	-	g

*Tolerance of luminous intensity is ±15%

Circuit
