


**P/N: TS6121K LF DATA SHEET****Feature**

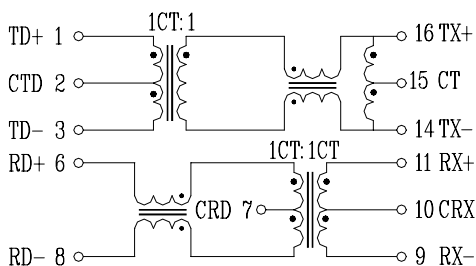
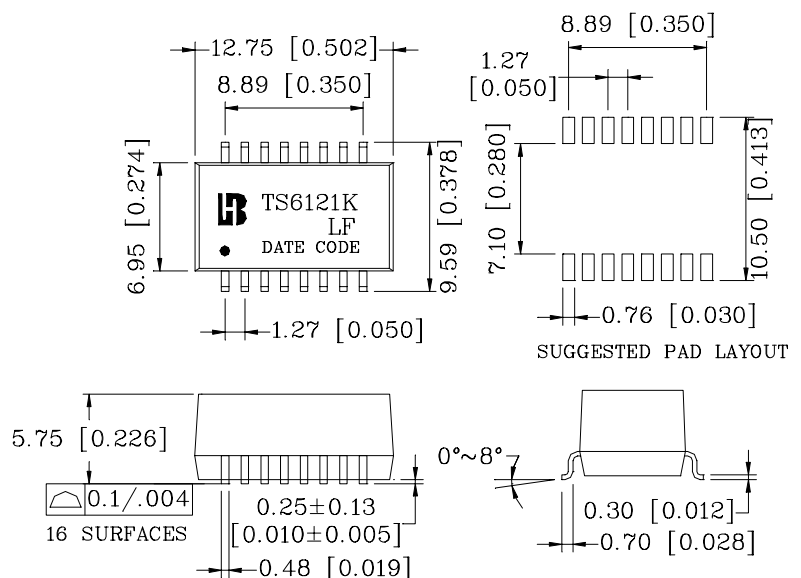
- Designed to meet IEEE 802.3u requirement, including 350uH OCL with 8mA bias.
- Lead free for external pins.
- Operating temperature range: 0°C to +70°C.
- Storage temperature range: -25°C to +125°C.

Electrical Specifications @ 25°C

Part Number	Turns Ratio		OCL (uH Min) @ 100KHz/0.1V with 8mA Bias	C _{w/w} (pF Max)	L.L. (uH Max)	DCR (Ω Max)		Insertion Loss (dB Max) 0.3-100MHz	HI-POT (Vrms) 1500
	TX	RX				1-3/11-9	16-14/6-8		
TS6121K LF	1CT:1	1CT:1CT	350	28	0.5	0.9	1.1	-1.15	

Continue

Part Number	Return Loss (dB Min)				Cross talk (dB Min)			DCMR (dB Min)		
	0.3-30MHz	40MHz	50MHz	60-80MHz	0.3-30MHz	60MHz	80-100MHz	0.3-30MHz	60MHz	100MHz
TS6121K LF	-18	-15.5	-13.0	-12	-50	-45	-40	-42	-35	-30

Schematic**Mechanical**

Units: mm [Inches] Tolerance: xx.x0±0.25 [0.010]
0.xx±0.05 [0.002]