


PCI Express Control of PXI Express (MXI-Express for PXI Express)

NI PXIe-PCle8361, NI PXIe-PCle8362, NI PCle-8361, NI PCle-8362, NI PXIe-8360

- Higher throughput
- PCI Express control of PXI Express/ CompactPCI Express
- Control of two PXI Express/ CompactPCI Express chassis from a single PCI Express board (NI PCle-8362)
- Sustained throughput
 - 208 MB/s (2 chassis, NI PXIe-PCle8362)
 - 92 MB/s (1 chassis, NI PXIe-PCle8361)
- Ability to use the same PCI Express boards (NI PCle-8361, NI PCle-8362) and cable as MXI-Express
- Software-transparent link that requires no programming
- Cabling up to 7 m
- Rugged connectivity

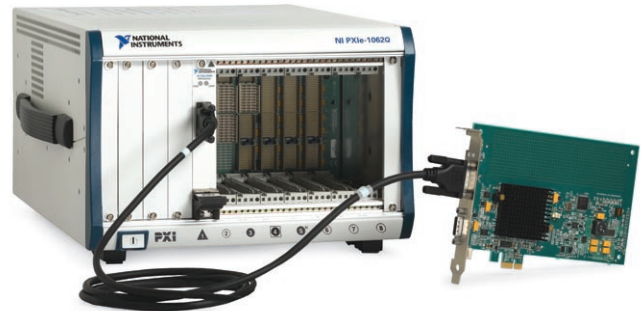

Overview

With NI MXI-Express for PXI Express interface kits, PC users with PCI Express slots can exercise direct control of PXI Express systems using cabled PCI Express technology. NI MXI-Express for PXI Express, a high-bandwidth serial link transparent to software applications and drivers, provides the ability to use high-performance desktop computers, servers, and workstations to control PXI Express systems.

PCI Express Control of PXI Express

With a MXI-Express for PXI Express link, you can transparently control a PXI Express system from any PCI Express slot, so you can use desktop computers, servers, and workstations to control PXI Express systems. MXI-Express for PXI Express features a transparent link where all PXI and PXI Express modules appear as PCI boards within the computer itself. However, you benefit from the increased number of slots, power and cooling per slot, module selection, and synchronization features provided by PXI. The MXI-Express for PXI Express link consists of an NI PCle-8361 or PCle-8362 board in the PC that is connected via a MXI-Express cable to an NI PXIe-8360 module in slot 1 of a PXI Express chassis. The NI PCle-8361 board provides one PCI Express link, which you can cable to an NI PXIe-8360 module in a PXI Express chassis. The NI PCle-8362 board provides two PCI Express links, each of which you can cable to individual NI PXIe-8360 modules in separate PXI Express chassis. Thus, you can use a single NI PCle-8362 board and two NI PXIe-8360 modules to simultaneously control two PXI Express systems. For your convenience, you can purchase either a complete MXI-Express for PXI Express kit with all necessary components or the PCI Express board, PXI Express module, and cable separately.

Cabled PCI Express Technology

The NI PCle-8361 and PCle-8362 boards provide one or two cabled PCI Express links, respectively. The links have x1 (“by one”) lane widths. The NI PXIe-8360 module connects these PCI Express links to the PCI Express bus used in the PXI Express chassis backplane. Thus, all PXI and PXI Express modules appear as PCI boards within the computer itself.

PCI Software Compatibility

PCI Express features software compatibility with PCI. Without making any modifications to your software, you can use the MXI-Express for PXI Express link with an application written for a PXI system controlled via a PCI or PCI Express remote controller, such as MXI-3, MXI-4, or MXI-Express.

Multichassis PXI Systems

You can use a single NI PCle-8362 board to simultaneously control two PXI Express systems. You also can incorporate multiple NI PCle-8361 or PCle-8362 boards in a PC with multiple PCI Express slots to add PXI Express chassis to a system. You cannot use an NI PXIe-8360 module to daisy chain multiple PXI Express chassis. However, using MXI-4, you can connect a PXI Express chassis to a PXI chassis in a star or daisy-chain configuration within a single system. To connect a PXI Express chassis to a PXI chassis with MXI-4, install an NI PXI-8331 (copper) or PXI-8336 (fiber-optic) module in any PXI peripheral slot of the master PXI Express chassis, and connect it with the appropriate cable to a second PXI-8331 or PXI-8336 in slot 1 of the slave PXI chassis.

PCI Express Control of PXI Express (MXI-Express for PXI Express)

Ordering Information

For online configuration of a complete PXI system, including chassis, modules, and all accessories, visit ni.com/pxiadvisor.

MXI-Express for PXI Express/CompactPCI Express Kit

NI PXIe-PCIe8362 779702-03
Kit includes one PCI Express board (NI PCIe-8362), one PXI Express module (NI PXIe-8360), and one 3 m cable.

NI PXIe-PCIe8361 779701-03
Kit includes one PCI Express board (NI PCIe-8361), one PXI Express module (NI PXIe-8360), and one 3 m cable.

MXI-Express for PXI Express Interface Module

NI PXIe-8360 779700-01

PCI Express MXI-Express Interface Board

NI PCIe-8362 779502-01

NI PCIe-8361 779504-01

MXI-Express/ExpressCard MXI Cables

1 m 779500-01

3 m 779500-03

7 m 779500-07

BUY NOW

For complete product specifications, pricing, and accessory information, call 800 813 3693 (U.S.) or go to ni.com/pxiadvisor.

PCI Express Control of PXI Express (MXI-Express for PXI Express)

Specifications

Specifications are subject to change without notice.

Bus Interface

Form factor x1 PCI Express
 Slot compatibility x1, x4, x8, and x16¹
 PCI Express slots

¹Some motherboard manufacturers intend the x16 slot for graphics use and preinstall a graphics board. Check with the motherboard manufacturer for alternative graphics solutions if using the x16 slot for a nongraphics board.

Power Requirements

	Power Rail	Typical Current	Maximum Current
NI PXIe-8360	+3.3 V	2.5 A	3 A
	+5 V	0 A	0 A
	+12 V	0 A	0 A
	+5 V _{AUX}	0.3 A	0.4 A
NI PCIe-8361	+3.3 V	1.800 A	2.000 A
	+3.3 V _{AUX}	0 A	0 A
	+12 V	0 A	0 A
NI PCIe-8362	+3.3 V	580 mA	1.040 A
	+3.3 V _{AUX}	10 mA	50 mA
	+12 V	0 A	0 A

Physical

Dimensions

NI PXIe-8360 10.0 by 16.0 cm (3.9 by 6.3 in.)
 NI PCIe-8361 10.7 by 17.5 cm (4.4 by 6.9 in.)
 NI PCIe-8362 9.93 by 7.11 cm (3.91 by 2.8 in.)

Slot requirements

NI PXIe-8360 One 3U PXI Express system controller slot
 NI PCIe-8361 and PCIe-8362 One PCI Express slot

Maximum cable length 7 m

Compatibility Fully compatible with the PXI Express Hardware Specification, Revision 1.0 and the PICMG CompactPCI Express EXP.0 R1.0 Specification

Operating Environment

NI PXIe-8360, PCIe-8361, PCIe-8362

Ambient temperature range 0 to 55 °C
 (tested in accordance with IEC-60068-2-1 and IEC-60068-2-2; meets MIL-PRF-28800F Class 3 low temperature limit and MIL-PRF-28800F Class 2 high temperature limit)
 Relative humidity range 10 to 90%, noncondensing
 (tested in accordance with IEC-60068-2-56)

Maximum altitude 2,000 m
 Pollution Degree 2
 Indoor use only.

Storage Environment

NI PXIe-8360

Ambient temperature range -40 to 71 °C
 (tested in accordance with IEC-60068-2-1 and IEC-60068-2-2; meets MIL-PRF-28800F Class 3 limits)
 Relative humidity range 5 to 95%, noncondensing
 (tested in accordance with IEC-60068-2-56)

NI PCIe-8361

Ambient temperature range -20 to 70 °C
 (tested in accordance with IEC-60068-2-1 and IEC-60068-2-2)
 Relative humidity range 5 to 95%, noncondensing
 (tested in accordance with IEC-60068-2-56)

NI PCIe-8362

Ambient temperature range -40 to 70 °C
 (tested in accordance with IEC-60068-2-1 and IEC-60068-2-2)
 Relative humidity range 5 to 95%, noncondensing
 (tested in accordance with IEC-60068-2-56)

Shock and Vibration

NI PXIe-8360

Operating 30 g peak, half-sine, 11 ms pulse
 (tested in accordance with IEC-60068-2-27; meets MIL-PRF-28800F Class 2 limits)

Random Vibration

Operating 5 to 500 Hz, 0.3 g_{rms}
 Nonoperating 5 to 500 Hz, 2.4 g_{rms}
 (tested in accordance with IEC-60068-2-64; nonoperating test profile exceeds the requirements of MIL-PRF-28800F, Class 3)

Note: For full EMC compliance, operate this device with shielded cabling. In addition, all covers and filler panels must be installed. Refer to the Declaration of Conformity (DoC) for this product for any additional regulatory compliance information. To obtain the DoC for this product, visit ni.com/certification, search by model number or product line, and click the appropriate link in the Certification column.

NI Services and Support



NI has the services and support to meet your needs around the globe and through the application life cycle – from planning and development through deployment and ongoing maintenance. We offer services and service levels to meet customer requirements in research, design, validation, and manufacturing.

Visit ni.com/services.

Training and Certification

NI training is the fastest, most certain route to productivity with our products. NI training can shorten your learning curve, save development time, and reduce maintenance costs over the application life cycle. We schedule instructor-led courses in cities worldwide, or we can hold a course at your facility. We also offer a professional certification program that identifies individuals who have high levels of skill and knowledge on using NI products.

Visit ni.com/training.

Professional Services

Our NI Professional Services team is composed of NI applications and systems engineers and a worldwide National Instruments Alliance Partner program of more than 600 independent consultants and integrators. Services range from



start-up assistance to turnkey system integration. Visit ni.com/alliance.

OEM Support

We offer design-in consulting and product integration assistance if you want to use our products for OEM applications. For information about special pricing and services for OEM customers, visit ni.com/oem.



ni.com ■ 800 813 3693

National Instruments ■ info@ni.com

Local Sales and Technical Support

In offices worldwide, our staff is local to the country, giving you access to engineers who speak your language. NI delivers industry-leading technical support through online knowledge bases, our applications engineers, and access to 14,000 measurement and automation professionals within NI Developer Exchange forums. Find immediate answers to your questions at ni.com/support.

We also offer service programs that provide automatic upgrades to your application development environment and higher levels of technical support. Visit ni.com/ssp.

Hardware Services

System Assurance Programs

NI system assurance programs are designed to make it even easier for you to own an NI system. These programs include configuration and deployment services for your NI PXI, CompactRIO, or Compact FieldPoint system. The NI Basic System Assurance Program provides a simple integration test and ensures that your system is delivered completely assembled in one box. When you configure your system with the NI Standard System Assurance Program, you can select from available NI system driver sets and application development environments to create customized, reorderable software configurations. Your system arrives fully assembled and tested in one box with your software preinstalled. When you order your system with the standard program, you also receive system-specific documentation including a bill of materials, an integration test report, a recommended maintenance plan, and frequently asked question documents. Finally, the standard program reduces the total cost of owning an NI system by providing three years of warranty coverage and calibration service. Use the online product advisors at ni.com/advisor to find a system assurance program to meet your needs.

Calibration Services

NI recognizes the need to maintain properly calibrated devices for high-accuracy measurements. We provide manual calibration procedures, services to recalibrate your products, and automated calibration software specifically designed for use by metrology laboratories. Visit ni.com/calibration.

Repair and Extended Warranty

NI provides complete repair services for our products. Express repair and advance replacement services are also available. We offer extended warranties to help you meet project life-cycle requirements. Visit ni.com/services.