


Specifications:

plug description (1)	stereo plug, 3.5 mm, brass, nickel plated, white insulators, P/N 50-00086
plug overmold (2)	inner mold: 30P, PVC, white; outer mold: 60P, PVC, white
cable description (3)	0.12 x 7 strands, 3 conductor (red, white, green), 0.12 x 54 shield with aluminum, 1F, PVC jacket
cable outer diameter	Ø3.8 mm
cable color	white
cable gauge	AWG #28
cable length	1830 ± 50
twist tie (3)	black, 89 ± 3


Notes:

Function test: no open, no reversed polarity, no short circuit, no INT
 RoHS compliant

Mechanical drawing:

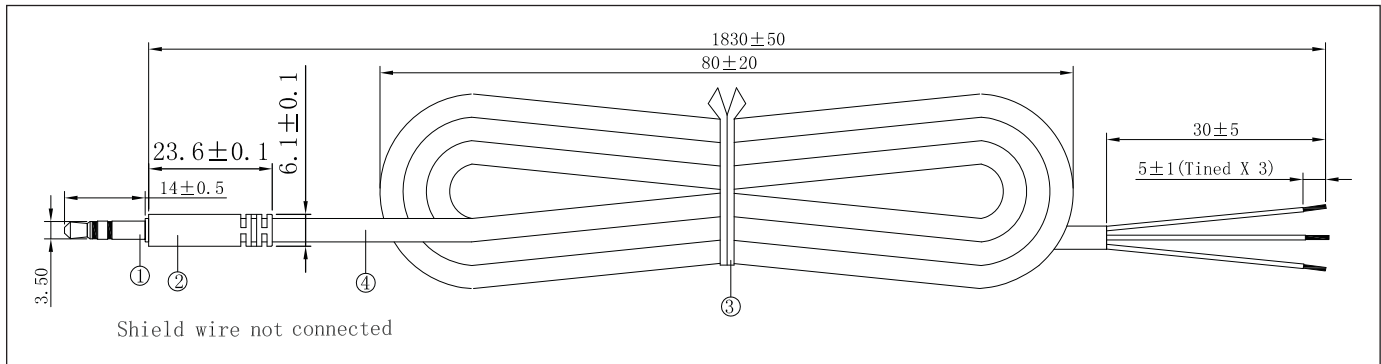

Wire diagram:



Initial _____ Date _____

tolerance X: ±0.5 mm .X: ±0.3 mm .XX: ±0.05 mm
 applicable unless otherwise indicated in specification or on drawings

Revision notes:

Rev	Date	Description
A	April 16, 2010	initial release

Specification Approval

Spec sign-off verifies that you have reviewed the entire specification, tested a sample of the product, and confirm that it meets your requirements. This specification reflects the part as it will be ordered. Orders will not be processed until the specification pages have been initialed and the approval page has been signed. This specification is confidential and is not to be transmitted without prior approval from Tensility.

Signature _____

Title _____

Name _____

Date _____