

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0906351241

Status:

Active

Overview:

qf50

Description:

1.27mm (.050") Pitch QF-50™, Single Beam, Vertical MIL/DIN Version, 0.10µm (4µ") Gold (Au), 24 Circuits

Documents:

3D Model

Drawing (PDF)

Product Specification PS-99020-0015 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

Series

Comments

Component Type

Glow-Wire Compliant

Overview

Product Name

Ribbon Cable / Wire Trap Connectors

90635

Preloaded Upper Housing

Housing

No

qf50

QF-50™

Physical

Circuits (Loaded)

Color - Resin

Durability (mating cycles max)

Entry Angle

Flammability

Lock to Mating Part

Material - Metal

Material - Plating Mating

Material - Plating Termination

Material - Resin

Number of Rows

PCB Retention

Packaging Type

Pitch - Mating Interface (in)

Pitch - Mating Interface (mm)

Plating min: Mating (µin)

Plating min: Mating (µm)

Plating min: Termination (µin)

Plating min: Termination (µm)

Polarized to Mating Part

Shrouded

Stackable

Surface Mount Compatible (SMC)

Temperature Range - Operating

Termination Interface: Style

Wire Insulation Diameter

Wire Size AWG

Wire/Cable Type

24

Black

300

90° Angle

94V-0

None

Phosphor Bronze

Gold

Tin

Polyester

2

None

Tray

0.050 In

1.27 mm

4

0.1

39

1

Yes

Fully

No

N/A

-25°C to +85°C

IDT or Pierce

1.14mm (.045") max.

26, 28

Ribbon Cable


Electrical

Current - Maximum per Contact

Voltage - Maximum

1A

250V AC/DC



Series

image - Reference only

EU RoHS

ELV and RoHS Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Reviewed

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

90635Series

Mates With

90663

Use With

90170

Application Tooling FAQ	
Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.	
Global	
Description	Product #
Semi-Automatic Bench Press	0691271150
PB15 C/W Cable Sensor for 90635 Connectors	
Changehead for Parallel	0690080250

Material Info

Reference - Drawing Numbers

Product Specification
Sales Drawing

PS-99020-0015
SDA-90635

Action Handtool
69008-0949, for
QF-50™ and
MX-50™ Connectors
Arbor Press Fixture 0690200680

This document was generated on 05/31/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

10 9 8 7 6 5 4 3 2 1

NOTES: 1. MATERIAL:

HOUSING: POLYESTER, G.F. (UL 94V-0), COLOUR - BLACK.

TERMINAL: PHOSPHOR BRONZE.

2. TERMINAL PLATING:

90635-***1 : CONTACT AREA: GOLD FLASH (0.1um)/ 4uin MIN.

I.D. AREA: TIN (1um)/ 39uin MIN. OVER

NICKEL (1um)/ 39uin MIN.

90635-***2 :CONTACT AREA: GOLD (0.76um)/ 30uin MIN

I.D. AREA: TIN (1um)/ 39uin MIN. OVER

NICKEL (1um)/ 39uin MIN.

90635-***3 :CONTACT AREA: GOLD (0.38um)/ 15uin MIN

I.D. AREA: TIN (1um)/ 39uin MIN. OVER

NICKEL (1um)/ 39uin MIN.

90635-***4 :CONTACT AREA: GOLD (0.51um)/ 20uin MIN

I.D. AREA: TIN (1um)/ 39uin MIN. OVER

NICKEL (1um)/ 39uin MIN.. 20 & 50 CIRCUIT SIZES ONLY

3. FOR USE WITH No. 26 & 28 AWG STRANDED WIRE (7 CONDUCTORS)
AND No. 28 SOLID WIRE 1.14/(.045) DIA. MAX. INSULATION RIBBON
CABLE WITH 1.27/(.050) CENTERS.

4. MATING STRAIN RELIEF: MOLEX No. 90170.


5. DIMENSION "E" IS TOTAL HEIGHT AFTER ASSEMBLED WITH CABLE.
E= 10.5/(.413) REF. WITHOUT STRAIN RELIEF.

E= (15.2)/.598 MAX. WITH STRAIN RELIEF No. 90170.

(14.5)/.571 REF. WHEN COMPRESSED .

6. FOR PRODUCT SPECIFICATION, SEE PS 99020-0015.

64	90635-64*	(78.74) 3.100	(82.54) 3.250	(83.31) 3.280	(85.88) 3.381
60	90635-60*	(73.66) 2.900	(77.46) 3.050	(78.23) 3.080	(80.80) 3.181
50	90635-50*	(60.96) 2.400	(64.76) 2.55	(65.53) 2.580	(68.10) 2.681
40	90635-40*	(48.26) 1.900	(52.06) 2.050	(52.83) 2.080	(55.40) 2.181
34	90635-34*	(40.64) 1.600	(44.44) 1.750	(45.21) 1.780	(47.78) 1.881
30	90635-30*	(35.56) 1.400	(39.36) 1.550	(40.13) 1.580	(42.70) 1.681
26	90635-26*	(30.48) 1.200	(34.28) 1.350	(35.05) 1.380	(37.62) 1.481
24	90635-24*	(27.94) 1.100	(31.74) 1.250	(32.51) 1.280	(35.08) 1.381
20	90635-20*	(22.86) .900	(26.66) 1.050	(27.43) 1.080	(30.00) 1.181
16	90635-16*	(17.78) .700	(21.58) .850	(22.35) .880	(24.92) .981
14	90635-14*	(15.24) .600	(19.04) .750	(19.81) .780	(22.38) .881
10	90635-10*	(10.16) .400	(13.96) .550	(14.73) .580	(17.30) .681
NO. OF CKT.	ENG. NO.	A	B	C	D REF.

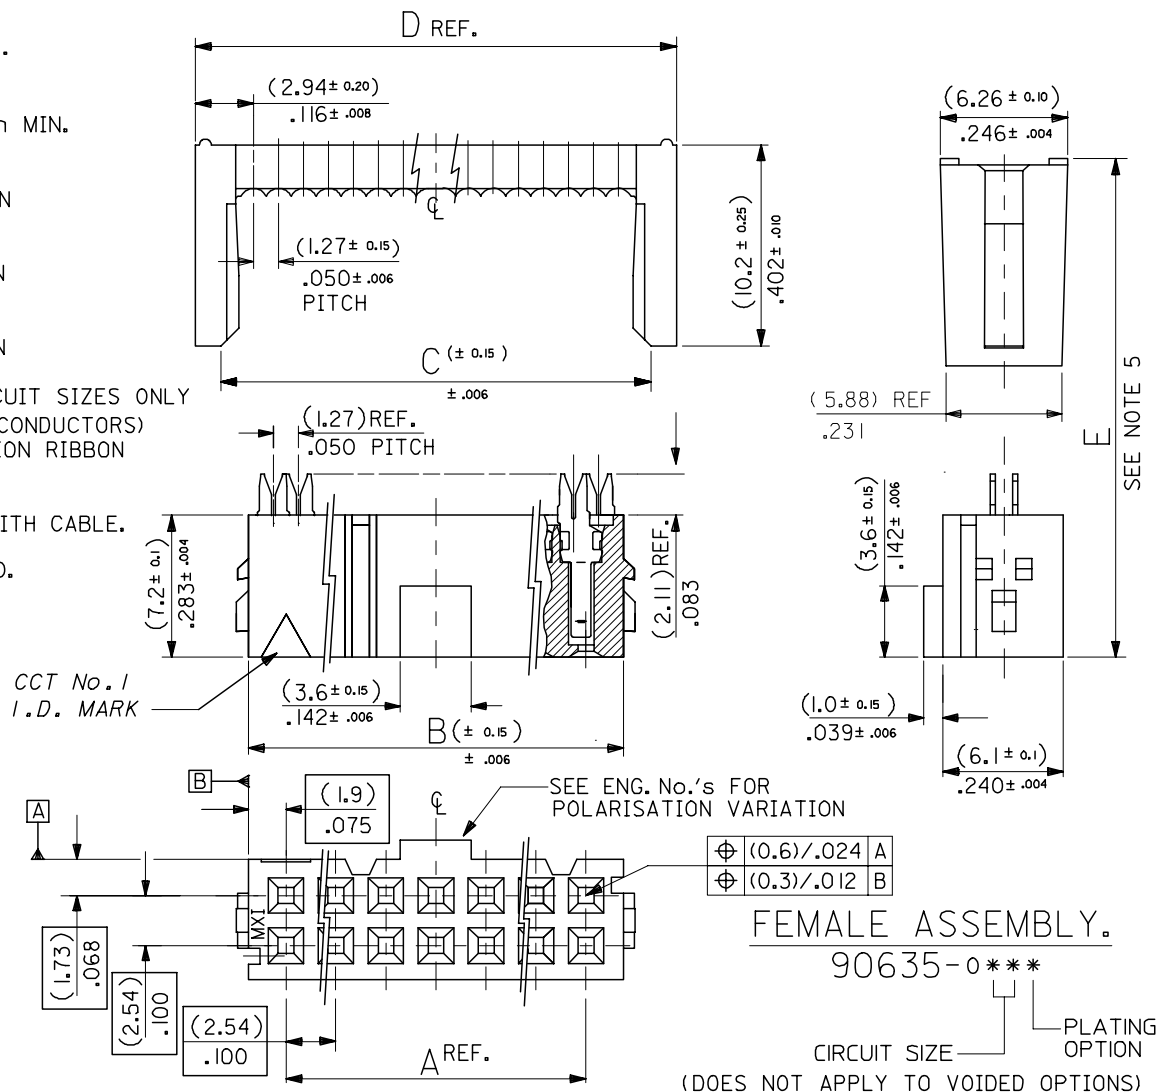

REMOVED POLARIZATION EC NO: E2007-0495 DRWN:DBYRNES 2006/12/06 CHKD: 2006/12/07 APPR:EOMAHONY 2006/12/07	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION				
				mm	INCH	DRAWN BY POB	DATE 1990/09/25	TIK FLECS SINGLE BEAM FEMALE ASSEMBLY					
			4 PLACES	± ---	± ---	CHECKED BY JDENNEHY	DATE 2005/08/10						
			3 PLACES	± ---	± ---	APPROVED BY JDENNEHY	DATE 2005/08/10						
			2 PLACES	± ---	± ---	MATERIAL NO.		DOCUMENT NO. SDA-90635		SHEET NO. 1 OF 3			
			1 PLACE	± ---	± ---								
			ANGULAR ± ---°		SEE CHART								
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

9 8 7 6 5 4 3 2 1

NOTES: 1. MATERIAL:

HOUSING: POLYESTER, G.F. (UL 94V-0), COLOUR - BLACK.
TERMINAL: PHOSPHOR BRONZE.

2. TERMINAL PLATING:

90635-***1: CONTACT AREA: GOLD FLASH (0.1um)/ 4uin MIN.

I.D. AREA: TIN (1um)/ 39uin MIN. OVER

NICKEL (1um)/ 39uin MIN.

90635-***2: CONTACT AREA: GOLD (0.76um)/ 30uin MIN

I.D. AREA: TIN (1um)/ 39uin MIN. OVER

NICKEL (1um)/ 39uin MIN.

90635-***3: CONTACT AREA: GOLD (0.38um)/ 15uin MIN

I.D. AREA: TIN (1um)/ 39uin MIN. OVER

NICKEL (1um)/ 39uin MIN.

90635-***4: CONTACT AREA: GOLD (0.51um)/ 20uin MIN

I.D. AREA: TIN (1um)/ 39uin MIN. OVER

NICKEL (1um)/ 39uin MIN.

20 & 50 CIRCUIT SIZES ONLY.

3. FOR USE WITH No. 26 & 28 AWG STRANDED WIRE (7 CONDUCTORS)
AND No. 28 SOLID WIRE 1.14/(.045) DIA. MAX. INSULATION RIBBON
CABLE WITH 1.27/(.050) CENTERS.

4. MATING STRAIN RELIEF: MOLEX No. 90170.



5. DIMENSION "E" IS TOTAL HEIGHT AFTER ASSEMBLED WITH CABLE.

E = 10.5/(.413) REF. WITHOUT STRAIN RELIEF.

E = (15.2)/.598 MAX. WITH STRAIN RELIEF No. 90170.

(14.5)/.571 REF. WHEN COMPRESSED.

6. FOR PRODUCT SPECIFICATION, SEE PS 99020-0015.

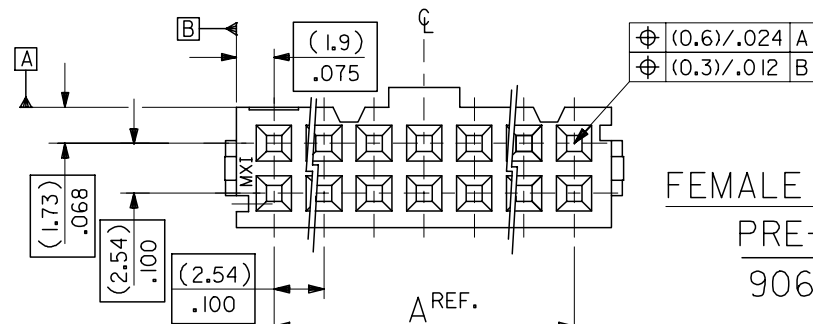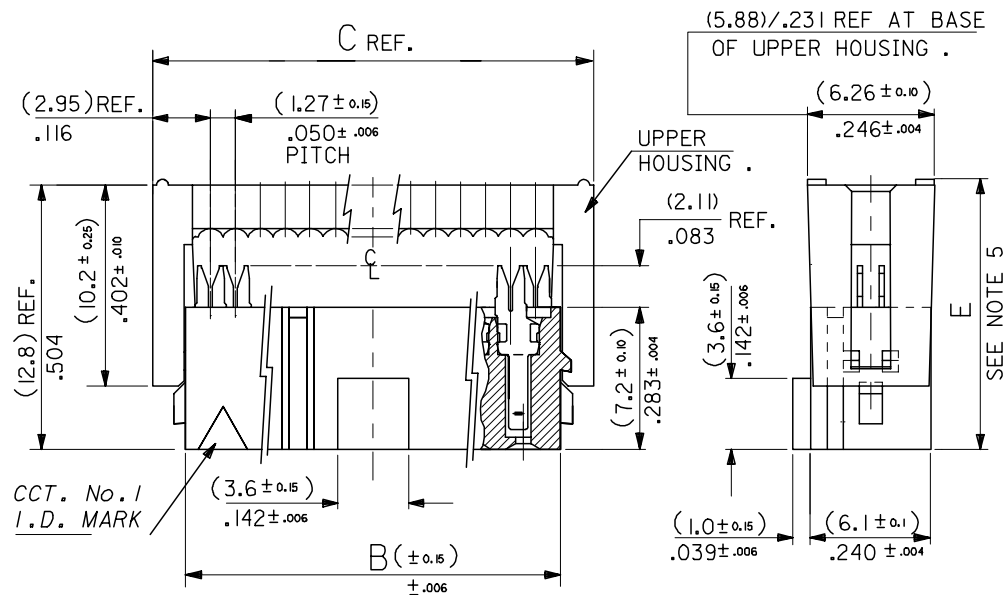

FEMALE ASSEMBLY.
PRE-LOADED.

90635-***

WITH POLARISATION = 1 OR 9

CIRCUIT SIZE

PLATING
OPTION

64	90635-64*	(78.74) 3.100	(82.54) 3.250	(85.88) 3.381
60	90635-60*	(73.66) 2.900	(77.46) 3.050	(80.80) 3.181
50	90635-50*	(60.96) 2.400	(64.76) 2.55	(68.10) 2.681
40	90635-40* 90635-9402 (CUSTOMER SPECIFIC)	(48.26) 1.900	(52.06) 2.050	(55.40) 2.181
34	90635-34*	(40.64) 1.600	(44.44) 1.750	(47.78) 1.881
30	90635-30*	(35.56) 1.400	(39.36) 1.550	(42.70) 1.681
26	90635-26*	(30.48) 1.200	(34.28) 1.350	(37.62) 1.481
24	90635-24*	(27.94) 1.100	(31.74) 1.250	(35.08) 1.381
20	90635-20*	(22.86) .900	(26.66) 1.050	(30.00) 1.181
16	90635-16*	(17.78) .700	(21.58) .850	(24.92) .981
14	90635-14*	(15.24) .600	(19.04) .750	(22.38) .881
10	90635-10*	(10.16) .400	(13.96) .550	(17.30) .681
NO. OF CKT.	ENG. NO.	A	B	C

REMOVED OPTION EC NO: E2007-0495 DRWN:DBYRNES 2006/12/06 CHKD: 2006/12/07 APPR:EOMAHONY 2006/12/07	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM/IN		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
				mm	INCH	DRAWN BY POB	DATE 1990/09/25	QIK FLECS SINGLE BEAM FEMALE ASSEMBLY, PRE-LOADED				
			4 PLACES	± ---	± ---	CHECKED BY JDENNEHY	DATE 2005/08/10					
			3 PLACES	± ---	± ---	APPROVED BY JDENNEHY	DATE 2005/08/10					
			2 PLACES	± ---	± ---	MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
			1 PLACE	± ---	± ---	SEE CHART		SDA-90635		2 OF 3		
			ANGULAR ± ---°			SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS									