

OCO-M20AS

Through hole OCXO
Sine wave

QuartzCom
the communications company





Features

- Applications: CDMA, 3G, networking, instrumentation
- High frequency stability vs. temperature
- Wide operating temperature range: -40 up to +85 °C
- Low aging

Parameter	Specification	
	OCO-M20AS5	OCO-M20AS12
Frequency range	8.1920 ~ 20.0000 MHz	
Standard frequencies	10.00, 12.80, 13.00, 16.384 & 20.00 MHz	
Frequency stability vs. operating temperature range	$\leq \pm 3 \times 10^{-9}$	over -40 ~ +85 °C
	$\leq \pm 2 \times 10^{-9}$	over -20 ~ +70 °C
	$\leq \pm 1 \times 10^{-9}$	over -10 ~ +60 °C
vs. supply voltage change	$\leq \pm 5 \times 10^{-10}$	±5 %
vs. load change	$\leq \pm 5 \times 10^{-10}$	±5 %
vs. aging after 30 days of operation	$\leq \pm 3 \times 10^{-8}$	1 st year
Short term stability	$< 5 \times 10^{-12}$	Allan deviation per 1 s
Output waveform	sine wave	> 300 mV (rms)
Output load	50 Ω	±10 %
Supply voltage	+5.0 V ±5 %	+12 V ±5 %
Steady-state current consumption @ +25 °C	< 400 mA	< 150 mA
Warm-up time	< 3 min	< ±2 x 10 ⁻⁸ @ +25 °C
Frequency pulling range	> ±4 x 10 ⁻⁷	positive slope
Vcontrol (Vc) via external voltage	0 ~ +4.5 V	0 ~ +5.0 V
Vcontrol (Vc) via external potentiometer	20 kΩ	
Reference voltage output (Vref)	+4.5 V	+5.0 V
Phase noise @ 10 MHz carrier frequency & Vdc = 12 V	< -130 dBc/Hz @ 10 Hz	
	< -150 dBc/Hz @ 100 Hz	
	< -157 dBc/Hz @ 1 kHz	
	< -159 dBc/Hz @ 10 kHz	
Operating temperature range	-10 ~ +60 °C, -20 ~ +70 °C, -40 ~ +70 °C or -40 ~ +85 °C	
Storage temperature range	-55 ~ +85 °C	
Customer specifications on request		

Environmental test


vibration	acceleration: 5 g; 10 Hz up to 200 Hz and down to 10 Hz; all 3 axes, 4.5 h/axis	
shock	75 g, half-sine, 3 ms (3 shocks each, 6 directions)	




Pin function

- # 1 Vdc
- # 2 RF output
- # 3 GND
- # 4 Vc
- # 5 Vref

Case height H = 12.7 mm



Circuit diagram

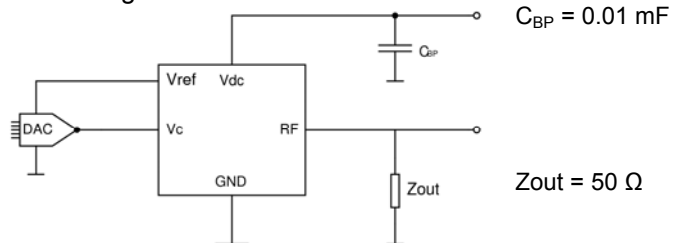

2002/95/EC RoHS compliant

QuartzCom AG
sales@quartzcom.com

www.quartzcom.com

QuartzCom Asia
sales-asia@quartzcom.com

QuartzCom USA
sales-usa@quartzcom.com

12 May. 10

ISO 9001
BUREAU VERITAS
Certification

