



SB1060LCT

DUAL LOW VF SCHOTTKY RECTIFIER

VOLTAGE 60 Volts **CURRENT** 10 Amperes

FEATURES


- Low forward voltage drop, low power losses
- High efficiency operation
- In compliance with EU RoHS 2002/95/EC directives

MECHANICAL DATA

Case : TO-220AB, Plastic

Terminals : Solderable per MIL-STD-750, Method 2026

Weight: 0.065 ounces, 1.859 grams

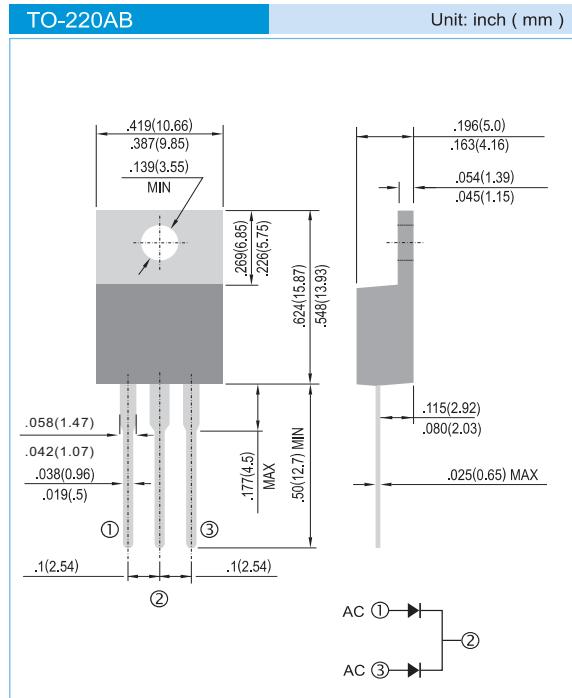

MAXIMUM RATINGS(T_A=25°C unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNIT
Maximum repetitive peak reverse voltage	V _{RRM}	60	V
Maximum average forward rectified current (Fig.1) per device per diode	I _{F(AV)}	10 5	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load per diode	I _{FSM}	125	A
Typical thermal resistance	R _{θJC}	2.5	°C / W
Operating junction	T _J	-55 to + 125	°C
Storage temperature range	T _{STG}	-55 to + 150	°C

ELECTRICAL CHARACTERISTICS(T_A=25°C unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Breakdown voltage	V _{BR}	I _R =1mA	68	-	-	V
Instantaneous forward voltage per diode ⁽¹⁾	V _F	I _F =2.5A I _F =5A T _J =25°C	-	0.40 0.45	- 0.48	V
		I _F =2.5A I _F =5A T _J =125°C	-	0.30 0.39	- 0.45	V
Reverse current per diode ⁽²⁾	I _R	V _R =60V T _J =25°C T _J =100°C	-	200 -	500 30	μA mA

Note.1.Pulse test : 300μs pulse width, 1% duty cycle

2.Pulse test : pulse width < 40ms



SB1060LCT

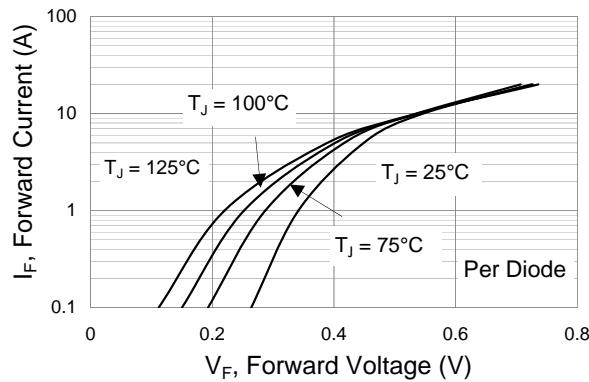


Fig.1 Typical Forward Characteristics

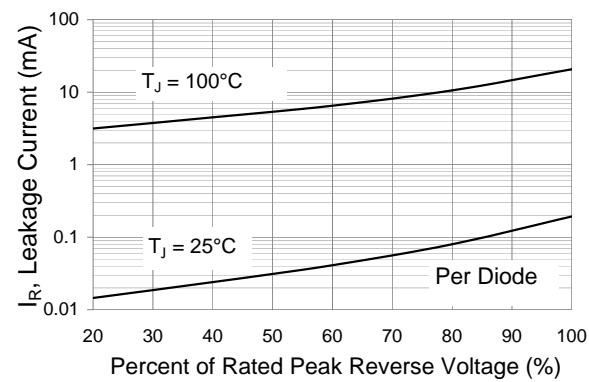


Fig.2 Typical Reverse Characteristics

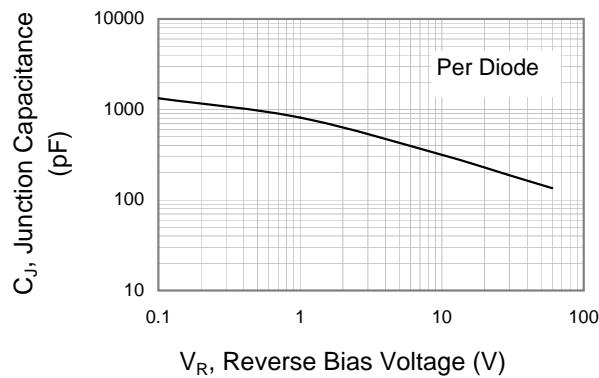


Fig.3 Typical Junction Capacitance

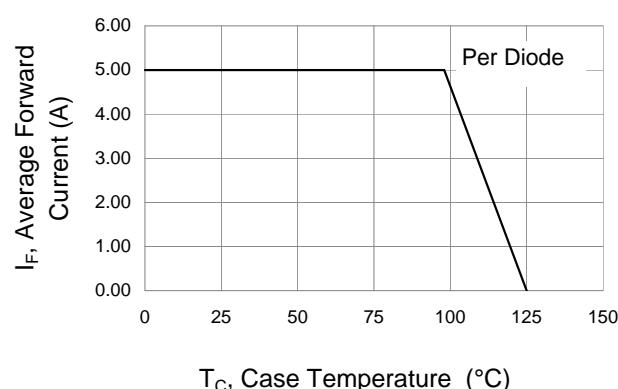


Fig.4 Forward Current Derating Curve