

IF SAW Filter for CATV System Image

For Industrial Use

Features

- A filter with superb filter characteristics.
- It has not been adjusted.
- Highly reliable.




Pb Free

RoHS Compliant
Directive 2002/95/EC

Specifications

Model	WF019A	
Nominal frequency : f_0 (MHz)	58.75	
3-dB passband width (MHz)	+0.75 / -4.08 min.	
In-band deviation (-3.58 to 0MHz max.)(dB)	±1 max	
Insertion loss (dB)	32max.	
Guaranteed attenuation (dB)	$f_0-5.25$ to -4.45 MHz	32min.
	$f_0+1.25$ to $+3$ MHz	30min.
Input impedance (Ω)	75	
Output impedance (Ω)	75	
Operating temperature range ($^{\circ}$ C)	-20 to +60	
Package model name	PK-2(a)	

Dimensions

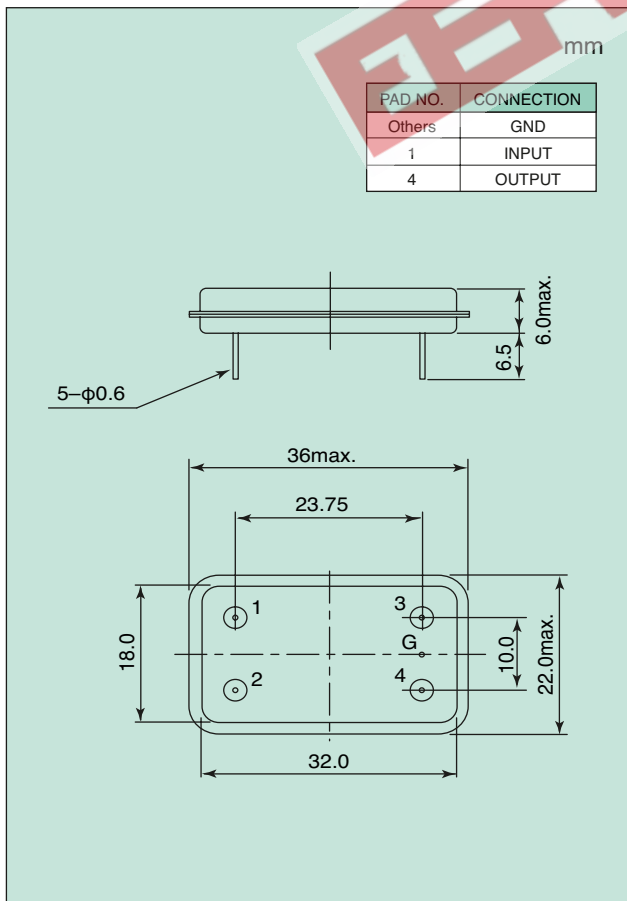

Characteristics

